

1402-3V1310



COMMERCIAL AIR CONDITIONERS

DC Inverter VRF Series 50Hz

V4 PLUS K Series, Mini VRF

DC Inverter VRF Series 50Hz (V4 PLUS K Series, Mini VRF)



GD Midea Heating & Ventilating Equipment Co., Ltd.
Is certified under the ISO 9001 International standard
for quality assurance.
NO.01 100 019209



GD Midea Heating & Ventilating Equipment Co., Ltd.
Is certified under the ISO 14001 International standard
for environmental management.
Certificate No.15912E10020R0L

Commercial Air Conditioner Business Units Midea Group

Add: West region of Midea commercial air conditioner department, Industry Avenue,
Beijiao, Shunde, Foshan, Guangdong, P.R. China Postal code: 528311

Tel: +86-757-22390820 Fax: +86-757-23270470

<http://global.midea.com.cn>

<http://www.midea.com>

Note: The data in this book may be changed without notice for further improvement
on quality and performance.

Ver.2013.10

Dealer information






Midea CAC (MCAC)

As a key subsidiary of Midea Group, the Midea Central Air Conditioner (MCAC) business unit has emerged as a leading supplier of commercial solutions. Since 1999 MCAC has contributed to the R&D and innovation of technologically-based commercial solutions. Cooperation with leading global enterprises coupled with independent R&D has enabled MCAC to implement thousands of commercial air-conditioning projects worldwide.

At present, MCAC is one of the globally leading product suppliers, underpinned by a mature marketing, sales, and project design framework.

There are three production bases in Shunde, Chongqing and Hefei.
 MCAC Shunde: 38 product lines focusing on VRF (DC inverters and digital scroll products), split products, heat pump water heaters, and AHU/FCU.
 MCAC Chongqing: 14 product lines focusing on water cooled centrifugal/screw/scroll chillers, air cooled screw/scroll chillers, and AHU/FCU.
 MCAC Hefei: 11 product lines focusing on VRF, chillers, and heat pump water heaters.

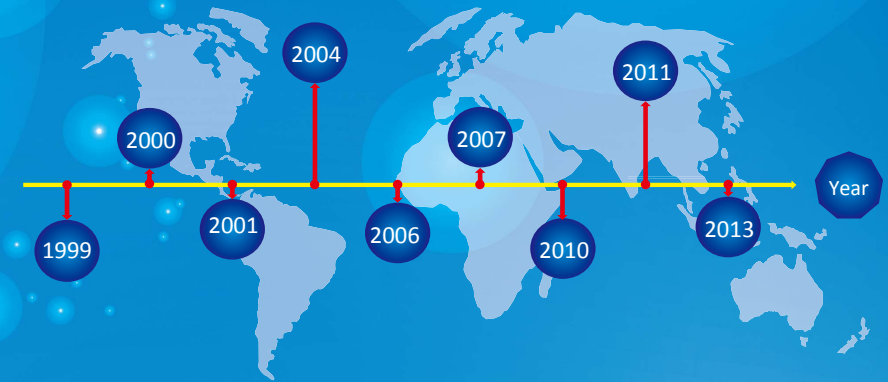

- 2013 Launched the super high efficiency centrifugal chiller with full falling film technology
- 2011 Launched the DC inverter V4 Plus globally
- 2010 Built the 3rd manufacturing base in Hefei
- 2007 Won the first Midea centrifugal chiller project oversea
- 2006 Launched the first VSD centrifugal chiller
- 2004 Acquired MGRE entered the chiller industry
- 2001 Partnered with Copeland to develop the digital scroll VRF system
- 2000 Developed the first inverter VRF With Toshiba
- 1999 Entered the CAC field



Outdoor Units Lineup

V4 Plus K Series

Full DC Inverter Mini VRF

Indoor units lineup

Control system

HRV

Branch Pipe

V4 Plus K Series

Capacity Range	HP	8	10	12	14	16	18
	kW	25.2	28.0	33.5	40.0	45.0	50.0
Appearance							

Full DC Inverter Mini VRF

Capacity Range	HP	2.5	3	3.2	4	5	6.5
	kW	8	10.5	12.3	14	16	18
Appearance							

Contents

- ▶05 V4 Plus K Series
- ▶19 Full DC Inverter Mini VRF
- ▶29 Indoor Units Lineup
- ▶57 Control System
- ▶83 HRV
- ▶86 Branch Pipe

V4 Plus K Series

Full DC Inverter Mini VRF

Indoor units lineup

Control system

HRV

Branch Pipe

V4 Plus K Series

Developed to facilitate more flexible system design for big-sized and high-rise buildings
 V4 Plus K Series VRF product, which is designed to optimize the system and better satisfying the market.
 Offering a higher capacity of up to 72HP by combining maximum four outdoor units, in 2HP as an increment.

V4 Plus K Series



Lineup

Model

Capacity Range	HP	8	10	12	14	16	18
	kW	25.2	28.0	33.5	40.0	45.0	50.0
Appearance							

V4 Plus K Series

Combination Table

Model	N' of Outdoor Units	N' of Compressors	Outdoor Unit Combination						Maximum N' of Connectable Indoor Units	Capacity	
			8HP	10HP	12HP	14HP	16HP	18HP		Cooling	Heating
MDV-252(8)W/D1RN1(C)	1	1	1						13	25.2	27
MDV-280(10)W/D1RN1(C)	1	1		1					16	28	31.5
MDV-335(12)W/D1RN1(C)	1	2			1				20	33.5	37.5
MDV-400(14)W/D1RN1(C)	1	2				1			23	40	45
MDV-450(16)W/D1RN1(C)	1	2					1		26	45	50
MDV-500(18)W/D1RN1(C)	1	2						1	29	50	56
MDV-560(20)W/D1RN1(C)	2	2		2					33	56	63
MDV-615(22)W/D1RN1(C)	2	3		1	1				36	61.5	69
MDV-680(24)W/D1RN1(C)	2	3		1		1			39	68	76.5
MDV-730(26)W/D1RN1(C)	2	3		1			1		43	73	81.5
MDV-780(28)W/D1RN1(C)	2	3		1				1	46	78	87.5
MDV-850(30)W/D1RN1(C)	2	4				1	1		50	85	95
MDV-900(32)W/D1RN1(C)	2	4				1		1	53	90	101
MDV-950(34)W/D1RN1(C)	2	4					1	1	56	95	106
MDV-1000(36)W/D1RN1(C)	2	4						2	59	100	112
MDV-1060(38)W/D1RN1(C)	3	4		2				1	63	106	119
MDV-1130(40)W/D1RN1(C)	3	5		1		1	1		64	113	126.5
MDV-1180(42)W/D1RN1(C)	3	5		1			2		64	118	131.5
MDV-1230(44)W/D1RN1(C)	3	5		1			1	1	64	123	137.5
MDV-1280(46)W/D1RN1(C)	3	5		1				2	64	128	143.5
MDV-1350(48)W/D1RN1(C)	3	6				1	1	1	64	135	151
MDV-1400(50)W/D1RN1(C)	3	6				1		2	64	140	157
MDV-1450(52)W/D1RN1(C)	3	6					1	2	64	145	162
MDV-1500(54)W/D1RN1(C)	3	6						3	64	150	168
MDV-1560(56)W/D1RN1(C)	4	6		2				2	64	156	175
MDV-1630(58)W/D1RN1(C)	4	7		1		1	1	1	64	163	182.5
MDV-1680(60)W/D1RN1(C)	4	7		1		1		2	64	168	188.5
MDV-1730(62)W/D1RN1(C)	4	7		1			1	2	64	173	193.5
MDV-1780(64)W/D1RN1(C)	4	7		1				3	64	178	199.5
MDV-1850(66)W/D1RN1(C)	4	8				1	1	2	64	185	207
MDV-1900(68)W/D1RN1(C)	4	8				1		3	64	190	213
MDV-1950(70)W/D1RN1(C)	4	8					1	3	64	195	218
MDV-2000(72)W/D1RN1(C)	4	8						4	64	200	224

Notes:
 Capacities are based on the following conditions:
 Cooling: Indoor temperature 27°C (80.6°F) DB/19°C (66.2°F) WB; Outdoor temperature 35°C (95°F) DB
 Heating: Indoor temperature 20°C (68°F) DB/15°C (59°F) WB; Outdoor temperature 7°C (44.6°F) DB
 Piping length: Interconnecting piping length 7.5m, level difference of zero.
 The above models combination are factory-recommended models.

Features

Wide Application Range

Large capacity for big sized building


The outdoor units capacity range from 8HP up to 72HP in 2HP increment. Maximum 64 indoor units with capacity up to 130% of total outdoor units can be connected as one refrigeration system.

V4 Plus K Series




More connectable indoor units

The high number of connectable units is suitable for large buildings and projects.

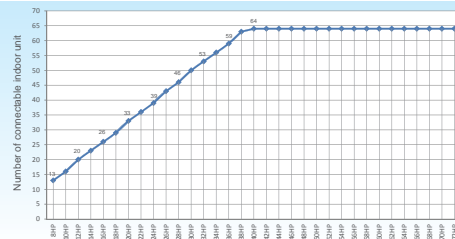


Wide operation range

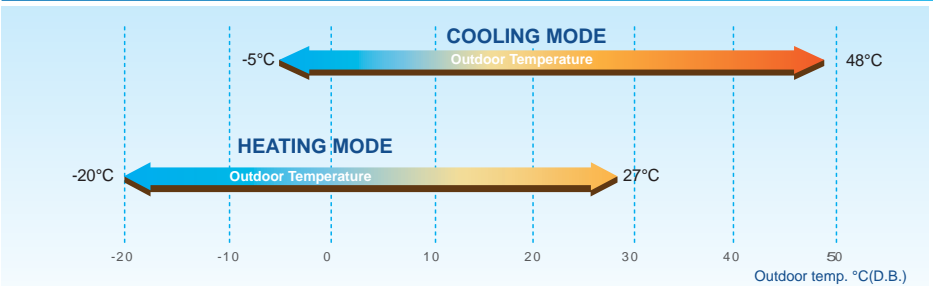

The V4 Plus K Series system operates stably at extreme temperatures ranging from minus 20°C to 48°C.

Long piping length

The solution supports an incredible piping length of 1,000m and level difference of 110m, making it perfect for large projects.

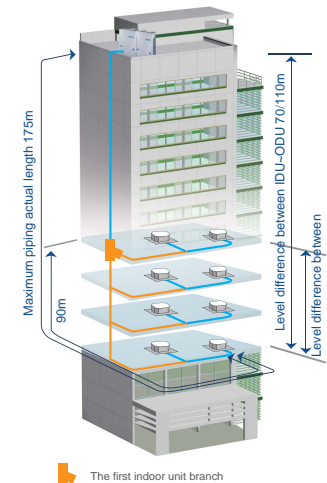

Item	Permitted value		
Piping length	Total pipe length*(Actual)	1000m	
	Maximum piping(L)	Actual length	175m
		Equivalent length	200m
Level difference	Equivalent piping length from the farthest IDU to the first indoor branch joint		40m/90m*
	Level difference between IDU-ODU	Outdoor unit up	70m
		Outdoor unit down	110m
	Level difference between IDU-IDU		30m


*Total pipe length is equal to two times pipe length plus pipe length.
*When the farthest pipe length is more than 40m. It needs to meet the specific condition according to the installation part of the technical manual.

Extra high static pressure – Max. 60Pa and air volume increased by 10%

The high static pressure propeller and optimized fan guard can adapt to various installation environments.

Midea now offers up to 60Pa* external static pressure units for customized applications (60Pa is available for the 12HP model, 40Pa is available for other models).

A standard 0-20Pa function is equipped by default.



Higher Reliability

Cycle duty operation

In one combination, any outdoor unit can run as the master outdoor unit to equalize the service of all units.



Backup operation


In a multiple system, when the master unit failed, any single unit can be set as the master unit, then the remaining units can keep on working.



High efficiency oil balance and oil return technology

5 stage oil control technology ensures every outdoor unit & compressor's oil always keep in the safe level, completely solve the compressor oil lack problem.

- 1st stage: compressor internal oil separate
- 2nd stage: high efficiency oil separator (separation efficiency up to 99%)
- 3rd stage: oil balance technology between compressors
- 4th stage: oil balance technology between modules
- 5th stage: intelligent system oil return program

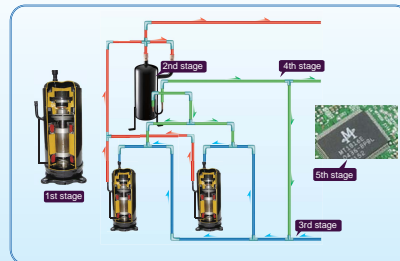

High Efficiency

V4 Plus K Series with high efficiency DC compressors, DC motors and high efficient heat exchanger. The cooling EER up to 4.29 and the heating COP up to 4.39 in the 8HP category.

Enhanced rated heat capacity


EER



COP





High performance heat exchanger

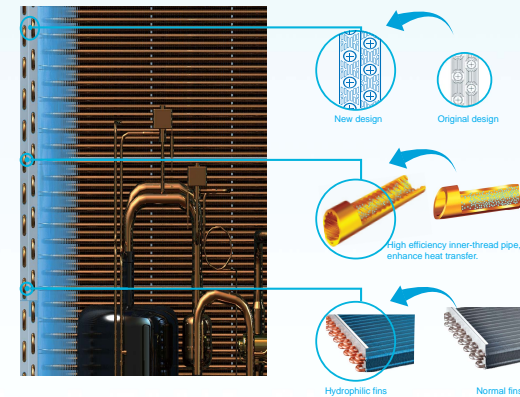

The new designed window fins enlarge the heat-exchanging area, decrease the air resistance, save more power and enhance heat exchange performance.

Hydrophilic fins and inner-threaded copper pipes optimize heat exchange efficiency.

12°C sub cooling

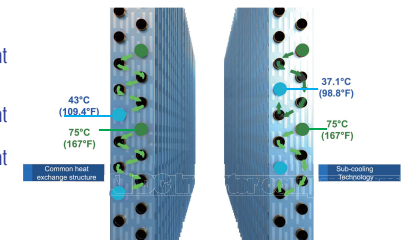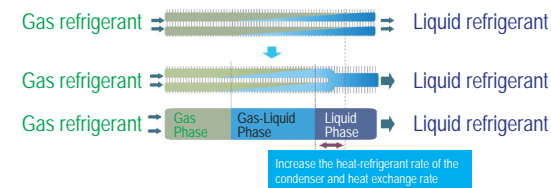


Innovative designed outdoor unit high efficiency heat exchanger, one time can reach up to 12°C subcooling degree, reduces the system resistance and improves reliability. When the outdoor temperature is 35°C, the refrigerant can be cooled to 37.1°C, thus achieving high efficiency heat exchange with only 2.1°C temperature difference.

Enhanced Comfort


Intelligent soft start technology

DC inverter compressor soft start function reduces strike to the electric network. This kind of high-performance and low sound scroll compressor operates at a faster rate when starting, reducing start-up time. It also helps the unit to quickly adjust the room temperature to the set level.



Quick warm-up & cool-down design


Utilizing the scroll compressor benefits, V4 Plus K Series system can reach full load quickly and shorten warm-up or cool-down time for an immediately.

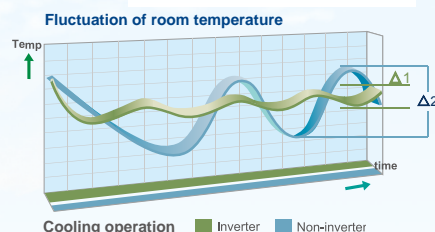

Night silent operation mode

Midea's night silent mode feature which is easily set on the PCB board allows the unit to be set to varies time options during Non Peak and Peak operation time optimizing the units noise output. Extra silent operation mode can reduce sound level further, minimum 46.8dB (A). Night silent operation will be activated X hours after the peak temperature during daytime, and it will go back to normal operation after Y hours.


- Model 1→X: 6 hours, Y: 10 hours
- Model 2→X: 8 hours, Y: 10 hours
- Model 3→X: 6 hours, Y: 12 hours
- Model 4→X: 8 hours, Y: 8 hours

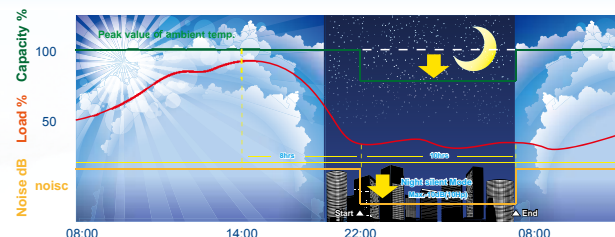

Notes: This function can be activated by setting at site. Temperature(load) curve shown in the graph is just an example.


Intelligent defrosting raises heat capacity

Intelligent defrosting program to judge the defrosting time according to the system real requirement, reduce the heating loss by unnecessary defrosting and make the indoor side more comfortable. Every time defrosting last only 4 min. due to the use of specialized defrosting valve.

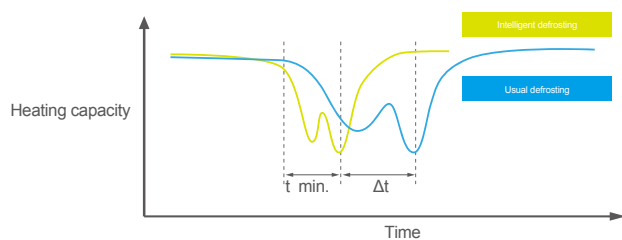


Easier Installation and Service

Compact design for effective use of space

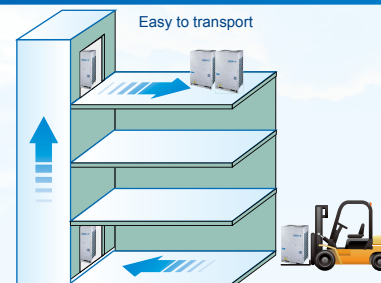


Compact size and light weight design minimizes the installation footprint, reduces the installation floor load, and easier for transportation. For some projects the units can even be transported through the elevator or forklift, lessen access problem at the jobsite.

Easy maintenance



Newly designed rotating control box is so excellent that it can rotate in a wide angle. It is convenient for inspection and maintenance of the pipeline system and greatly reduces the time of dismount the electric control box.

* Rotating Control box is available for 18HP model which with G-shape Condenser.



Reserved checking window on electric control box for convenient spot checking and status enquiry.




Self-diagnosis function helps service engineers locate faults quickly and easily.

Compressor is located near the door, which simplifies checks and enables valve or compressor parts to be replaced easily.

Various locking modes


Various locking modes enhance convenience for users.

In VIP priority or vote priority mode, the address of the VIP unit should be set as 63. If there is no named 63 unit, it will respond to vote priority.

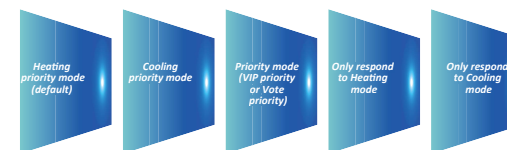

Simple signal line connection

Centralized controller (CCM03 or CCM30) can be connected from indoor side or outdoor side (XYE terminals) at will. Only one group of communication wire of PQE, achieved both of communication for indoor & outdoor unit, It's more convenient for communication wiring.

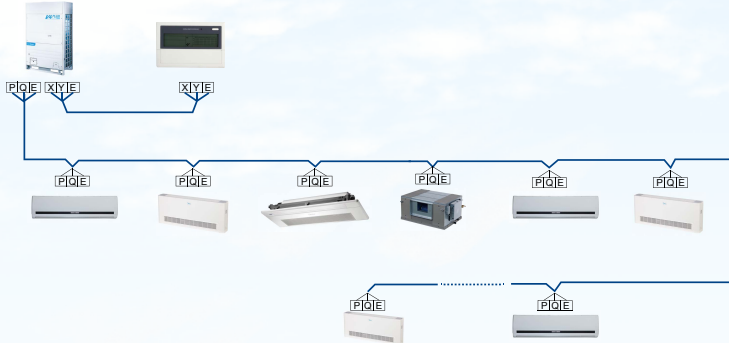

Auto addressing


Outdoor unit can distribute address for each indoor unit automatically.

Wireless and wired controllers can enquire and modify each indoor unit's address.



Integrated solution for control and management

Intelligent Manager of Midea, designed specifically to control VRF systems, is based around a centralized format and dedicated to the complete control and monitoring of all the system's functions. It can be used as a flexible multi-purpose system and applied to a variety of needs, according to the scale, purpose and control method of each building.

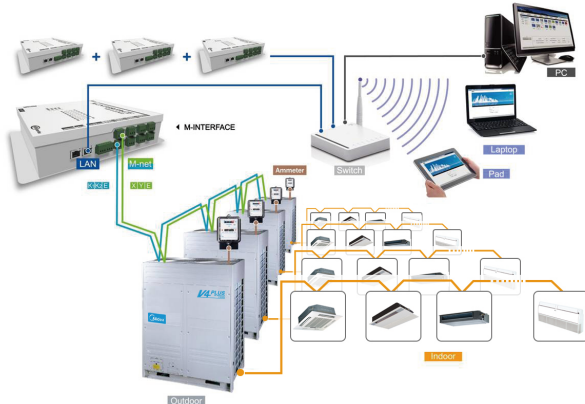


Technologies

High efficiency DC inverter compressor

V4 Plus K Series achieves the industry's top class energy efficiency of cooling and heating by utilizing the brushless reluctance DC compressor control, DC fan motor, and improved performance heat exchanger. High efficiency DC inverter compressor reduces power consumption by 25%.




Powerful magnets provide high torque and efficiency and achieve 70% reduction in volume.

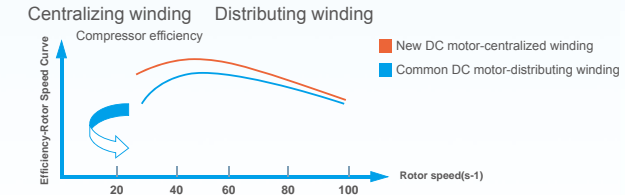


Smooth 180° sine wave DC inverter

Smooth the rotation of the compressor motor, improve the compressor operation efficiency sharply. Effectively control the harmonic current and electromagnetic noise, and fully pass the international EMC test.

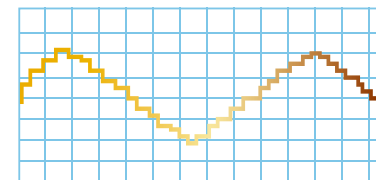

Common Sawtooth Wave

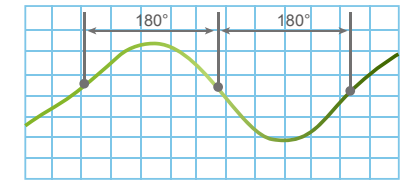

180° Sine Wave DC Inverter

Fan grille

Optimized fan blade shape with new air outlet grille enhanced air flow volume which greatly improves fan performance and decreases noise. Also, a higher external static pressure has been achieved optionally from 20Pa to 40Pa.



(60Pa is available for 12HP)


New profile fan blade

A new blade with sharp edges and a slight curve increases the airflow rate and lowers vibration and airflow resistance.




DC fan motor

According to the running load and system pressure, the system controls the speed of DC fan to achieve the min. energy consumption and best performance.




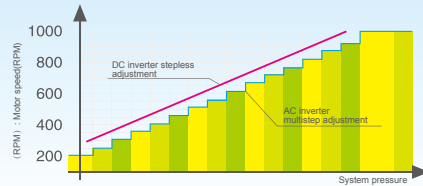


Multi-EXV control technology

Multi-EXV Control Technology in one system, each EXV part achieves 480 pulse to adjust flow precisely. Ensure the temperature-controlling precisely and steadily to give a comfortable environment.

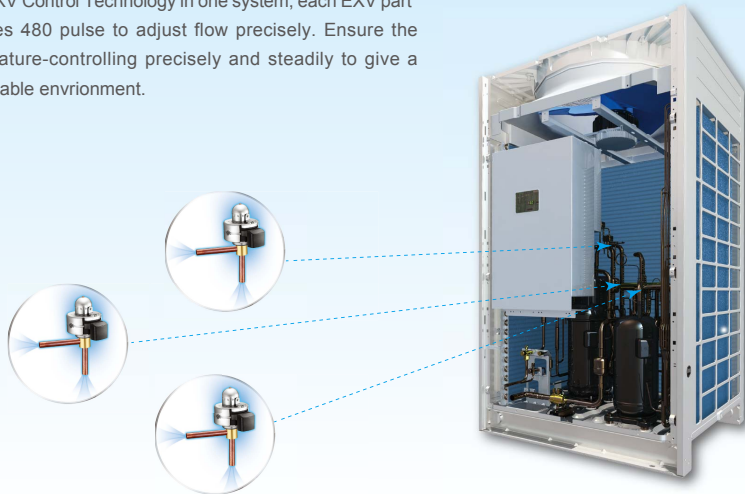

Dimensions

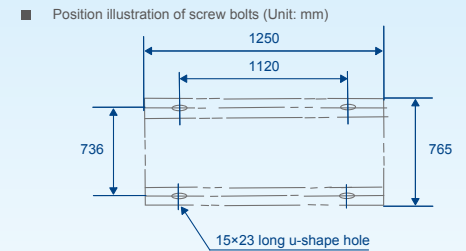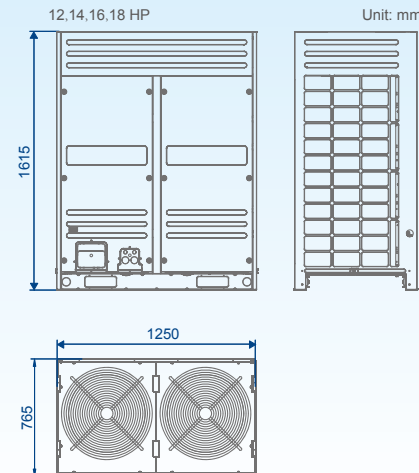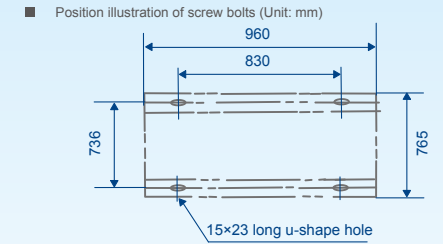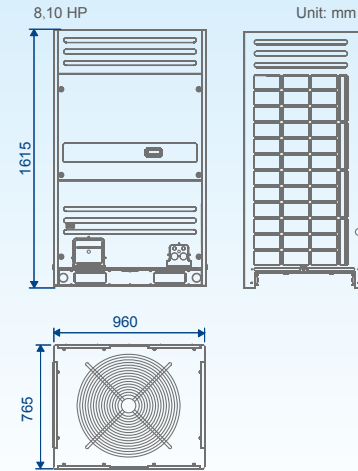

Outdoor Unit

■ Specifications

V4 Plus K Series

MDV-252(8)W/DRN1(C)

MDV-280(10)W/DRN1(C)

MDV-335(12)W/DRN1(C)



Model			MDV-252(8)W/DRN1(C)	MDV-280(10)W/DRN1(C)	MDV-335(12)W/DRN1(C)
Power supply		V/Ph/Hz	380-415/3/50		
Cooling	Capacity	kW	25.2	28.0	33.5
		RT	7.2	8.0	9.5
	Power input	kW	5.88	7.20	9.05
	EER	kW/kW	4.29	3.89	3.70
Heating	Capacity	kW	27.0	31.5	37.5
		RT	7.7	9.0	10.7
	Power input	kW	6.15	7.61	8.99
	COP	kW/kW	4.39	4.14	4.17
Connectable indoor unit	Total capacity	%	50-130	50-130	50-130
	Max. quantity		13	16	20
Sound pressure level		dB(A)	57	57	59
Pipe connections	Liquid pipe	mm	Φ9.53	Φ9.53	Φ12.7
	Gas pipe	mm	Φ22.2	22.2	Φ25.4
	Oil balance pipe	mm	Φ6	Φ6	Φ6
Fan motor	Type		Axial propeller	Axial propeller	Axial propeller
	Quantity		1	1	1+1
	Air flow rate	m ³ /h	11,500	11,500	15,100
	Motor output	W	750	750	560+380
	ESP	Pa	0-20(default)	0-20(default)	0-20(default)
		Pa	20-40(customized)	20-40(customized)	20-60(customized)
DC inverter compressor	Quantity		1	1	1
	Capacity	kW	31.59	31.59	11.8
	Crankcase heater	W	27.6×2	27.6×2	27.6×2
	Oil type		FVC68D	FVC68D	FVC68D
	Oil charge	ml	500	500	500
Fixed scroll compressor	Quantity		-	-	1
	Capacity	kW	-	-	17.1
	Crankcase heater	W	-	-	27.6
	Oil type		-	-	FVC68D
	Oil charge	ml	-	-	500
Refrigerant	Type		R410A	R410A	R410A
	Factory charging		9	9	11
Design pressure (High/Low)		MPa	4.4/2.6	4.4/2.6	4.4/2.6
Net dimension (W×H×D)		mm	960×1615×765	960×1615×765	1250×1615×765
Packing size (W×H×D)		mm	1025×1790×830	1025×1790×830	1305×1790×820
Net weight		kg	198	198	268
Gross weight		kg	213	213	288
Operating temperature range	Cooling	°C	-5-48		
	Heating	°C	-20-27		

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB.

Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter is based on the condition that the total equivalent liquid length is less than 90m. When the total equivalent liquid length is more than 90m,

please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

Outdoor Unit

■ Specifications

V4 Plus K Series

MDV-400(14)W/DRN1(C)

MDV-450(16)W/DRN1(C)

MDV-500(18)W/DRN1(C)



Model			MDV-400(14)W/DRN1(C)	MDV-450(16)W/DRN1(C)	MDV-500(18)W/DRN1(C)
Power supply		V/Ph/Hz	380-415/3/50		
Cooling	Capacity	kW	40.0	45.0	50.0
		RT	11.4	12.8	14.2
	Power input	kW	12.31	14.02	15.20
	EER	kW/kW	3.25	3.21	3.29
Heating	Capacity	kW	45.0	50.0	56.0
		RT	12.8	14.2	15.9
	Power input	kW	11.19	12.79	14.25
	COP	kW/kW	4.02	3.91	3.93
Connectable indoor unit	Total capacity	%	50-130	50-130	50-130
	Max. quantity		23	26	29
Sound pressure level		dB(A)	60	60	61
Pipe connections	Liquid pipe	mm	Φ15.9	Φ15.9	Φ19.1
	Gas pipe	mm	Φ31.8	Φ31.8	Φ31.8
	Oil balance pipe	mm	Φ6	Φ6	Φ6
Fan motor	Type		Axial propeller	Axial propeller	Axial propeller
	Quantity		1+1	1+1	1+1
	Air flow rate	m ³ /h	15,100	15,100	15,200
	Motor output	W	560+380	560+380	560+380
	ESP	Pa	0-20(default)	0-20(default)	0-20(default)
		Pa	20-40(customized)	20-40(customized)	20-40(customized)
DC inverter compressor	Quantity		1	1	1
	Capacity	kW	31.59	31.59	11.8
	Crankcase heater	W	27.6×2	27.6×2	27.6×2
	Oil type		FVC68D	FVC68D	FVC68D
	Oil charge	ml	500	500	500
Fixed scroll compressor	Quantity		1	1	1
	Capacity	kW	13.39	13.39	20.9
	Crankcase heater	W	27.6	27.6	27.6
	Oil type		FVC68D	FVC68D	FVC68D
	Oil charge	ml	500	500	500
Refrigerant charge	Type		R410A	R410A	R410A
	Original charge	kg	13	13	16
Design pressure (High/Low)		MPa	4.4/2.6	4.4/2.6	4.4/2.6
Net dimension (W×H×D)		mm	1250×1615×765	1250×1615×765	1250×1615×765
Packing size (W×H×D)		mm	1305×1790×820	1305×1790×820	1305×1790×820
Net weight		kg	280	280	300
Gross weight		kg	300	300	320
Operating temperature range	Cooling	°C	-5-48		
	Heating	°C	-20-27		

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB.

Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter is based on the condition that the total equivalent liquid length is less than 90m. When the total equivalent liquid length is more than 90m,

please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

Full DC Inverter Mini VRF

Full DC Inverter Mini VRF with DC inverter compressor and DC fan motor delivers a highly efficient solution for small commercial buildings. Five to seven rooms require only one outdoor unit, and individual control is enabled in each room.



Full DC Inverter Mini VRF

Full DC Inverter Mini VRF

NEW
Fashion Design

R-410A

DC Inverter

Features

Wide Application Range

Wide range of outdoor units

The outdoor units' capacity range from 8kW to 18kW which is ideal for small offices, villas, apartment and shops, making it perfect for commercial and residential application.

8kW, 10.5kW




12kW, 14kW, 16kW, 18kW



Flexible indoor units connection


Mini VRF with intelligent control gives you independent zoning control with maximum flexibility. A single outdoor unit supports up to nine indoor units, freeing up considerable space outside. Use your backyard more wisely with much more space available created by less number of outdoor units.

- Max. 9 indoor units for a 18kW outdoor unit installation
- Max. 7 indoor units for a 16kW outdoor unit installation
- Max. 6 indoor units for a 14kW outdoor unit installation
- Max. 6 indoor units for a 12kW outdoor unit installation
- Max. 5 indoor units for a 10.5kW outdoor unit installation
- Max. 4 indoor units for a 8kW outdoor unit installation

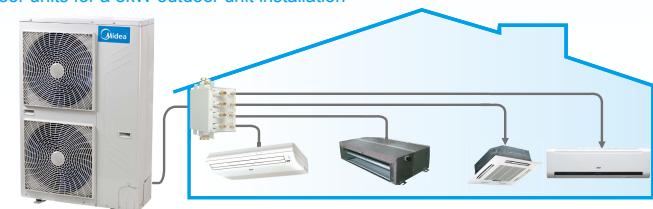


Wide operation temperature range

Mini VRF system operates stably at extreme temperature range from minus 15°C to 48°C.

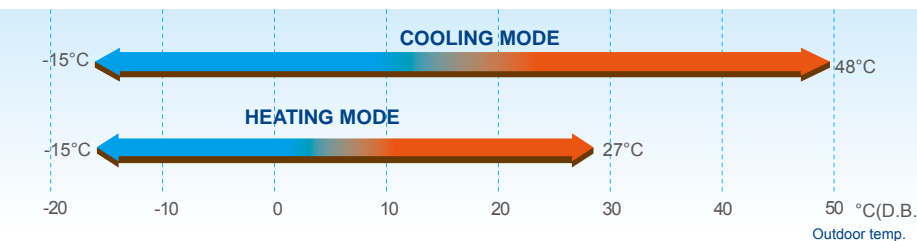

Flexible piping design

The Mini VRF provides a total piping length possibility of 100m, a maximum height difference between outdoor and indoor units of 30m. The height difference between indoors unit can be up to 8m. These generous allowances facilitate an extensive array of system designs.

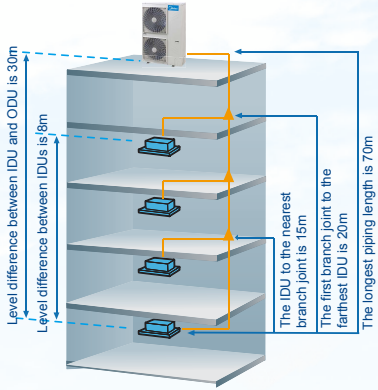


	Permitted value	8/10.5kW	12/14/16/18kW	
Piping length	Total piping length (Actual)	100m	100m	
	Longest piping (L)	Actual length	45m	60m
		Equivalent length	50m	70m
Level difference	Equivalent piping length (from the farthest IDU to the first indoor branch joint)	20m	20m	
		Level difference between IDU-ODU	Outdoor unit up	30m
	Outdoor unit down	20m	20m	
	Level difference between IDU-IDU	8m	8m	

1 Total pipe length is equal to all the liquid pipe or all the gas pipe length.
2 When the total equivalent pipe length of liquid side plus gas side is more than 90m, it needs to meet the specific conditions according to the installation part of the technical manual.

Easier Installation and Service


Easy installation

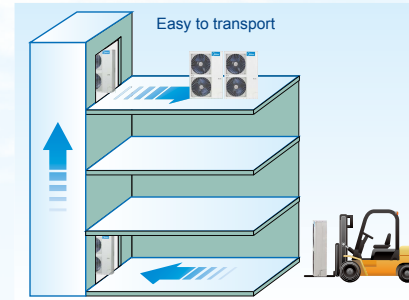

Easy installation: No special area is required for outdoor units.
Easy transportation: All outdoor units can be transported by elevator, which greatly simplifies installation and reduces time and labor.
The Mini VRF system's indoor and outdoor units are almost as easy to install as residential air conditioning systems, making them ideal for small offices and shops.

Space saving design

The Mini VRF units are slimmer and more compact, resulting in significant savings in installation space. In some large residential and light commercial areas, such as villas, restaurants, usually it need more than one indoor unit, which in turn requires multiple outdoor units. Midea's MINI VRF system removes this problem, and retains buildings' original aesthetics.

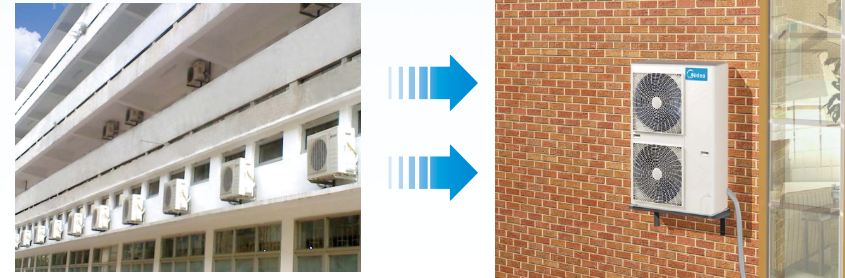



Auto addressing

Addresses of indoor units can be set automatically by outdoor units.
Wireless controller can inquire and modify every indoor units address.






High Efficiency

High COP and EER values

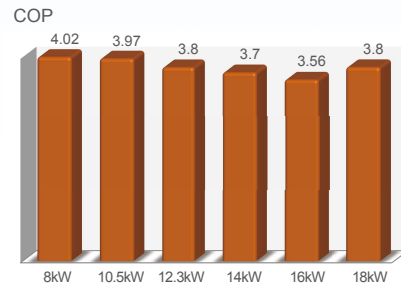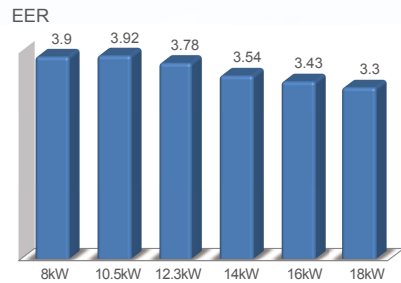

High performance heat exchanger



Reduce air resistance



- The new designed window fins enlarge the heat-exchanging area, decrease the air resistance, save more power and enhance heat exchange performance.
- Hydrophilic film fins and inner-threaded copper pipes optimize heat exchange efficiency.
- The specially coated blue fins enhance durability and protect against corrosion from air, water and other corrosive agents, assures a longer coil service life.

More convenience in installation

A four-direction space is available for connecting pipes and wiring in various installation sites.

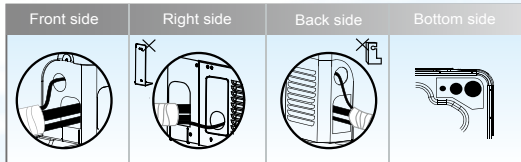

More convenient piping connector - branch box

Easier and safer installation thanks to a branch box that simplifies piping work and the adoption of screw connection.

Both left and right pipe flare connectin from outdoor unit to branch box is reserved, which greatly simplifies field installation.

Two sets of pipe size converter are packed with branch box to transfer the pipe size from $\Phi 6.35\text{mm}$ to 9.53mm and from $\Phi 12.7\text{mm}$ to $\Phi 15.9\text{mm}$.

Low noise

The branch pipe is linear expansion design regulates the flow of refrigerant and reduces the noise. By locating the branch box in the ceiling or outside ,noise generated by the branch box can be kept clear of living spaces, thus makes noise level to a minimum.




Brazing-free quick installation

All the piping leading to and from the branch box is connected using screw joints, which can be installed quickly and easily.

Indoor installation

The branch box can be installed in the ceiling rather than outside. Removing the side and bottom covers provides easy access for maintaining inner components such as circuit boards.


New piping connection design

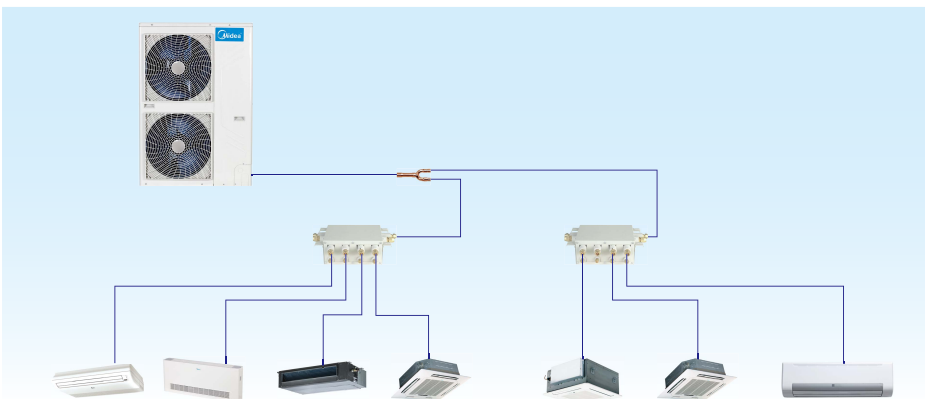

Advanced Technologies


Full DC inverter technology

At the heart of our system is a highly intelligent inverter driven compressor. This advanced technology enables the output of the outdoor unit to be modulated by the cooling or heating demands of the zone that it controls. This advanced system ensures precise temperature regulation and highly efficient energy usage, making a significant contribution to the limiting the impact on the environment.

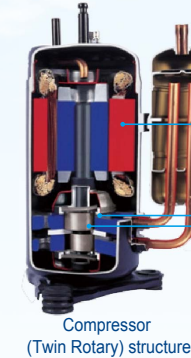



- Highly Efficient DC Motor:**
 - Creative motor core design
 - High density neodymium magnet
 - Concentrated type stator
 - Wider operating frequency range
- Better balance and Extremely Low Vibration:**
 - Twin eccentric cams
 - 2 balance weights
- Highly Stable Moving Parts:**
 - Optimal material matching rollers and vanes
 - Optimize compressor drive technology
 - Highly robust bearings
 - Compact structure

High efficiency DC fan motor saved power up to 50%.

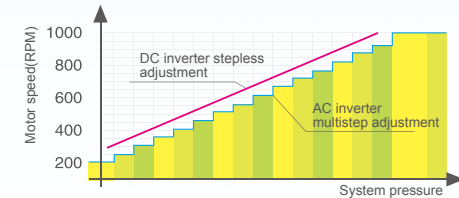

Noise reducing design

Optimally designed fan shape and air discharge grille increases air volume and reduces running noise.

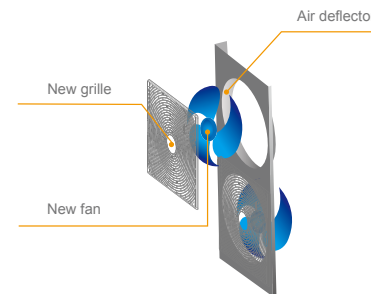

Newly Designed Fan Guard



Powerful Large Propeller

Outdoor Unit

Specifications

220-240V~50Hz

MDV-V80W/DN1

MDV-V105W/DN1



Model			MDV-V80W/DN1	MDV-V105W/DN1
Power supply		V/Ph/Hz	220-240/1/50Hz	220-240/1/50Hz
Cooling	Capacity	kW	8	10.5
		RT	2.3	2.9
	Input	kW	2.05	2.68
	EER	kW/kW	3.90	3.92
Heating	Capacity	kW	9	11.5
		RT	2.6	3.2
	Input	kW	2.24	2.9
	COP	kW/kW	4.02	3.97
Connectable indoor unit	Total capacity	%	45-130	45-130
	Max. quantity		4	5
Sound pressure level		dB(A)	56	57
Pipe connections	Liquid side	mm	φ9.53	φ9.53
	Gas side	mm	φ15.9	φ15.9
Fan motor	Type		DC motor	DC motor
	Quantity		1	1
	Air flow rate	m ³ /h	5500	5500
	Motor output	W	170	170
Rotary compressor	Quantity		1	1
	Capacity	kW	7	7
	Crankcase heater	W	25	25
	Oil type		FV50S	FV50S
Oil charge	ml	670+200	670+200	
Refrigerant	Type		R410A	R410A
	Factory charging	kg	2.8	2.95
Design pressure (High/Low)		MPa	4.4/2.6	4.4/2.6
Net dimension (W×H×D)		mm	1075×966×396	1075×966×396
Packing size (W×H×D)		mm	1120×1100×435	1120×1100×435
Net weight		kg	62	74
Gross weight		kg	67	81
Operating temperature range	Cooling	°C	-15-48	
	Heating	°C	-15-27	

Note:

- The cooling conditions: indoor temp.: 27°CDB(80.6°F), 19°CWB(60°F) outdoor temp.: 35°CDB(95°F) equivalent pipe length:5m drop length: 0m.
- The heating conditions: indoor temp.: 20°CDB(68°F), 15°CWB(44.6°F) outdoor temp.: 7°CDB(42.8°F) equivalent pipe length: 5m droplength: 0m.
- Sound level: Anechoic chamber conversion value,measured at a point 1m(3.28ft) in front of the unit at a height of 1m(3.28ft). During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- The above data may be changedwithout notice forfuture improvement on quality and performance.

Outdoor Unit

Specifications

220-240V~50Hz

MDV-V120W/DN1

MDV-V140W/DN1

MDV-V160W/DN1(B)

380-415V-3N~50Hz

MDV-V120W/DRN1

MDV-V140W/DRN1

MDV-V160W/DRN1

MDV-V180W/DRN1








Model			MDV-V120W/DN1	MDV-V140W/DN1	MDV-V160W/DN1(B)	-
Power supply		V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	-
Model			MDV-V120W/DRN1	MDV-V140W/DRN1	MDV-V160W/DRN1	MDV-V180W/DRN1
Power supply		V/Ph/Hz	380-415/3/50	380-415/3/50	380-415/3/50	380-415/3/50
Cooling	Capacity	kW	12.3	14	15.5	17.5
		RT	3.4	3.9	4.3	5.0
	Input	kW	3.25	3.95	4.52	5.3
	EER	kW/kW	3.78	3.54	3.43	3.3
Heating	Capacity	kW	13.2	15.4	17	19
		RT	3.70	4.30	4.80	5.4
	Input	kW	3.47	4.16	4.77	5
	COP	kW/kW	3.80	3.70	3.56	3.80
Connectable indoor unit	Total capacity	%	45-130	45%~130%	45%~130%	45%~130%
	Max. quantity		6	6	7	9
Sound pressure level		dB(A)	57	57	57	59
Pipe connections	Liquid side	mm	φ9.53	φ9.53	φ9.53	φ9.53
	Gas side	mm	φ15.9	φ15.9	φ19.1	φ19.1
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		2	2	2	2
	Air flow rate	m ³ /h	6000	6000	6000	6800
	Output	W	85×2	85×2	85×2	85×2
Rotary compressor	Quantity		1	1	1	1
	Capacity	kW	10	10	14	14
	Crankcase heater	W	25	25	25	25
	Oil type		FV50S	FV50S	FV50S	FV50S
Oil charge	ml	870+630	870+630	1400+250	1400+250	
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charging	kg	3.3	3.9	3.9	4.5
Design pressure (High/Low)		MPa	4.4/2.6	4.4/2.6	4.4/2.6	4.4/2.6
Net dimension (W×H×D)		mm	900×1327×400	900×1327×400	900×1327×400	900×1327×400
Packing size (W×H×D)		mm	1030×1456×435	1030×1456×435	1030×1456×435	1030×1456×435
Net weight(220V/380V)		kg	95/95	95/95	100/102	-/107
Gross weight(220V/380V)		kg	106/106	106/106	111/113	-/118
Operating temperature range	Cooling	°C	-15-48			
	Heating	°C	-15-27			

Note:

- The cooling conditions: indoor temp.: 27°CDB(80.6°F), 19°CWB(60°F) outdoor temp.: 35°CDB(95°F) equivalent pipe length:5m drop length: 0m.
- The heating conditions: indoor temp.: 20°CDB(68°F), 15°CWB(44.6°F) outdoor temp.: 7°CDB(42.8°F) equivalent pipe length: 5m droplength: 0m.
- Sound level: Anechoic chamber conversion value,measured at a point 1m(3.28ft) in front of the unit at a height of 1.2m(3.94ft). During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- The above data may be changedwithout notice forfuture improvement on quality and performance.


Dimension

Unit Dimensions (Unit: mm)

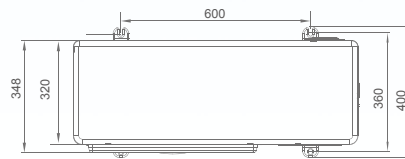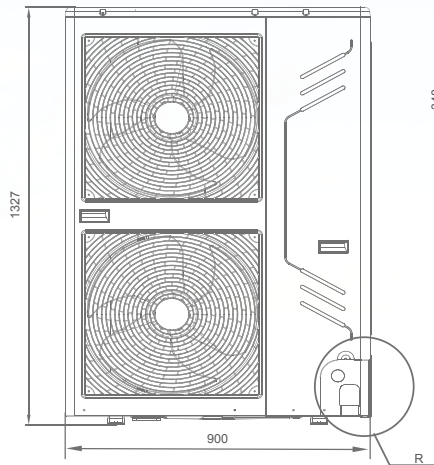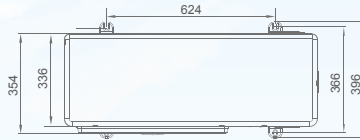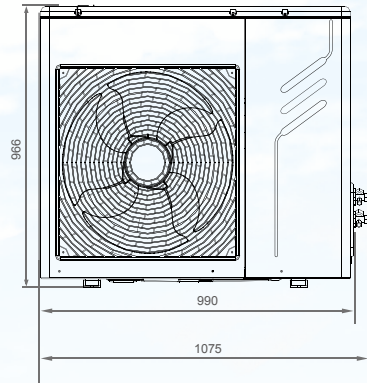


R amplification



Unit installation

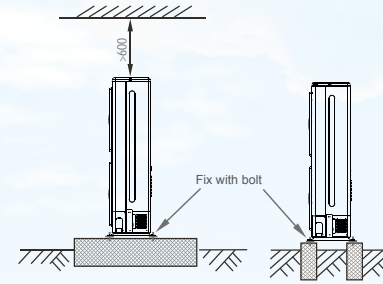

Single Unit installation

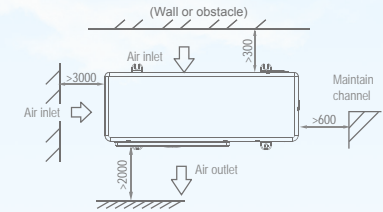

Parallel installation

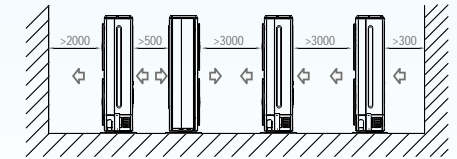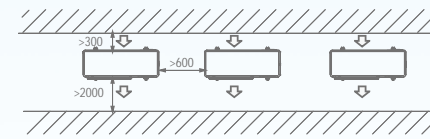

Indoor Units Lineup →



Indoor Units Lineup

- One-way Cassette
- Two-way Cassette
- Compact Four-way Cassette
- Four-way Cassette
- Concealed Duct Unit (A5 Type)
- High Static Pressure Duct
- Ceiling & Floor
- Wall mounted
- Floor Standing
- Console
- Fresh Air Processing Unit

Type		Model (capacity *100)	15	18	22	28	36	45	56	71	80	90	100	112	125	140	160	200	250	280	400	450	560	
			One-way Cassette	MDV-D XX Q1/N1-D			●	●	●	●														
	MDV-D XX Q1/N1-C							●	●															
Two-way Cassette	MDV-D XX Q2/N1				●	●	●	●	●	●														
Compact Four-way Cassette	MDV-D XX Q4/N1-A3		●		●	●	●	●																
Four-way Cassette	MDV-D XX Q4/N1-D					●	●	●	●	●	●	●	●	●		●								
Concealed Duct Unit(A5 Type)	MDV-D XX T2/N1-BA5										●	●		●		●								
	MDV-D XX T2/N1-DA5		●		●	●	●	●	●	●														
High Static Pressure Duct	MDV-D XX T1/N1-B									●	●	●		●										
																	●	●						
																			●	●	●			
																						●	●	●
Ceiling & Floor	MDV-D XX DL/N1-C						●	●	●	●	●	●		●		●	●							
Wall mounted	MDV-D XX G/N1-S MDV-D XX G/DN1-S		●		●	●	●	●	●															
					●	●	●	●	●	●														
	MDV-D XX G-R3/N1Y MDV-D XX G/N1Y-11D5										●	●	●											
					●	●	●	●	●	●														
Floor Standing	MDV-D XX Z/N1-F3B MDV-D XX Z/N1-F4(F5)				●	●	●	●	●	●	●													
					●	●	●	●	●	●	●													
Console	MDV-D XX Z/DN1-B				●	●	●	●																
Fresh Air Processing Unit	MDV-D XX T1/N1-FA														●	●								
																			●	●	●			

11 types and more than 100 models are available to meet varied customer requirements, 1.5kW model is only available for V4 plus and MINI VRF system.


One-way Cassette




- Auto Restart
- Fresh Air
- Auto Addressing
- Cleanable Panel
- Follow Me
- Anti-Cold Air Function
- LED Display
- Super High Air Flow
- Built-in Drain Pump

Only 153mm thickness

Compact design, ultra slim body with a minimum thickness of 153mm for model 18-36, especially suitable for narrow ceiling, such as in lobbies and small meeting rooms.

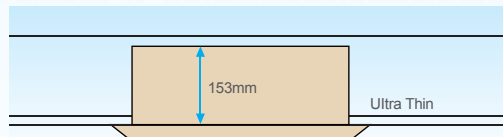


Standard built-in drain pump with 750mm pump head.



Auto swing

Auto swing mechanism guarantees even airflow distribution and a better room temperature balance.

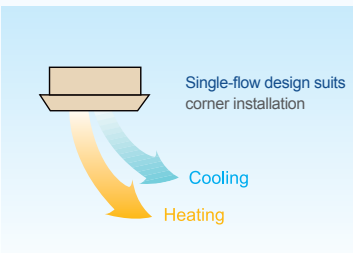


Fresh air, improved air quality

Reserved fresh air intake port for high quality air creates a comfortable and healthy environment.



Special enzyme sterilization and filtering technologies filter bacteria, smog, and pollen. Provide a clean, healthy and natural air supply.

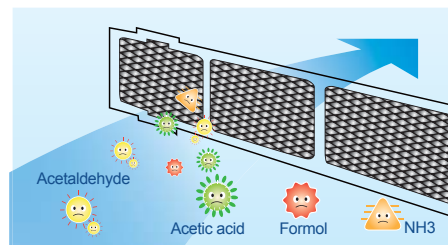

Model		MDV-D18Q1 /N1-D	MDV-D22Q1 /N1-D	MDV-D28Q1 /N1-D	MDV-D36Q1 /N1-D	MDV-D45Q1 /N1-C	MDV-D56Q1 /N1-C
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	1.8	2.2	2.8	3.6	4.5	5.6
	kcal/h	1500	1900	2400	3100	3900	4800
	Btu/h	6100	7500	9600	12300	15400	19100
Heating capacity	kW	2.2	2.6	3.2	4	5	6.3
	kcal/h	1900	2200	2800	3400	4300	5400
	Btu/h	7500	8900	10900	13600	17100	21500
Rated input	Cooling	41	41	41	41	80	85
	Heating	41	41	41	41	80	85
Rated current	Cooling	0.24	0.24	0.25	0.25	0.37	0.39
	Heating	0.24	0.24	0.25	0.25	0.37	0.39
Airflow rate(H/M/L)	m³/h	523/404/275	523/404/275	573/456/315	573/456/315	704/630/503	860/810/702
	CFM	308/238/162	308/238/162	337/268/185	337/268/185	414/370/296	506/476/413
Sound pressure level(H/M/L)	dB(A)	37/34/30	38/34/30	39/37/34	40/38/34	41/39/35	42/40/36
Refrigerant	Type	R410A					
	Control method	EXV					
Indoor Unit	Net dim.(W×H×D)	1054×169×425				1147×200×640	
	Gross dim.(W×H×D)	1155×245×490				1380×265×775	
	NetGross	kg		12.5/16	13/16.5	31.5/37.2	
Panel	Net dim.(W×H×D)	mm		1180×25×465	1180×25×465	1425×10×755	
	Gross dim.(W×H×D)	mm		1232×107×517	1232×107×517	1500×110×870	
	NetGross	kg		3.5/5.2	3.5/5.2	9/12	
Piping connections	L(flare)	mm		Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm		Φ12.7	Φ12.7	Φ12.7	Φ16
	Drain piping	mm		OD Φ25	OD Φ25	OD Φ25	
Standard Controller		Wireless remote controller RM05/BG(T)E-A(E)					

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. Piping: 8m(horizontal)
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. Piping: 8m(horizontal)
- Sound level is measured at 1.4m below the unit.

Two-way Cassette




- Auto Restart
- Auto Addressing
- Follow Me
- LED Display
- Built-in Drain Pump
- Fresh Air
- Cleanable Panel
- Anti-Cold Air Function
- Super High Air Flow

Quiet operation


Optimized airflow duct with low resistance greatly reduces noise, minimum down to 24dB(A).

Stylish design and slim body

Thanks to the stylish appearance and slim body, the unit suits any room's decor and ambience. At only 300mm high, the unit requires only a small suspended ceiling space. Installation has no height limitations, which makes overall design features much more flexible.



Standard built-in drain pump with 750mm pump head (higher pump head can be customized).

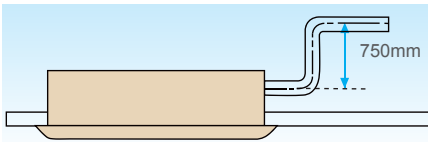

Flat-type suction grille design greatly simplifies maintenance work.

High airflow

High airflow for high ceiling application guarantees comfort in large space. It makes every person in the room get even distribution of airflow and temperature.



Model		MDV-D22Q2/N1	MDV-D28Q2/N1	MDV-D36Q2/N1	MDV-D45Q2/N1	MDV-D56Q2/N1	MDV-D71Q2/N1	
Power supply		1-phase, 220-240V, 50Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
	kcal/h	1,900	2,400	3,100	3,900	4,800	6,100	
	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200	
Heating capacity	kW	2.6	3.2	4.0	5.0	6.3	8.0	
	kcal/h	2,200	2,800	3,400	4,300	5,400	6,900	
	Btu/h	8,900	10,900	13,600	17,100	21,500	27,300	
Power input	Cooling	W	57	57	60	92	108	154
	Heating		57	57	60	92	108	154
Rated current	Cooling	A	0.35	0.45	0.45	0.55	0.55	0.75
	Heating		0.35	0.45	0.45	0.55	0.55	0.75
Airflow rate(H/M/L)	m ³ /h	654/530/410	654/530/410	725/591/458	850/670/550	980/800/670	1,200/1,000/770	
	CFM	385/312/241	385/312/241	427/348/270	500/394/324	577/471/394	706/589/453	
Sound pressure level(H/M/L)	dB(A)	33/29/24	36/32/29	36/32/29	39/35/30	39/35/30	44/40/34	
Refrigerant	Type	R410A						
	Control method	EXV						
Body	Net dim.(W×H×D)	mm	1,172×300×592	1,172×300×592	1,172×300×592	1,172×300×592	1,172×300×592	1,172×300×592
	Gross dim.(W×H×D)		1,355×400×675	1,355×400×675	1,355×400×675	1,355×400×675	1,355×400×675	1,355×400×675
	Net/gross	kg	34/42.5	34/42.5	34/42.5	36.5/45	36.5/45	36.5/45
Panel	Net dim.(W×H×D)	mm	1,430×90×680	1,430×90×680	1,430×90×680	1,430×90×680	1,430×90×680	1,430×90×680
	Gross dim.(W×H×D)		1,525×130×765	1,525×130×765	1,525×130×765	1,525×130×765	1,525×130×765	1,525×130×765
	Net/gross	kg	10.5/15	10.5/15	10.5/15	10.5/15	10.5/15	10.5/15
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)						

Notes:


- Nominal cooling capacities are based on the following conditions: return air temperature : 27°CDB,19°CWB,outdoor temperature.:35°CDB, equivalent ref. Piping: 8m(horizontal)
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB,outdoor temperature.: 7°CDB, 6°CWB, equivalent ref. Piping: 8m(horizontal)
- Sound level is measured at 1.4m below the unit.

Compact Four-way Cassette



- Auto Restart
- Fresh Air
- Auto Addressing
- Cleanable Panel
- Follow Me
- Anti-Cold Air Function
- Built-in Drain Pump
- LED Display
- Super High Air Flow

Compact design, easy installation and maintenance

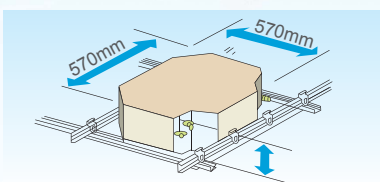


Extremely compact casing suits any room's decor and requires little space for installation on a low ceiling. Due to the compact body and light weight, all models can be installed without a hoist.

Quiet operation, gentle air supply



Streamline plate ensures quiet operation. Advanced 3-D spiral fan design reduces air resistance and operation noise.

Four-way uniform airflow

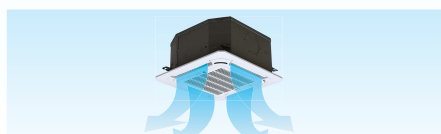


Four air discharge ports provide strong air flow circulation to cool or heat every corner of a room and evenly distribute temperature. High airflow mode can maximize the conditioning effect in rooms that are over 3m high.

360° Airflow outlet



360° air outlet provides strong air flow circulation to cool or heat every corner of a room and evenly distribute temperature.

Lift pump



Drain pump with a 500mm pump head is fitted as standard; maximum 600mm pump head is available.

Model		MDV-D15Q4/N1-A3	MDV-D22Q4/N1-A3	MDV-D28Q4/N1-A3	MDV-D36Q4/N1-A3	MDV-D45Q4/N1-A3	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	
	kcal/h	1300	1900	2400	3100	3900	
	Btu/h	5100	7500	9600	12300	15400	
Heating capacity	kW	1.7	2.4	3.2	4	5	
	kcal/h	1500	2100	2700	3400	4300	
	Btu/h	5800	8200	10900	13600	17100	
Rated input	Cooling	W	36	48	56	56	56
	Heating		36	48	56	56	56
Rated current	Cooling	A	0.22	0.22	0.22	0.25	0.25
	Heating		0.22	0.22	0.22	0.25	0.25
Airflow rate(SH/H/M/L)	m ³ /h	501/435/283/208	522/414/313/238	522/414/313/238	610/521/409/314	610/521/409/314	
	CFM	295/256/167/98	307/244/184/140	307/244/184/140	359/307/241/185	359/307/241/185	
Sound pressure level(H/M/L)	dB(A)	34.9/32.5/22.5	35.8/33.4/23.4	35.8/33.4/23.4	41.5/35.6/28.8	41.5/35.6/28.8	
Refrigerant	Type	R410A					
	Control method	EXV					
Indoor Unit	Net dim.(W×H×D)	mm	570x260x570	570x260x570	570x260x570	570x260x570	570x260x570
	Gross dim.(W×H×D)		675x285x675	675x285x675	675x285x675	675x285x675	675x285x675
	NetGross		kg	16/19.5	16/20	16/20	18/22
Panel	Net dim.(W×H×D)	mm	647x50x647	647x50x647	647x50x647	647x50x647	647x50x647
	Gross dim.(W×H×D)		715x123x715	715x123x715	715x123x715	715x123x715	715x123x715
	NetGross		kg	2.4/4.5	2.4/4.5	2.4/4.5	2.4/4.5
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7
	Drain piping	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard Controller		Wireless remote controller (RM05/BG(T)E-A)					

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. Piping: 8m(horizontal)
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. Piping: 8m(horizontal)
- Sound level is measured at 1.4m below the unit.


Four-way Cassette



- Auto Restart
- Fresh Air
- Auto Addressing
- Cleanable Panel
- Follow Me
- Anti-Cold Air Function
- Built-in Drain Pump
- LED Display
- Super High Air Flow

Quiet operation, gentle air supply

- Streamline plate ensures quiet operation.
- Advanced 3-D spiral fan design reduces air resistance and operation noise.

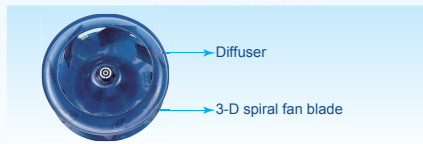

Four-stage fan speed



Easy troubleshooting

By adding digital tube on the display board, Error Codes can be displayed directly for troubleshooting.




360° Airflow outlet



360° air outlet provides strong air flow circulation to cool or heat every corner of a room and evenly distribute temperature.

High lift pump


Drain pump can take condenser water up to 750mm, which simplifies installation of the drain piping system.

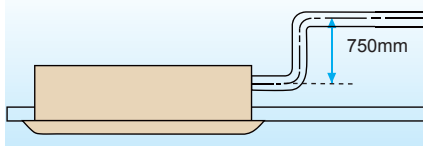

Four-way uniform air flow

Four air discharge ports provide strong air flow circulation to cool or heat every corner of a room and evenly distribute temperature. High airflow mode can maximize the conditioning effect in rooms that are over 3m high.

Reserved multi-function ports

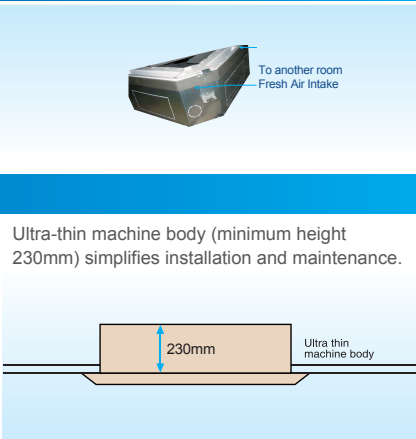


Model		MDV-D28Q4/N1-D	MDV-D36Q4/N1-D	MDV-D45Q4/N1-D	MDV-D56Q4/N1-D	MDV-D71Q4/N1-D	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.1	
	kcal/h	2,400	3,100	3,900	4,800	6,100	
	Btu/h	9,600	12,300	15,400	19,100	24,200	
Heating capacity	kW	3.2	4.0	5.0	6.3	8.0	
	kcal/h	2,800	3,400	4,300	5,400	6,900	
	Btu/h	10,900	13,600	17,100	21,500	27,300	
Power input	Cooling	W	80	80	75	75	82
	Heating	W	80	80	75	75	82
Rated current	Cooling	A	0.4	0.4	0.4	0.4	0.5
	Heating	A	0.4	0.4	0.4	0.4	0.5
Airflow rate(SH/H/M/L)	m³/h	1,187/847/766/640	1,187/847/766/640	1,121/864/755/658	1,121/864/755/658	1,385/1,157/955/749	
	CFM	699/498/450/376	699/498/450/376	660/508/444/387	660/508/444/387	815/680/562/440	
Sound pressure level(H/M/L)	dB(A)	42/38/35	42/38/35	42/38/35	42/38/35	45/42/39	
	Type	R410A					
Refrigerant	Type	R410A					
	Control method	EXV					
Body	Net dim.(W×H×D)	840×230×840	840×230×840	840×230×840	840×230×840	840×230×840	
	Gross dim.(W×H×D)	955×260×955	955×260×955	955×260×955	955×260×955	955×260×955	
	Net/gross	kg	24/28	24/28	26/30	26/30	26/30
Panel	Net dim.(W×H×D)	950×46×950	950×46×950	950×46×950	950×46×950	950×46×950	
	Gross dim.(W×H×D)	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	
	Net/gross	kg	6/9	6/9	6/9	6/9	6/9
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)					

Model		MDV-D80Q4/N1-D	MDV-D90Q4/N1-D	MDV-D100Q4/N1-D	MDV-D112Q4/N1-D	MDV-D140Q4/N1-D	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	8.0	9.0	10.0	11.2	14.0	
	kcal/h	6,900	7,700	8,600	9,600	12,000	
	Btu/h	27,300	30,700	34,100	38,200	47,800	
Heating capacity	kW	9.0	10.0	11.0	12.5	15.0	
	kcal/h	7,700	8,600	9,500	10,800	12,900	
	Btu/h	30,700	34,100	37,500	42,700	51,200	
Power input	Cooling	W	97	160	160	160	170
	Heating	W	97	160	160	160	170
Rated current	Cooling	A	0.5	0.7	0.7	0.7	0.8
	Heating	A	0.5	0.7	0.7	0.7	0.8
Airflow rate(SH/H/M/L)	m³/h	1,431/1,236/973/729	1,758/1,540/1,300/1,120	1,758/1,540/1,300/1,120	1,758/1,540/1,300/1,120	1,843/1,800/1,500/1,280	
	CFM	842/727/572/429	1,035/906/765/659	1,035/906/765/659	1,035/906/765/659	1,085/1,059/883/753	
Sound pressure level(H/M/L)	dB(A)	45/42/39	48/45/43	48/45/43	48/45/43	50/47/44	
	Type	R410A					
Refrigerant	Type	R410A					
	Control method	EXV					
Body	Net dim.(W×H×D)	840×230×840	840×300×840	840×300×840	840×300×840	840×300×840	
	Gross dim.(W×H×D)	955×260×955	955×330×955	955×330×955	955×330×955	955×330×955	
	Net/gross	kg	26/30	32/37	32/37	32/37	32/37
Panel	Net dim.(W×H×D)	950×46×950	950×46×950	950×46×950	950×46×950	950×46×950	
	Gross dim.(W×H×D)	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	1,000×60×1,000	
	Net/gross	kg	6/9	6/9	6/9	6/9	6/9
Piping connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	G(flare)	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)					

Notes:


1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. Piping: 8m(horizontal)
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. Piping: 8m(horizontal)
3. Sound level is measured at 1.4m below the unit.

Concealed Duct Unit (A5 Type)

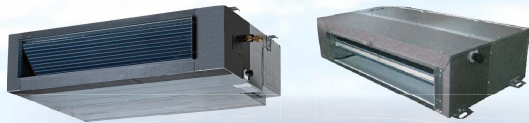

- Auto Restart
- Fresh Air
- Follow Me
- Anti-Cold Air Function
- Built-in Drain Pump
- Wired Controller
- Auto Addressing
- Cleanable Panel
- Connectable To Duct
- Super High Air Flow

Compact size




Only 210mm (15~71 models) or 270mm (80 to 112 models) or 300mm (140 model) in height.

External static pressure

Four speed fan motor (Super high speed is optional)
Change the wiring connection from 'SH' to 'H' to change the ESP.

Convenient installation

The EXV is fixed inside of the indoor unit.
Standard filter is housed in an aluminum frame, which is removable from the bottom in the downward direction.
Suction chamber is included as standard equipment.
Fresh air hole, air inlet/outlet flange are standard for easy duct connection.
A rear air inlet is standard and an inlet at the bottom is optional. Both use the same connectable duct.

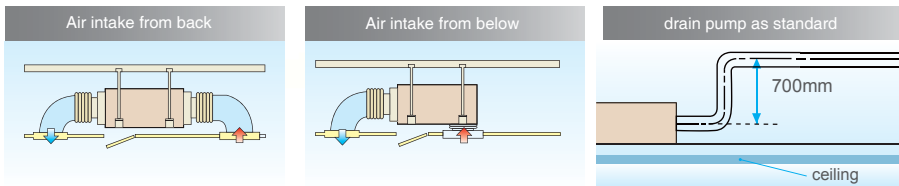

Flexible control and easy maintenance

Standard wired remote controller KJR-29B1/BK-E.
The electrical control box can be removed 1m away from the unit for easy maintenance access. Customers need to request this service in advance for it is done at Midea CAC factory.
Standard functional ports are included such as Remote On/Off Dry contact switch and Alarm signal output (220V).

Model		MDV-D15T2 /N1X-DA5	MDV-D22T2 /N1X-DA5	MDV-D28T2 /N1X-DA5	MDV-D36T2 /N1X-DA5	MDV-D45T2 /N1X-DA5	MDV-D56T2 /N1X-DA5	
Power supply		1-phase,220-240V,50Hz						
Cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6	
	kcal/h	1290	1900	2400	3100	3900	4800	
	Btu/h	5100	7500	9600	12300	15400	19100	
Heating capacity	kW	1.7	2.4	3.2	4	5	6.3	
	kcal/h	1500	2100	2800	3400	4300	5400	
	Btu/h	5800	8200	10900	13600	17100	21500	
Rated input	Cooling	W	56	57	57	61	80	80
	Heating	W	56	57	57	61	80	80
Rated current	Cooling	A	0.31	0.31	0.31	0.33	0.36	0.36
	Heating	A	0.31	0.31	0.31	0.33	0.36	0.36
Airflow rate(SH/H/ML)	m³/h	597/538/450/393	662/509/425/361	674/521/430/370	715/561/491/427	860/813/652/556	860/813/652/556	
	CFM	351/317/265/231	390/300/250/212	397/307/253/218	421/342/289/251	506/479/384/327	506/479/384/327	
EXP(external static pressure)	Pa	10(10-30)	10(10-30)	10(10-30)	10(10-30)	10(10-30)	10(10-30)	
Sound pressure level(H/M/L)	dB(A)	35.8/34.6/31.4	36/35/32	37/35/32	38.6/37.5/33.8	39/37.9/34	39/37.9/34	
Refrigerant	Type	R410A						
	Control method	EXV						
Indoor Unit	Net dim.(W×H×D)	mm	700×210×500	700×210×500	700×210×500	700×210×500	920×210×500	920×210×500
	Gross dim.(W×H×D)	mm	870×285×525	870×285×525	870×285×525	870×285×525	1095×285×525	1095×285×525
	Net/Gross	kg	17.5/20.5	17.5/20.5	17.5/20	17.5/20	22.5/25.5	22.5/25.5
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Drain piping	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard Controller	Wireless remote controller (KJR-29B1/BK-E)							

Model		MDV-D71T2/N1-DA5	MDV-D80T2/N1-BA5	MDV-D90T2/N1-BA5	MDV-D112T2/N1-BA5	MDV-D140T2/N1-BA5	
Power Supply		220 ~ 240V-1Ph-50Hz					
Capacity	Cooling	kW	7.1	8	9	11.2	14
		kcal/h	6,100	6,900	7,700	9,600	12,000
		btu/h	24,200	27,300	30,700	38,200	47,800
	Heating	kW	8	9	10	12.5	15.5
		kcal/h	6,900	7,700	8,600	10,800	13,300
		Btu/h	27,300	30,700	34,100	42,700	52,900
Power (Cooling)	Input	W	105	198	200	313	274
	Rated Current	A	0.47	1	1	1.8	1.55
Power (Heating)	Input	W	105	198	200	313	274
	Rated Current	A	0.47	1	1	1.8	1.55
Indoor air flow (SH/H/ML)	m³/h	1,146/1,003/903/742	1,400/1,226/1,018/861	1,400/1,230/1,019/859	1,750/1,752/1,552/1,389	1,789/1,918/1,539/1,250	
	CFM	675/590/532/437	917/795/687/608	917/795/687/608	1,214/1,059/921/824	1,258/1,118/967/827	
ESP (external static pressure)	Pa	10(10-30)	20(10-50)	20(10-50)	40(10-80)	40(10-100)	
Sound pressure level(H/M/L)	dB(A)	41.4/39/35	45.4/39.8/37	45.4/39.8/37	48.0/41.9/38	47.7/43.2/39.0	
Refrigerant	Type	R410A					
	Control method	EXV					
Net dimension	W×H×D	mm	1,140×210×500	1,230×270×775	1,230×270×775	1,230×270×775	1,290×300×865
Packing dimension	W×H×D	mm	1,310×285×525	1,355×350×795	1,355×350×795	1,355×350×795	1,400×375×925
Net/Gross Weight	kg	28/31	38/46.5	40/48	40/48	49/58	
Piping Connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	G(Flare)	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard Controller	-	Wired controller KJR-29B1/BK-E (6m wire is standard)					

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. piping: 8m (horizontal)
- Sound level is measured at 1.4m below the air out-let.
- * External static pressure is based on high speed indoor air flow.
- * Specifications are subject to change without prior notice for product improvement.


High Static Pressure Duct



- Auto Restart
- Fresh Air
- Auto Addressing
- Cleanable Panel
- Follow Me
- Anti-Cold Air Function
- Wired Controller
- Connectable To Duct

Flexible duct design

Four speed fan motor (super high speed as an option for models 70-160)
 External static pressure can be up to 196Pa (models 71 to 160) or 250Pa (models 200 to 560).

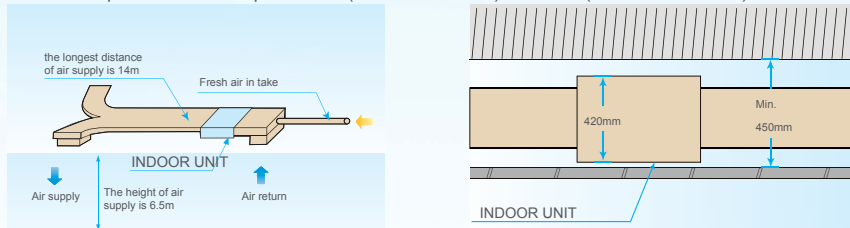

The maximum distance for air supply is about 14m at height of 6.5m.
 With a 420mm (models 71 to 160) thick body, the minimum distance required above the ceiling is 450mm.

Greater flexibility with the four-speed fan

Exchange the wiring connections for 'MH' and 'Me' (models 71 to 160).

Convenient installation

The EXV is fixed inside the indoor unit (models 70-160), requires no extra connection.
 Standard filter is housed in an aluminum frame, which is removable from the bottom in the downward direction.
 Flange for air in/outlet duct connection is standard.


Flexible control and convenient for maintenance

Wired remote controller KJR-29B1/BK-E is as standard, and wireless remote controller RM05/BG(T)E-A is as an option.

The display board is connected to the E-box in factory, easier troubleshooting by LED display.


Easy access filters both at the rear & bottom
 Standard functional port such as remote on/off dry contact.

Option

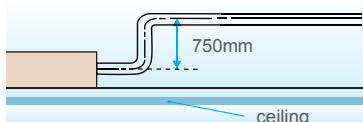

Drain pump with 750mm pump head is optional (models 71 to 160)

Double-skin drainage pan



Double-skin drainage pan provide double protection for ceilings (models 71 to 160 and models 400 to 560)

Model		MDV-D71T1/N1-B	MDV-D80T1/N1-B	MDV-D90T1/N1-B	MDV-D112T1/N1-B	MDV-D140T1/N1-B	MDV-D160T1/N1-B	
Power Supply		220 ~ 240V-1Ph-50Hz						
Capacity	Cooling	kW	7.1	8	9	11.2	14	16
		kcal/h	6,100	6,900	7,700	9,600	12,000	13,800
	Btu/h	24,200	27,300	30,700	38,200	47,800	54,600	
	Heating	kW	8	9	10	12.5	16	18
kcal/h		6,900	7,700	8,600	10,800	13,800	15,500	
Btu/h	27,300	30,700	34,100	42,700	54,600	61,400		
Power (Cooling)	Input	W	263	263	423	524	724	940
	Rated Current	A	1.1	1.1	1.8	2.3	2.7	3.6
Power (Heating)	Input	W	263	263	423	524	724	940
	Rated Current	A	1.1	1.1	1.8	2.3	2.7	3.6
Indoor air flow (H/M/L)		m ³ /h	1,400/1,330/1,210	1,400/1,330/1,210	1,940/1,830/1,515	2,115/1,940/1,520	3,000/2,615/2,230	3620/3060/2740
CFM			824/783/712	824/783/712	1,142/1,077/892	1,245/1,142/895	1,766/1,539/1,313	2130/1801/1613
ESP (external static pressure)		Pa	40(30~196)	40(30~196)	40(30~196)	50(30~196)	50(30~196)	50(30~196)
Sound pressure level(H/M/L)		dB(A)	48/46/44	48/46/44.5	52/49/47	52/49/47	53/50/48	54/52/50
Refrigerant	Type	R410A						
	Control method	EXV						
Net dimension	W×H×D	mm	952×420×690	952×420×690	952×420×690	952×420×690	1,200×400×600	1,200×400×600
Packing dimension	W×H×D	mm	1,090×440×768	1,090×440×768	1,090×440×768	1,090×440×768	1,436×450×768	1,436×450×768
Net/Gross Weight		kg	45/50	45/50	46.5/52.4	50.6/56	68/70	70/77.5
Piping Connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	G(flare)	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32
Standard Controller		Wired controller KJR-29B1/BK-E (6m wire is standard)						

Model		MDV-D200T1/N1-B	MDV-D250T1/N1-B	MDV-D280T1/N1-B	MDV-D400T1/N1	MDV-D450T1/N1	MDV-D560T1/N1	
Power Supply		220 ~ 240V-1Ph-50Hz						
Capacity	Cooling	kW	20	25	28	40	45	56
		kcal/h	17,200	21,500	24,100	34,400	38,700	48,200
	Btu/h	68,200	85,300	95,500	136,500	153,500	191,100	
	Heating	kW	22.5	26	31.5	45	50	63
kcal/h		19,400	22,400	27,100	38,700	43,000	54,200	
Btu/h	76,800	88,700	107,500	153,500	170,600	214,960		
Power (Cooling)	Input	W	1516	1516	1516	2700	2700	3400
	Rated Current	A	6.6	6.6	6.6	12.5	12.5	15.5
Power (Heating)	Input	W	1516	1516	1516	2700	2700	3400
	Rated Current	A	6.6	6.6	6.6	12.5	12.5	15.5
Indoor air flow (H/M/L)		m ³ /h	4,665/4,320/3,625	4,665/4,320/3,625	4,665/4,320/3,625	7,490/6,120/5,050	7,490/6,120/5,050	9,625/8,050/6,630
CFM			1,509/550/990	2,746/2,543/2,134	2,746/2,543/2,134	4,409/3,602/2,972	4,409/3,602/2,972	5,665/4,738/3,902
ESP (external static pressure)		Pa	140(50~250)	140(50~250)	140(50~250)	196(50~250)	196(50~250)	196(50~250)
Sound pressure level(H/M/L)		dB(A)	59/55/52	59/55/52	59/55/52	61/59/56	61/59/56	63/60/57
Refrigerant	Type	R410A						
	Control method	EXV						
Net dimension	W×H×D	mm	1,443×470×810	1,443×470×810	1,443×470×810	1,970×668×858.5	1,970×668×858.5	1,970×668×858.5
Packing dimension	W×H×D	mm	1,509×550×990	1,509×550×990	1,509×550×990	2,095×800×964	2,095×800×964	2,095×800×964
Net/Gross Weight		kg	115/129	115/129	115/129	232/245	232/245	232/245
Piping Connections	L(flare)	mm	Φ9.53×2	Φ9.53×2	Φ9.53×2	Φ12.7×2	Φ12.7×2	Φ15.9×2
	G(flare)	mm	Φ15.9×2	Φ15.9×2	Φ15.9×2	Φ22.2×2	Φ22.2×2	Φ28.6×2
	Drain piping	mm	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32
Standard Controller		Wired controller KJR-29B1/BK-E (6m wire is standard)						

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
 - Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. piping: 8m (horizontal)
 - Sound level is measured at 1.4m below the air out-let.
- * External static pressure is based on high speed indoor air flow.
 * Specifications are subject to change without prior notice for product improvement.

Ceiling & Floor



- Auto Restart
- Fresh Air
- Auto Addressing
- Cleanable Panel
- Follow Me
- Anti-Cold Air Function
- Built-in Drain Pump
- LED Display

Panel with LED display

The front panel and display panel have different colors to choose: white and brown for big panel, blue and brown for small panel. Other colors are available if required.


Convenient installation

- The unit even can be easily installed at the corner of a narrow ceilings.
- It is especially useful when central installation is impossible due to features such as lights.




The unit can be installed either horizontally on the ceiling or vertically against the wall.

Quiet and comfortable environment

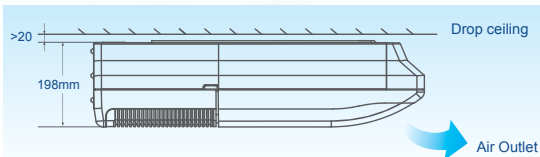

- The slim and sleek design starting at just 30kg enables quick, easy and neat installation.
- Low noise operations; minimum 36 dB(A)

Auto swing and wide angle air flow



1. Auto horizontal and auto vertical swing functions for more even and comfortable airflow.
2. Three air flow speeds: low, medium and high; double air guides.
3. Adopt electrical expansion valve, ensuring precise flow control, lower modulation noise when EXV operating.
4. Smoother airflow and less turbulence due to the multi-blade fan and the air guide design.

Model		MDV-D36DL/N1-C	MDV-D45DL/N1-C	MDV-D56DL/N1-C	MDV-D71DL/N1-C	MDV-D80DL/N1-C
Power supply		1-phase, 220-240V, 50Hz				
Cooling capacity	kW	3.6	4.5	5.6	7.1	8
	kcal/h	3,100	3,900	4,800	6,100	6,900
	Btu/h	12,300	15,400	19,100	24,200	27,300
Heating capacity	kW	4	5	6.3	8	9
	kcal/h	3,400	4,300	5,400	6,800	7,700
	Btu/h	13,600	17,100	21,500	27,300	30,700
Power input	Cooling	49	120	122	125	130
	Heating	49	120	122	125	130
Rated current	Cooling	0.55	0.55	0.55	0.57	0.6
	Heating	0.55	0.55	0.55	0.57	0.6
Airflow rate(H/M/L)	m ³ /h	650/570/500	800/600/500	800/600/500	800/600/500	1,200/900/700
	CFM	383/335/294	471/353/294	471/353/294	471/353/294	706/530/412
Sound pressure level(H/M/L)	dB(A)	40/38/36	43/41/38	43/41/38	43/41/38	45/43/40
Refrigerant	Type	R410A				
	Control method	EXV				
Net dimension(W×H×D)	mm	990×660×206	990×660×206	990×660×206	990×660×206	1,280×660×206
Packing dimension(W×H×D)	mm	1,089×744×296	1,089×744×296	1,089×744×296	1,089×744×296	1,379×744×296
Net weight	kg	26	28	28	28	34.5
Gross weight	kg	32	34	34	34	41
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ9.53	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ16	OD Φ16	OD Φ16	OD Φ16
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)				


Model		MDV-D90DL/N1-C	MDV-D112DL/N1-C	MDV-D140DL/N1-C	MDV-D160DL/N1-C
Power supply		1-phase, 220-240V, 50Hz			
Cooling capacity	kW	9	11.2	14	16
	kcal/h	7,700	9,600	13,300	13,800
	Btu/h	30,700	38,200	47,800	54,600
Heating capacity	kW	10	12.5	15.5	18
	kcal/h	8,600	10,800	13,000	15,500
	Btu/h	34,100	42,700	52,900	61,400
Power input	Cooling	130	182	182	300
	Heating	130	182	182	300
Rated current	Cooling	0.6	0.83	0.83	1.41
	Heating	0.6	0.83	0.83	1.41
Airflow rate(H/M/L)	m ³ /h	1,200/900/700	1,980/1,860/1,730	1,980/1,860/1,730	1,980/1,860/1,730
	CFM	706/530/412	1,165/1,095/1,018	1,165/1,095/1,018	1,165/1,095/1,018
Sound pressure level(H/M/L)	dB(A)	45/43/40	47/45/42	47/45/42	47/45/42
Refrigerant	Type	R410A			
	Control method	EXV			
Net dimension(W×H×D)	mm	1,280×660×206	1,670×680×244	1,670×680×244	1,670×680×285
Packing dimension(W×H×D)	mm	1,379×744×296	1,764×760×329	1,764×760×329	1,775×760×377
Net weight	kg	34.5	54	54	57.5
Gross weight	kg	41	59	59	63.5
Piping connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53
	G(flare)	mm	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	ODΦ16	ODΦ16	ODΦ16
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)			

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temp.: 7°CDB, 6°CWB, and equivalent ref. Piping: 8m (horizontal)
3. Floor standing: Sound level is measured 1m from air-outlet in horizontal distance, 1m above the floor in vertical distance.
Ceiling mounted: Sound level is measured 1m from air-outlet in horizontal distance, 1m from air-outlet in vertical distance.

* Specifications are subject to change without prior notice for product improvement.

Wall mounted

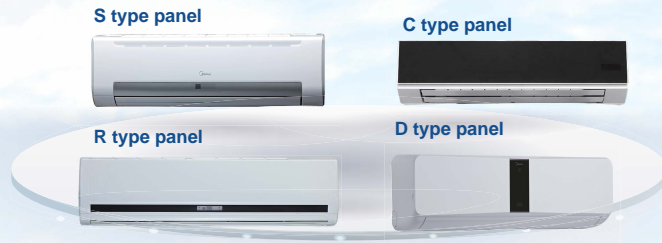


- Auto Restart
- Auto Addressing
- Cleanable Panel
- Anti-Cold Air Function
- Follow Me
- LED Display

Panel with LED display

The front panel and display panel have different colors to choose: white and brown for big panel, blue and brown for small panel.


Convenient installation

- Multi-refrigerant outlet pipe method: left/right/rear, more flexible for installation.
- For S panel, R panel & C panel, the EXV is built-in the indoor unit, compact size, longer the connection pipe; gas pipe: 468mm; liquid pipe: 550mm, more flexible for installation. For D panel, the EXV can be 5m far away from the indoor unit, which lowers the noise.
- Adopts new type fixing plate, is easy to install and stable.

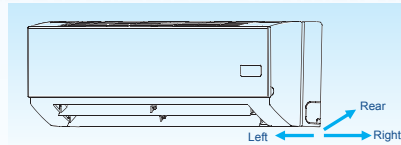


Auto swing louver

The Auto Swing Louver function ensures that the air direction corresponds to the mode selected.

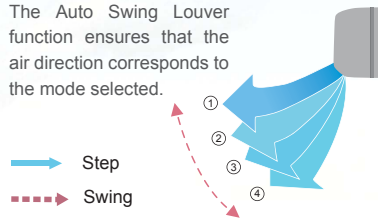

Easy maintenance

The front panel can be removed for easy maintenance access.

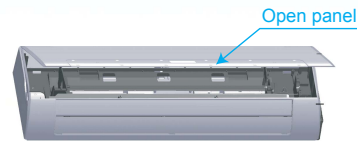

Optimal comfort through better flow control and quiet operations

The mechanical expansion valve offers 2,000-stage element positions to ensure precise flow control and less modulation noise when the EXV is operating for a quiet and comfortable environment. Three air flow speeds: low, medium and high; double air guides. Smoother airflow and less turbulence is ensured by the multi-blade fan and the air guide design.



S type panel

Model		MDV-D15G/N1-S	MDV-D22G/N1-S	MDV-D28G/N1-S	MDV-D36G/N1-S	MDV-D45G/N1-S	MDV-D56G/N1-S
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6
	kcal/h	1290	1900	2400	3100	3900	4800
Heating capacity	Btu/h	5100	7500	9600	12300	15400	19100
	kW	1.7	2.4	3.2	4	5	6.3
Rated input	Cooling	28	28	28	28	45	45
	Heating	28	28	28	28	45	45
Rated current	Cooling	0.12	0.14	0.14	0.14	0.2	0.2
	Heating	0.12	0.14	0.14	0.14	0.2	0.2
Airflow rate (H/M/L)	m³/h	427/389/336	525/480/430	525/480/430	590/520/480	860/755/630	925/860/755
	CFM	251/229/198	309/283/253	309/283/253	347/306/283	506/444/371	544/506/444
Sound pressure level (H/M/L)	dB(A)	33/31/28	35/32/29	35/32/29	35/32/29	40/38/34	40/38/34
Refrigerant	Type	R410A					
	Control method	EXV					
Indoor Unit	Net dim.(W×H×D)	915×290×230	915×290×230	915×290×230	915×290×230	1072×315×230	1072×315×230
	Gross dim.(W×H×D)	1020×390×315	1020×390×315	1020×390×315	1020×390×315	1180×415×315	1180×415×315
	Net Gross	kg	12.4/15.9	13/16.8	13/16.8	13/16.8	15.1/19.5
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Drain piping	mm	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5
Standard Controller		Wireless remote controller (RM05/BG)(T)E-A)					

Model		MDV-D22G/DN1-S	MDV-D28G/DN1-S	MDV-D36G/DN1-S	MDV-D45G/DN1-S	MDV-D56G/DN1-S	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	kcal/h	1,900	2,400	3,100	3,900	4,800	
Heating capacity	Btu/h	7,500	9,600	12,300	15,400	19,100	
	kW	2.4+0.75	3.2+0.75	4+0.75	5+0.9	6.3+0.9	
Power input	Cooling	28	28	28	45	45	
	Heating	28	28	28	45	45	
Rated current	Cooling	0.14	0.14	0.14	0.2	0.2	
	Heating	0.14+3.38	0.14+3.38	0.14+3.38	0.20+4.05	0.20+4.05	
Airflow rate (H/M/L)	m³/h	525/480/430	525/480/430	590/520/480	860/755/630	925/860/755	
	CFM	309/283/253	309/283/253	347/306/283	506/444/371	544/506/444	
Sound pressure level (H/M/L)	dB(A)	35/32/29	35/32/29	35/32/29	40/38/34	40/38/34	
Refrigerant	Type	R410A					
	Control method	EXV					
Net dimension (W×H×D)	mm	915×290×230	915×290×230	915×290×230	1,072×315×230	1,072×315×230	
Packing dimension (W×H×D)	mm	1,020×390×315	1,020×390×315	1,020×390×315	1,180×415×315	1,180×415×315	
Net weight	kg	13.3	13.3	13.3	15.1	15.5	
Gross weight	kg	17.5	17.5	17.5	19.9	19.9	
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Drain piping	mm	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5
Standard Controller		Wireless remote controller (RM05/BG)(T)E-A)					

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. Piping: 8m (horizontal)
3. Sound level is measured 1m below the air outlet horizontally and vertically.

* Specifications are subject to change without prior notice for product improvement.

C type panel

Model		MDV-D22G/N1YB	MDV-D28G/N1YB	MDV-D36G/N1YB	MDV-D45G/N1YB	MDV-D56G/N1YB	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	kcal/h	1,900	2,400	3,100	3,900	4,800	
	Btu/h	7,500	9,600	12,300	15,400	19,100	
Heating capacity	kW	2.4	3.2	4	5	6.3	
	kcal/h	2,100	2,800	3,400	4,300	5,400	
	Btu/h	8,200	10,900	13,600	17,000	21,500	
Power input	Cooling	W	28	28	28	45	45
	Heating	W	28	28	28	45	45
Rated current	Cooling	A	0.14	0.14	0.14	0.2	0.2
	Heating	A	0.14	0.14	0.14	0.2	0.2
Airflow rate(H/M/L)	m³/h	520/480/430	520/480/430	520/480/430	860/755/630	925/860/755	
	CFM	306/283/253	306/283/253	306/283/253	506/444/371	544/506/444	
Sound pressure level(H/M/L)	dB(A)	35/32/29	35/32/29	35/32/29	40/38/34	40/38/34	
Refrigerant	Type	R410A					
	Control method	EXV					
Net dimension(W×H×D)	mm	915×290×210	915×290×210	915×290×210	1,070×315×210	1,070×315×210	
Packing dimension(W×H×D)	mm	1,020×385×300	1,020×385×300	1,020×385×300	1,165×395×285	1,165×395×285	
Net weight	kg	12	12	12	15	15	
Gross weight	kg	17.5	17.5	17.5	19	19	
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Drain piping	mm	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)					

Model		MDV-D22G/DN1YB	MDV-D28G/DN1YB	MDV-D36G/DN1YB	MDV-D45G/DN1YB	MDV-D56G/DN1YB	
Power supply		1-phase, 220-240V, 50Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	kcal/h	1,900	2,400	3,100	3,900	4,800	
	Btu/h	7,500	9,600	12,300	15,400	19,100	
Heating capacity	kW	2.4+0.75	3.2+0.75	4+0.75	5+0.9	6.3+0.9	
	kcal/h	2,100+600	2,800+600	3,400+600	4,300+800	5,400+800	
	Btu/h	8,200+2,600	10,900+2,600	13,600+2,600	17,100+3,100	21,500+3,100	
Power input	Cooling	W	28	28	28	45	45
	Heating	W	28	28	28	45	45
Rated current	Cooling	A	0.14	0.14	0.14	0.2	0.2
	Heating	A	0.14+3.38	0.14+3.38	0.14+3.38	0.2+4.05	0.2+4.25
Airflow rate(H/M/L)	m³/h	520/480/430	520/480/430	520/480/430	860/755/630	925/860/755	
	CFM	306/283/253	306/283/253	306/283/253	506/444/371	544/506/444	
Sound pressure level(H/M/L)	dB(A)	35/32/29	35/32/29	35/32/29	40/38/34	40/38/34	
Refrigerant	Type	R410A					
	Control method	EXV					
Net dimension(W×H×D)	mm	915×290×210	915×290×210	915×290×210	1,070×315×210	1,070×315×210	
Packing dimension(W×H×D)	mm	1,020×385×300	1,020×385×300	1,020×385×300	1,165×395×285	1,165×395×285	
Net weight	kg	12	12	12	15	15	
Gross weight	kg	17.5	17.5	17.5	19	19	
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Drain piping	mm	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5	ODΦ16.5
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)					

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
 - Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. piping: 8m (horizontal)
 - Sound level is measured 1m below the air outlet horizontally and vertically.
- * Specifications are subject to change without prior notice for product improvement.

R type panel

Model		MDV-D71G-R3/N1Y	MDV-D80G-R3/N1Y	MDV-D90G-R3/N1Y	
Power supply		1-phase, 220-240V, 50Hz			
Cooling capacity	kW	7.1	8	9	
	kcal/h	6,100	6,900	7,700	
	Btu/h	24,200	27,300	30,700	
Heating capacity	kW	8	9	10	
	kcal/h	6,900	7,700	8,600	
	Btu/h	27,300	30,700	34,100	
Power input	Cooling	W	79	86	
	Heating	W	79	86	
Rated current	Cooling	A	0.33	0.39	
	Heating	A	0.33	0.39	
Airflow rate(H/M/L)	m³/h	1,190/880/680	1,320/840/640	1,320/840/640	
	CFM	700/518/400	776/494/376	776/494/376	
Sound pressure level(H/M/L)	dB(A)	47/43/42	48/43/38	49/43/38	
Refrigerant	Type	R410A			
	Control method	EXV			
Net dimension(W×H×D)	mm	1,250×325×245	1,250×325×245	1,250×325×245	
Packing dimension(W×H×D)	mm	1,345×335×430	1,345×335×430	1,345×335×430	
Net weight	kg	19.9	19.9	19.9	
Gross weight	kg	25	25	25	
Piping connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53
	G(flare)	mm	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ16.5	OD Φ16.5	OD Φ16.5
Standard Controller	-	Wireless remote controller(RM05/BG(T)E-A)			


D type panel

Model		MDV-D22G/N1Y-11D5	MDV-D28G/N1Y-11D5	MDV-D36G/N1Y-11D5	MDV-D45G/N1Y-11D5	MDV-D56G/N1Y-11D5	MDV-D71G/N1Y-11D5	
Power supply		1-phase, 220-240V, 50Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
	kcal/h	1900	2400	3100	3900	4800	6100	
	Btu/h	7500	9600	12300	15400	19100	24200	
Heating capacity	kW	2.4	3.2	4	5	6.3	8	
	kcal/h	2100	2800	3400	4300	5400	6900	
	Btu/h	8200	10900	13600	17100	21500	27300	
Rated input	Cooling	W	25	29.9	38.7	42.1	61.7	79
	Heating	W	25	29.9	38.7	42.1	61.7	79
Rated current	Cooling	A	0.13	0.15	0.18	0.21	61.7	79
	Heating	A	0.13	0.15	0.18	0.21	0.3	0.35
Airflow rate (H/M/L)	m³/h	367/295/263	491/403/341	576/419/360	724/511/436	1056/883/741	1182/842/702	
	CFM	216/174/155	289/237/201	339/247/212	426/301/257	622/520/436	696/496/413	
Sound pressure level(H/M/L)	dB(A)	33/31/28	33/31/28	33/31/28	38/36/32	38/36/32	43/41/38	
Refrigerant	Type	R410A						
	Control method	EXV						
Indoor Unit	Net dim.(W×H×D)	mm	680×255×180	770×255×190	770×255×190	905×275×205	1030×315×220	1030×315×220
	Gross dim.(W×H×D)	mm	885×310×395	975×310×395	975×310×395	1110×310×395	1240×310×415	1240×310×415
Piping connections	NetGross	kg	6.5/11.4	7.4/12.3	7.4/12.3	9.1/14.2	12.9/18.2	12.9/18.2
	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Φ9.53
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9	Φ15.9
Drain piping	mm	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16
	Standard Controller	-	Wireless remote controller (RM05/BG(T)E-A)					

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
 - Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. piping: 8m (horizontal)
 - Sound level is measured 1m below the air outlet horizontally and vertically.
- * Specifications are subject to change without prior notice for product improvement.

Floor Standing

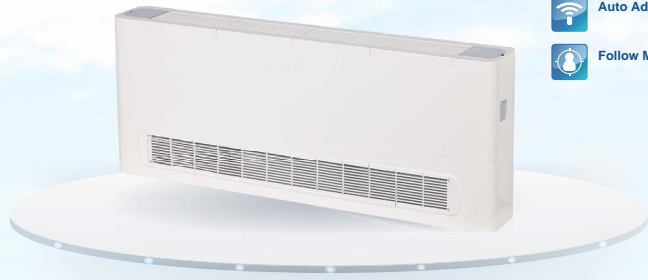

- Auto Restart
- Cleanable Panel
- Auto Addressing
- Anti-Cold Air Function
- Follow Me
- LED Display

Easy installation

Floor standing types can be hung on the wall or installed on the floor. The floor type of unit can make cleaning and maintenance much easier. Running the piping from the rear allows the unit to be hung on walls. Cleaning under the unit, where dust tends to accumulate, is considerably easier.


Easy maintenance

Filter is provided as a standard accessory. It can be removed and cleaned easily thanks to Midea's sophisticated design and the product's removable blades.

The streamlined appearance harmonizes the unit with a given room's interior decor. All metal parts are made of commercial grade galvanized steel for maximum protection against corrosion.


Saves installation space

Concealed floor standing type



F3B series concealed type

The body is concealed in the skirting board to improve aesthetics. The body is just 212mm deep, and can be installed at the room's perimeter. Special installation methods eliminate noise in the room area.



Air intake from front(F4 series)



Air intake from below(F5 series)

Model	MDV-D22Z/N1-F3B		MDV-D28Z/N1-F3B		MDV-D36Z/N1-F3B		MDV-D45Z/N1-F3B		MDV-D56Z/N1-F3B		MDV-D71Z/N1-F3B		MDV-D80Z/N1-F3B	
	MDV-D22Z/N1-F4		MDV-D28Z/N1-F4		MDV-D36Z/N1-F4		MDV-D45Z/N1-F4		MDV-D56Z/N1-F4		MDV-D71Z/N1-F4		MDV-D80Z/N1-F4	
	MDV-D22Z/N1-F5		MDV-D28Z/N1-F5		MDV-D36Z/N1-F5		MDV-D45Z/N1-F5		MDV-D56Z/N1-F5		MDV-D71Z/N1-F5		MDV-D80Z/N1-F5	
Power supply	1-phase, 220-240V, 50Hz													
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8						
	kcal/h	1,900	2,400	3,100	3,900	4,800	6,100	6,900						
	Btu/h	7,500	9,500	12,300	15,400	19,100	242,00	27,300						
Heating capacity	kW	2.4	3.2	4	5	6.3	8	9						
	kcal/h	2,100	2,800	3,400	4,300	5,400	6,900	7,700						
	Btu/h	8,200	10,900	13,600	17,100	21,500	27,300	30,700						
Power input	Cooling	W	40	46	46	49	88	130	130					
	Heating	W	40	46	46	49	88	130	130					
Rated current	Cooling	A	0.19	0.2	0.19	0.22	0.38	0.57	0.57					
	Heating	A	0.19	0.2	0.15	0.22	0.38	0.57	0.57					
Airflow rate(H/M/L)	m ³ /h	530/456/400	569/485/421	624/522/375	660/542/440	1,150/970/830	1,380/1,100/870	1,380/1,100/870						
	CFM	312/268/235	335/285/248	367/307/221	388/319/259	677/571/489	812/647/512	812/647/512						
Sound pressure level(H/M/L)	F3B	dB (A)	36/33/29	36/33/29	37/34/30	37/34/30	41/35/31	44/39/33	44/39/33					
	F4		36/33/29	36/33/29	37/34/30	37/34/30	41/35/31	44/39/33	44/39/33					
	F5		36/33/29	36/33/29	37/34/30	37/34/30	41/35/31	44/39/33	44/39/33					
Refrigerant	Type	R410A												
	Control method	EXV												
Net dimension (W×H×D)	F3B	mm	840×544×212	840×544×212	1,036×544×212	1,036×544×212	1,336×544×212	1,336×544×212	1,336×544×212	1,336×544×212	1,336×544×212	1,336×544×212	1,336×544×212	1,336×544×212
	F4		1,000×625×220	1,000×625×220	1,200×625×220	1,200×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220
	F5		1,000×625×220	1,000×625×220	1,200×625×220	1,200×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220	1,500×625×220
Packing dimension (W×H×D)	F3B	mm	939×639×305	939×639×305	1,139×639×305	1,139×639×305	1,439×639×305	1,439×639×305	1,439×639×305	1,439×639×305	1,439×639×305	1,439×639×305	1,439×639×305	1,439×639×305
	F4		1,089×683×312	1,089×683×312	1,289×683×312	1,289×683×312	1,589×683×312	1,589×683×312	1,589×683×312	1,589×683×312	1,589×683×312	1,589×683×312	1,589×683×312	1,589×683×312
	F5		1,182×683×312	1,182×683×312	1,382×683×312	1,382×683×312	1,682×683×312	1,682×683×312	1,682×683×312	1,682×683×312	1,682×683×312	1,682×683×312	1,682×683×312	1,682×683×312
Net/Gross weight	F3B	kg	26/29.5	26/29.5	29.5/34	29.5/34	36/40	36/40	36/40	36/40	36/40	36/40	36/40	36/40
	F4		30/35	30/35	37/43	37/43	44/50	44/50	44/50	44/50	44/50	44/50	44/50	44/50
	F5		30/38	30/38	37/46	37/46	44/53	44/53	44/53	44/53	44/53	44/53	44/53	44/53
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	G(flare)		Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	
	Drain piping		ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16	ODΦ16
Standard Controller	Wireless remote controller(RM05/BG(T)E-A)													

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. Piping: 8m (horizontal)
- Sound level is measured 1m from the air out-let in horizontal distance and 1m above the floor in vertical distance.

* Specifications are subject to change without prior notice for product improvement.



Console



- Auto Restart
- Cleanable Panel
- Auto Addressing
- Anti-Cold Air Function
- Follow Me
- LED Display

Compact size and stylish

- The elegant and thin unit body complements the existing decor and saves space.
- The EXV is installed inside of the indoor unit for added compactness.

Flexible installation

- Can be installed on the floor or lower wall
- As a floor standing type, it can be semi or fully accessed without losing capacity.



High Comfort

- Flexible air blow: vertical auto swing and wide angle louvers ensure that warm air reaches every corner of the room and increases the air flow coverage.
- Indoor unit adopts DC motor with five fan speeds to meet different requirements.
- Applies the Fujikoki mechanical expansion valve which offers 2,000-stage element positions to ensure precise flow control and lower modulation noise when the EXV is operating.

Powerful mode can be selected for rapid cooling or heating



High efficiency filter

- Built in formaldehyde nemesis filter
- Active-carbon and biological anti-virus filter are optional.

Two air outlets and four air inlets

Four directions of air inlet; two options of air outlet: Up and Down; or Up only.



Bottom, top, and right/left side, for better ventilation.

Low-noise design

Five-speed indoor unit; low noise; low power consumption.



Low noise operation, lowest to 26dB(A)

Model		MDV-D22Z/DN1-B	MDV-D28Z/DN1-B	MDV-D36Z/DN1-B	MDV-D45Z/DN1-B	
Power supply		1-phase, 220-240V, 50Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.5	
	kcal/h	1,900	2,400	3,100	3,900	
	Btu/h	7,500	9,600	12,300	15,400	
Heating capacity	kW	2.6	3.2	4.0	5.0	
	kcal/h	2,200	2,800	3,400	4,300	
	Btu/h	8,900	10,900	13,600	17,100	
Power input	Cooling	20	25	25	45	
	Heating	20	25	25	45	
Rated current	Cooling	0.09	0.11	0.11	0.2	
	Heating	0.09	0.11	0.11	0.2	
Airflow rate(H/M/L)	m ³ /h	430/345/229	510/430/229	510/430/229	660/512/400	
	CFM	253/203/135	300/253/135	300/253/135	388/300/235	
Sound pressure level(H/M/L)	dB(A)	38/32/26	39/33/27	39/33/27	42/39/36	
Refrigerant	Type	R410A				
	Control method	EXV				
Net dimension(W×H×D)	mm	700×600×210	700×600×210	700×600×210	700×600×210	
Packing dimension(W×H×D)	mm	810×710×305	810×710×305	810×710×305	810×710×305	
Net weight	kg	14	15	15	15	
Gross weight	kg	19	20	20	20	
Piping connections	L(flare)	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35
	G(flare)	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7
	Drain piping	-	OD Φ16	OD Φ16	OD Φ16	OD Φ16
Standard Controller		Wireless remote controller(RM05/BG(T)E-A)				

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, and outdoor temperature: 35°CDB, equivalent ref. piping: 8m (horizontal)
 - Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, and equivalent ref. Piping: 8m (horizontal)
 - Sound level is measured 1m from the air out-let in horizontal distance and 1m above the floor in vertical distance.
- * Specifications are subject to change without prior notice for product improvement.


Fresh Air Processing Unit



Healthy and comfortable

Fresh air is imported, provides a healthy and comfortable living environment.

100% Fresh air processing unit

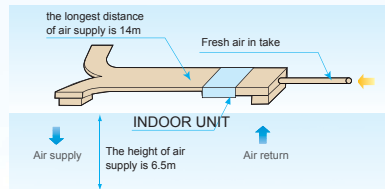


Both fresh air filtration and heating/cooling can be achieved in a single system. Indoor units and fresh air processing unit can be connected to the same refrigerant system, increasing design flexibility and greatly reducing total system costs.

High external static pressure

External static pressure can be up to 220Pa (models 125 to 140) and 260Pa (models 200 to 280) for more flexible duct applications. The maximum distance of air supply is about 14m and the maximum height of air supply is about 6.5m.

Innovative air supply technology for excellent room temperature control

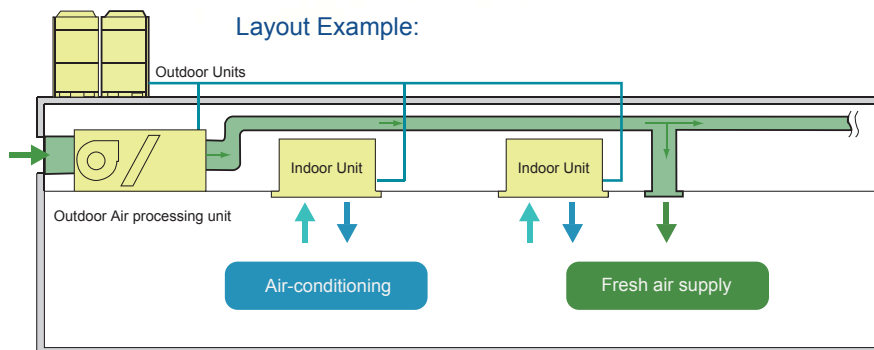

Model		MDV-D125T1/N1-FA	MDV-D140T1/N1-FA	MDV-D200T1/N1-FA	MDV-D250T1/N1-FA	MDV-D280T1/N1-FA	
Power Supply		1-phase, 220-240V, 50Hz					
Capacity	Cooling	kW	12.5	14	20	25	28
		kcal/h	10,800	12,000	17,200	21,500	24,100
	Heating	Btu/h	42,700	47,800	68,200	85,300	95,500
		kW	10.5	12	18	20	22
Power (Cooling)	Input	W	430	430	1063	1,063	1063
		Rated Current	A	2.4	2.4	5.3	5.6
Power (Heating)	Input	W	461	430	1063	1,063	1,063
		Rated Current	A	2.3	2.4	5.3	5.6
Air flow (H/M/L)		m ³ /h	1,700/1,350/1,050	1,700/1,350/1,050	3,150/2,650/2,300	3,300/2,850/2,500	3,300/2,850/2,500
ESP (external static pressure)		Pa	50(30~220)	50(30~220)	140(50~260)	140(50~260)	140(50~260)
Sound pressure level(H/M/L)		dB(A)	54/52/50	54/52/50	54/53/51	55/54/52	55/54/52
Refrigerant	Type	R410A					
	Control method	EXV					
Net dimension	W×H×D	mm	1,368×420×691	1,368×420×691	1,443×470×810	1,443×470×810	1,443×470×810
Packing dimension	W×H×D	mm	1,436×440×768	1,436×440×768	1,509×522×964	1,509×522×964	1,509×522×964
Net/Gross Weight		kg	69.5/76	69.5/76	115/125	115/125	115/125
Piping Connections	L(flare)	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	G(flare)	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Drain piping	mm	OD Φ25	OD Φ25	OD Φ32	OD Φ32	OD Φ32
Standard Controller		-	Wired controller KJR-29B1/BK-E (6m wire is standard)				

Notes:

1. Nominal cooling capacities are based on the following conditions: outdoor air temperature: 33°C DB, 24°C WB, equivalent ref. piping: 8m (horizontal)
2. Nominal heating capacities are based on the following conditions: outdoor air temperature: 0°C DB, -1°CWB, equivalent ref. Piping: 8m (horizontal)
3. Sound level is measured 1.4m from the air out-let.

- * external static pressure are based on high speed indoor air flow.
- * Specifications are subject to change without prior notice for product improvement.

Connection Conditions:


The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- * When outdoor-air processing units are connected, the total connection capacity must be within 50% to 100% of that of the outdoor units.
- * When outdoor-air processing units and standard indoor units are connected, the total connection capacity of the outdoor-air processing units must not exceed 30% of that of the outdoor units.
- * Outdoor-air processing units can be used without indoor units.



Control Systems

Network Control

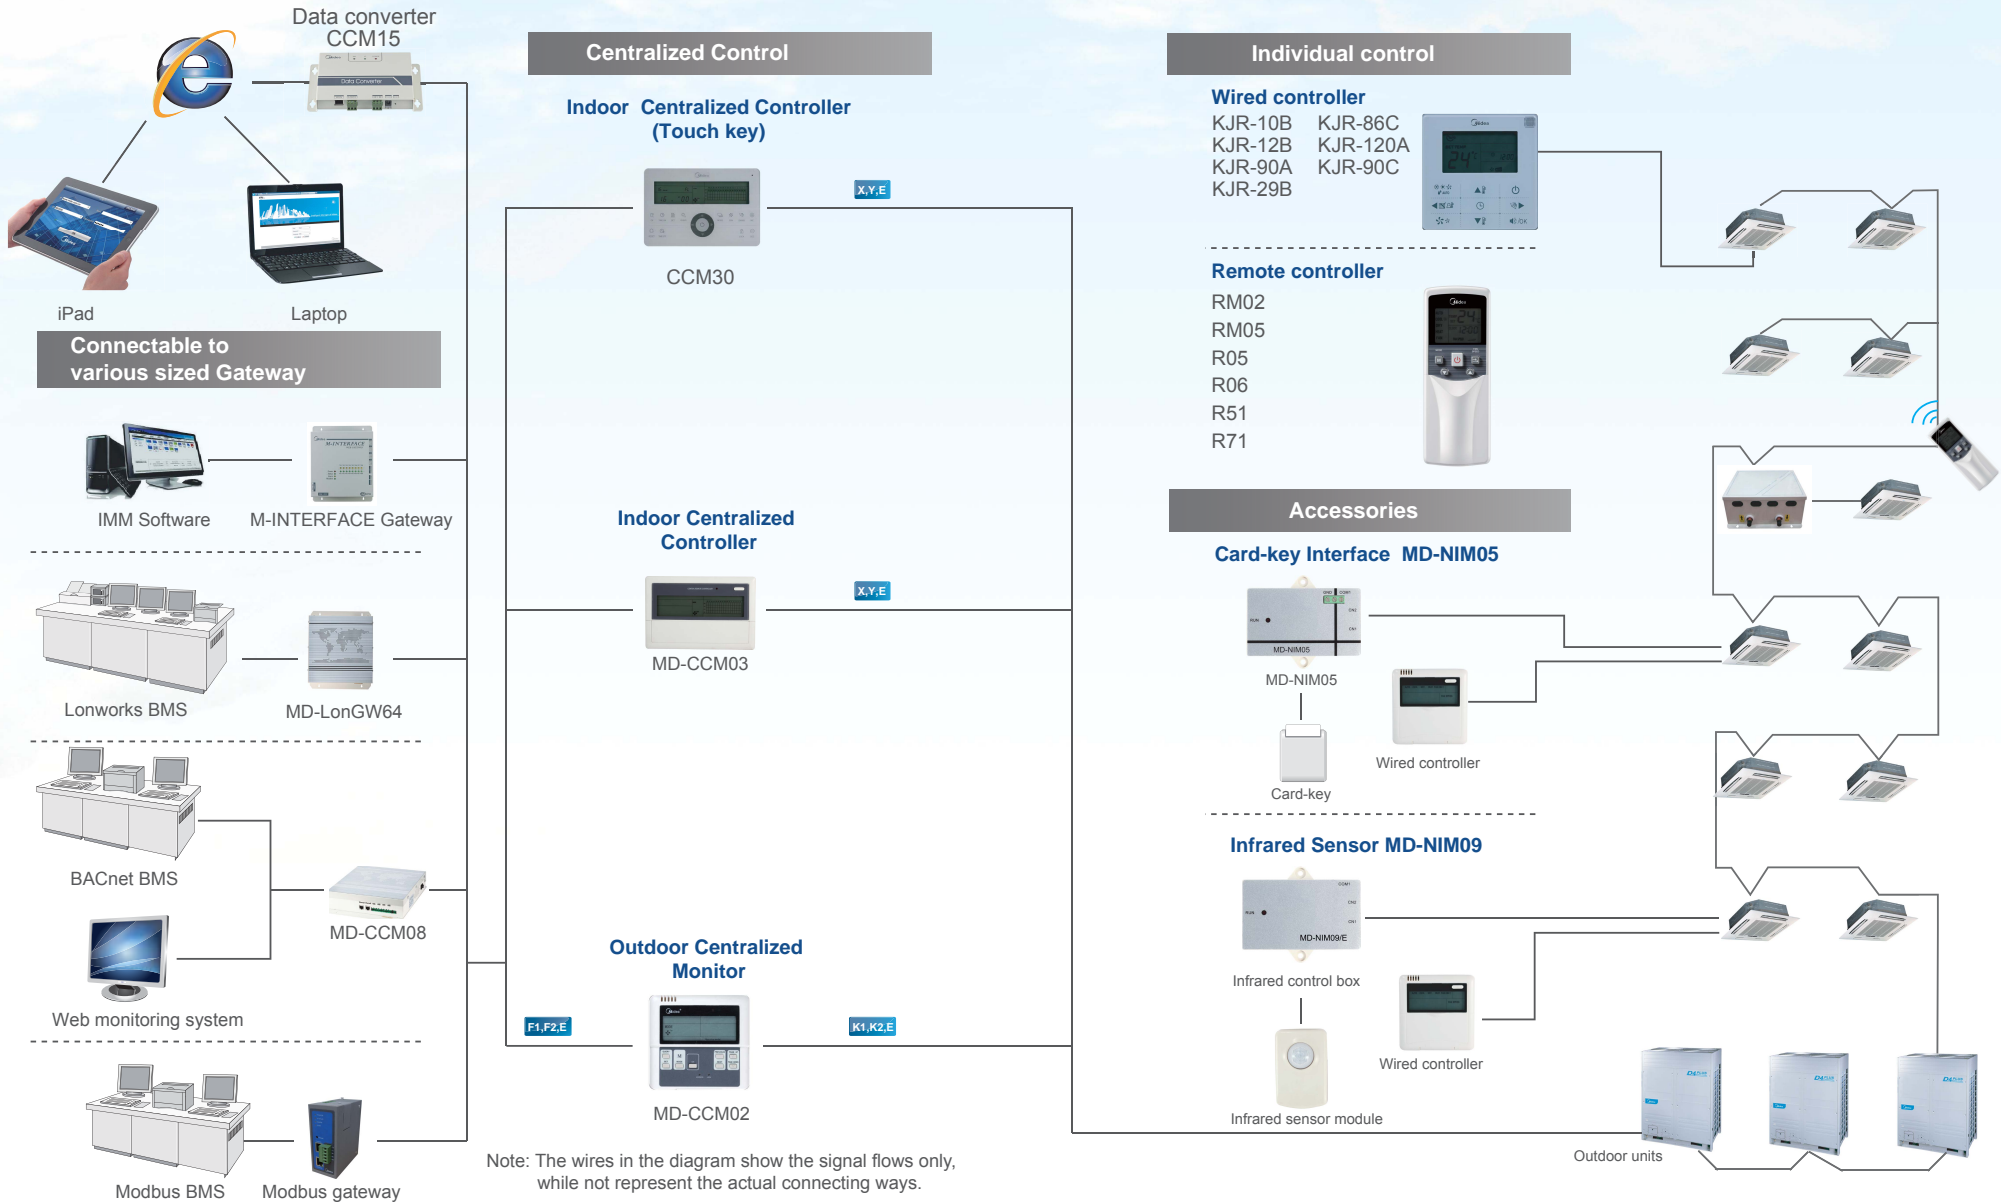

Comparison of Controllers

Item	Remote controller			Wired Controller				Centralized Controller			
	Model name	RM05/RM02	R51/R71	R05/R06	KJR-10B/KJR-12B	KJR-120A	KJR-90A/KJR-86C	KJR-29B/KJR-90C	CCM30/MD-CCM03	MD-CCM09	KJR-90B
MAX. controllable IDU		/		1	1	1	1	64	64	16	
A/C control function	On/Off	•	•	•	•	•	•	•	•	•	
	Operation mode setting	•	•	•	•	•	•	•	•	•	
	Fan speed setting	•	•	•	•	•	•	•	•	-	
	Room temp. setting	•	•	•	•	•	•	•	•	-	
	Vertical swing	•	•/-	•/-	-	-	-	-	-	-	-
	Horizontal swing	•	•	•	•	•	•/-	•	•	•	-
	Air direction	•/-	-/•	•	-	-	-	-	-	-	-
	Economic mode	•	•	•/-	•	•	-	-	-	-	-
	Central setting	-	-	-	-	-	-	-	•	•	•
	Keyboard lock	•	•/-	•	•	•	•	•	•	•	-
	Mode lock	-	-	-	-	-	-	-	•	•	-
	Remote signal receiving	-	-	-	-	-	-	•	-	-	-
	26°C shortcut setting	-/•	-	-	-	-	-/•	-	-	-	-
	Silent mode	-	-	-	-	-	-	•	-	-	-
Display	Backlight	•	•/-	•	•/-	•	-/•	•	•	•	
	Current time	•/-	-	•	•/-	•	•/-	-	-	•	
	RC prohibition	-	-	-	-	-	-	•	•	-	
	Address	-	-	-	-	-	-	•	•	-	
	Error code	-	-	-	-	•	-	•	•	-	
Timer	Room temp.	-	-	-	-	-	-/•	-	-	-	
	Period	-	-	-	-	-	-	-	Week	-	
	On/Off per day	-	-	-	-	-	-	-	4	-	
	On/Off per week	-	-	-	-	-	-	-	28	-	
Control	On/Off timer	•	•	•	•	•	•/-	•	•	-	
	FOLLOW ME	-/•	-	-	-/•	-	-	•	-	-	
	Emergent stop	-	-	-	-	-	-	•	-	-	
	Emergent start	-	-	-	-	-	-	-	•	-	
	Address setting	•	-	-	-	-	-	•	-	-	
	BMS access	-	-	-	-	-	-	-	•	-	
	Control via internet	-	-	-	-	-	-	-	•	-	
	Air filter cleaning reminding	-	-	-	•/-	•	-	•	•/-	-	

• : Available controller functions
 - : Not available controller functions

Wireless Remote Controller



Functions


Portable device

The wireless remote controller is a portable control device that enables users to control the A/C anywhere within a distance of 11m.



Simplified user interface

Users can synchronize the air conditioners' parameters with the display panel on the wireless remote controller to precisely control a room's environment.

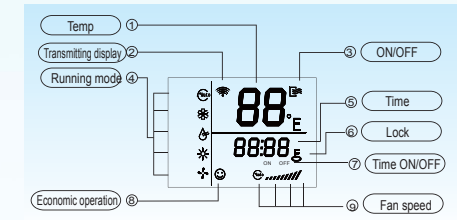


Background light

The background light allows users to operate the device in a dark room. The device lights up when a button is pressed, and turns off when a given operation is completed.



Built-in timer

The built-in daily timer offers the convenience of automatically starting and stopping the system at set times.



The indoor unit is set to work in automode from 8:00 to 20:00

Setting addresses

Besides the machine's auto addressing function, users can set the indoor unit's address on the wireless remote controller RM05/RM02.



Model	RM02	RM05	R05	R06	R51	R71
Dimensions (H×W×D)(mm)	150×60×15	150×65×20	150×65×20	100×55×20	140×60×15	125×42×27
Power (V)	1.5V(LR03/AAA)×2					


Wired Controller



KJR-29B



KJR-90C




Functions

Air filter cleaning reminding

The wired controller records the total running time of the indoor unit. When the accumulated running time reaches the pre-set value, it will remind users need to clean the air filter of the indoor unit.

Clean the filter regularly can keep indoor air fresh and clean, good for your health.



*Available for KJR-10B/KJR-29B/KJR-90C model.

Silent mode

Under the cooling, heating and auto mode, when operate the silent mode, it can reduce the running noise through setting the fan speed to low. This will help you bring a quieter environment.



KJR-29B
(Touch key)

Remote signal receiver
Air filter cleaning reminding icon
Silent Key

Remote signal receiving function

KJR-29B and KJR-90C provide a signal receiver for remote controller. Signal from remote controller can be received by a wired controller, then sent to the indoor unit and it conveniences to control.

Locking wired controller

The locking function can be used to prevent other people from using the controller.

Specifications

Model	29B	90C
Dimensions (H×W×D)(mm)	120×120×20	86×86×16.5
Power (V)	DC 5V	


Wired Controller



KJR-10B



KJR-12B



Functions

Follow me



With the FOLLOW ME function, the wired controller can detect the air temperature at the user's altitude instead of that of the ceiling or floor. This helps making the room environment comfortable and the temperature accurate.

*The follow me function is available for KJR-12B/KJR-29B model.


Setting addresses

With the address setting function, and easy for the installation and future service. The service person can set the address for indoor unit by KJR-10B, KJR-29B and KJR-90C.




Built-in timer

Built-in daily timer offers the convenience of automatically starting and stopping the system at set times.



Easy connection

The wired controller conveniently connects to the indoor unit's display panel via connecting wire.

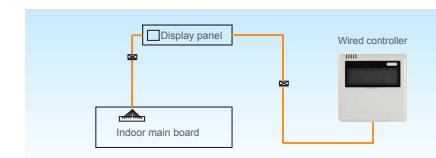

Specifications

Model	10B	12B
Dimensions (H×W×D)(mm)	120×120×15	120×120×15
Power (V)	DC 5V	

Wired Controller



KJR-90A



KJR-86C



KJR-120A

Functions

Features

- Small and easy to install
- Suitable for all types of indoor units
- Can be stored in a mounting cabinet




KJR-90A

Built-in timer

Built-in daily timer offers the convenience of automatically starting and stopping the system at set times.

Mode setting

Mode-button hidden controller: Press the temperature buttons "▲" and "▼" simultaneously for 3 seconds to select the operation mode: COOL and HEAT. The design is suitable for hotels, hospitals, schools and other similar types of buildings.



KJR-86C

Auto mode

For V4 plus R series used only. Under the auto mode of V4 plus R system, it can automatically switch to COOL or HEAT mode according to the temperature difference value between Tf(indoor temperature) and Ts(setting temperature)



KJR-120A

Specifications

Model	90A	86C	120A
Dimensions (H×W×D)(mm)	90×86×13	86×86×18	120×120×20
Power (V)	DC 5V		

Wired Controller

HRV Wired Controller

KJR-27B



Functions

HRV controller

KJR-27B is individually designed for HRV—Heat Recovery Ventilator. The HRV can work in the following modes: exhaust, air supply, bypass, heat exchange, and auto.

**AUTO->HEAT EXCHANGE->
EXHAUST->BYPASS->AIR SUPPLY**

Built-in timer

Built-in daily timer offers the convenience of automatically starting and stopping the HRV at the set times.

Setup screen example
Set to wednesday: 8:00 to 20:00



Specifications

Model	KJR-27B
Dimensions(H×W×D)(mm)	120×120×15
Power (V)	198-242V(50/60Hz)

Weekly Schedule Controller

MD-CCM04



Functions

Simple design

MD-CCM04 can be used as a weekly schedule wired controller or general wired controller. It can query the indoor temperature and the setting parameters of the weekly schedule. It can display the error codes and running state of the indoor unit. With the LCD backlight, and allows users to operation the device in a dark room.

Delay function

The function is specially designed for a person who is working overtime. During the weekly schedule running, press delay button it will delay 1hour or 2 hours to turn off the air conditioner.

Weekly schedule

Users can set up to 4 periods per day, and select the desired running mode and room temperature.

	8:00	16:00	23:59
Sun	28°C	22°C	24°C
Mon	28°C	22°C	23°C
Tue	28°C	22°C	23°C
Wed	28°C	22°C	23°C
Thu	28°C	22°C	26°C
Fri	28°C	22°C	26°C
Sat	28°C	off	24°C

Specifications

Model	MD-CCM04
Dimensions (H×W×D)(mm)	120×120×15
Power (V)	DC 5V

Centralized Controller


Indoor Centralized Controller



MD-CCM03



CCM30

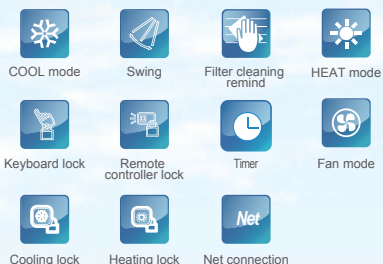

Functions

Centralized control


The centralized controller is a multifunctional device that can control up to 64 indoor units within a maximum connection length of 1,200m.

The device connects to the master outdoor units of Midea's newly designed products to simplify and centralize the wiring configuration. The two connection modes are as follows:




Indoor unit working status display

The centralized controller displays indoor units' working status and error codes so users can easily identify faults via checking the error codes table in the user's manual before contacting a service engineer.

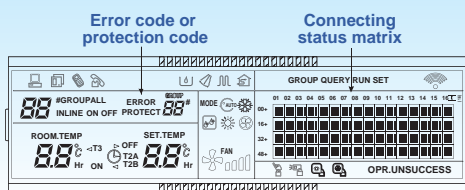


Air filter cleaning reminding function

The air filter cleaning reminder function is only available on the touch-key central controller CCM30. The "FL" icon indicates that the air filter in a given indoor unit needs cleaning.

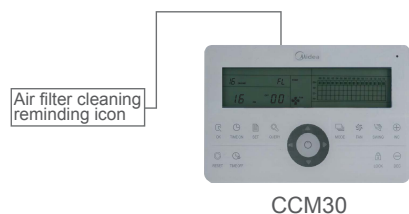

Three lock modes

Centralized controller provides a superior way to manage the indoor units. Users are able to make their own choice from locking the running mode or lock the centralized controller's keyboard as they wish.

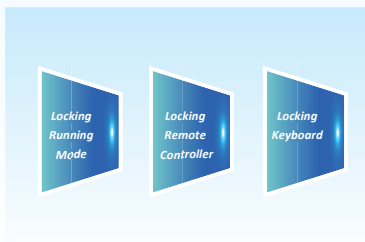

Functions


Stylish design

CCM's stylish design suits high-end environments. The keyboard lock function is used to prevent operational mistakes.




Single/unified control

The control object can be either a single unit or all units, which vastly simplifies the control process. Operation signal feedback ensures that all units are working in the correct mode.

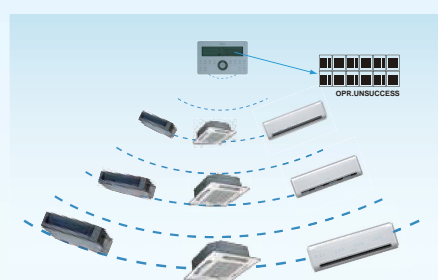


Easy installation

Centralized controller offers two different appearances to mostly suit the installation. The A structure must be embedded into the wall and the B structure doesn't need. Both of them are easy to operate.

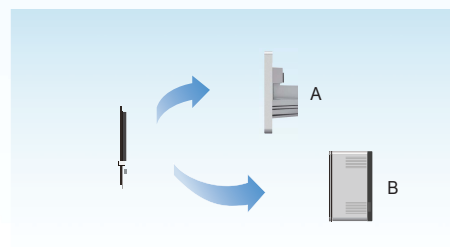


*The A,B structure is available for CCM30, and MD-CCM03 only has B structure

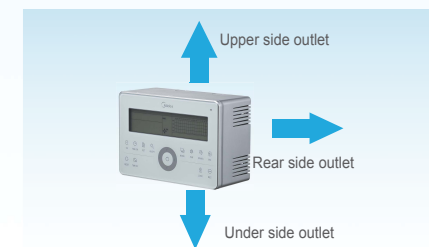

B structure leading-out mode sketch

Access to network monitoring

The centralized controller is able to bridge up to 64 indoor units on the network monitoring and building management systems.



Specifications

Model	MD-CCM03	CCM30
Dimensions (H*W*D)(mm)	179*119*74	180*122*78 and 180*122*68
Power (V)	198-242V(50/60Hz)	

Centralized Monitor Outdoor Centralized Monitor


MD-CCM02



Functions

ODU parameters display

MD-CCM02 enables users to easily check outdoor units' running status, including frequency, temperature, current, pressure, protection codes and error codes.

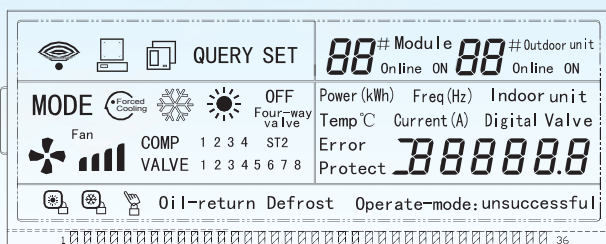

Graph 2 LCD Screen

Access to network monitoring

MD-CCM02 can connect up to 8 refrigerant systems and 32 outdoor units to the network network system.



Specifications

Model	MD-CCM02
Dimensions(H×W×D)(mm)	120×120×15
Power (V)	198-242V(50/60Hz)

Central Control Software



Central Control Software

IMM(Intelligent Manager of Midea) 4th Generation Network Control System




Functions

Intelligent Manager of Midea, designed specifically to control VRF systems, is based on a centralized format and dedicated to the complete control and monitoring of all the system's functions. It can be used as a flexible multi-purpose system and applied to a variety of needs, according to the scale, purpose and control method of each building.


- Up to 4 M-interfaces, 64 refrigerant systems, 1,024 indoor units, and 256 outdoor units can be controlled by one PC.
- Web Access
- User friendly operation
- Central building monitoring and control
- Energy saving management
- SMS modem (optional)
- Electricity charge distribution
- Annual schedule control
- Low-load operation indicate
- Generate operational history reports (daily, weekly, monthly)
- Fault display & Warning message
- Filter replacement reminder
- Emergency stop and Alarm signal output

Network Control Application

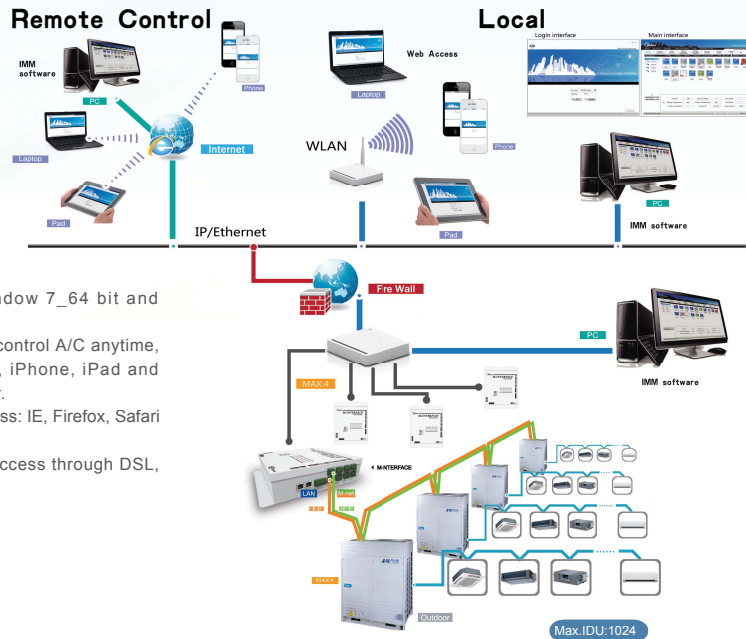

- Can run on ,Window 7_64 bit and Window XP_32 bit.
- Can monitor and control A/C anytime, anywhere by PC, iPhone, iPad and notebook computer.
- Support WEB access: IE, Firefox, Safari and Chrome.
- Enables remote access through DSL, VPNs and so on.

Various Managements

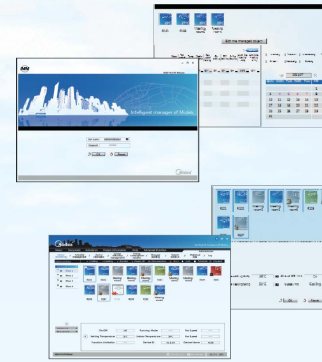

Simple Operation and Management

Click & Operate, a user-friendly interface allows even non-experts to perform the building management system easily.

Data Management

Operational information of individual indoor units are monitored, allowing for distribution of power consumption at outdoor units.

Stores operation data on multiple systems and displays it in graphical format for visual management.

Uses IMM software to generate tenant reports and help building owners bill for energy use.

Electricity Charge Distribution(Patented)

Provides information on proportional electrical power distribution to optimize electricity consumption management.

Uses software to calculate electric power proportional distribution, output and save electricity consumption data for each indoor unit (or group) which is connected to the intelligent manager.

Applies the patented Midea Calculation Method to calculate consumption rates according to capacity demand which is based on various parameters: setting temperature, room temperature, running mode, rated HP, public areas, unused rooms, and nighttime use; outputs this information on a charge calculation sheet to evenly divide power consumption charges among tenants.

Highlights



Web Access function

With the web access function, a PC, laptop computer or a smart phone can be used as a remote controller.



Visual Navigation

Clicking the jump button will display a list of all available screens. Clicking the back button will return to the previous screen.



Energy Saving Management

Based on a predetermined schedule, the Intelligent Manager executes capacity control and intermittent operations on all air conditioning units to maintain a high comfort index.



Data Backup

The M-interface will automatically back up data on the installed SD card (2GB) in case system failure occurs, such as: power failure or system dam. IMM software also stores the previous 3 months' operational data on the HDD.



Schedule Control

Automatically performs facility start/stop control, switches the operating mode, sets temperatures and enables/disables the remote control according to the present time schedule. 4 sections and 20 actions per day for each single unit or group.



Multiple Languages

Provides seven language settings:

- | | | |
|----------------|--------|---------|
| English | French | Italian |
| Russian | German | Spanish |
| Simple Chinese | | |



Warning Message

The system can receive error messages from air conditioning units in more than one buildings or structures via public phone lines.

*Requires the Midea "SMS Modem" to send automatic warning messages to designated phone numbers.



Electricity Charge Distribution

Electricity charges can be easily divided when billing users for air conditioning power charges; for example, for tenants in a commercial building, offices in a rented building, or rooms in a hotel.

Accessories


Data converter CCM15

- Can realize data conversion between TCP/IP protocol and 485 protocol.
- WEB function realizes VRF system's webpage access.
- User can monitor and query the air conditioners through LAN and WAN.
- Providing the TCP / IP port for VRF system of Midea to achieve WEB/HTTP/TCP/IP access.
- Can remotely control the A/C systems through computer, iPhone, iPad or other intelligent terminals.



Network example

- Can be directly connected with XYE port of the indoor units.
- Up to connect 64 indoor units.
- CCM03/CCM30 is optional and can be connected with CCM15 through F1, F2 and E ports.
- The system consisting A/C system, data converter CCM15, router, cloud server and control terminal.

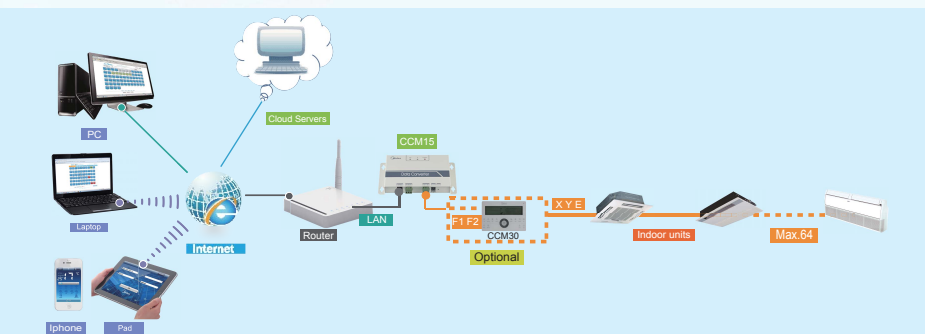


Simply control interface

- Software control/ Cloud server control (WEB access).
- Click & operate, a user-friendly interface.
- Allows signal and group control.
- Simplified user control interface.
- Colour indication and icon makes it easy to recognize unit state.
- Can full screen display and the temperature can be adjusted by fingers' sliding.



Weekly schedule control

- With weekly schedule function for iPad.
- Multiple sections in each day for each single unit or group.
- Automatically performs facility start/stop control, operating mode, setting temperatures and according to the present time schedule.



Web features

- Query and control single unit or group.
- Weekly schedule setting: can set multiple sections in each day for each single unit or group.
- Group user control : a user can use the same ID to manage hundreds of CCM15, when selecting the "As group user" button on the login page.
- History error: easy service and management with history error function.

Intelligent control

- The air conditioner remote control can be realized by mobile phone or tablet computer.
- You can query the running state of the air conditioner any time and any where and even make an appointment in advance.
- Can remotely turn off the air conditioner to avoid the power waste, when you are in a hurry to leave.



Accessories

BACnet® BMS Gateway


MD-CCM08

Contains 4 groups of RS485 communication ports and be able to connect up to 256 indoor units or 128 outdoor units to the BMS. Be free to connect to the BMS or not.



Network example

One MD-CCM08 gateway can connect MAX.4 CCM02 or CCM03, and each 485 port only can connect one CCM02 or one CCM03/CCM30.

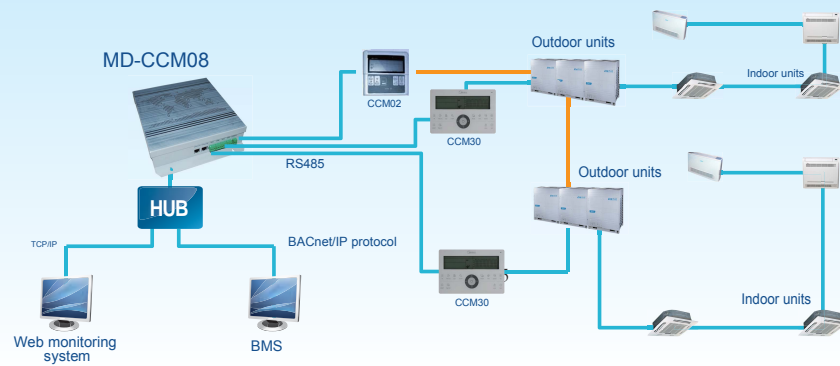

Control system

Monitoring units online

MD-CCM08 allows users to track units' operational status and change their running parameters on Internet Explorer for maximum control convenience

Wide compatibility

CCM08 has a wonderful adaptability to the BMS

	Company	BMS software	Brand
1	SIMENS	APOGEE	
2	TRANE	Tracer Summit	
3	Honeywell	Alerton	
4	Schneider	Andover	
5	Johnson	METASYS	

Accessories


Modbus BMS Gateway

Supports Modbus protocol networks
Bridges the Midea central A/C system and the BMS
Establishes a Modbus network comprising up to 1,024 indoor units and 64 outdoor units
Transfers data in RTU mode
Provides a wide voltage range: 12-48V DC



Network example

Modbus agreement system

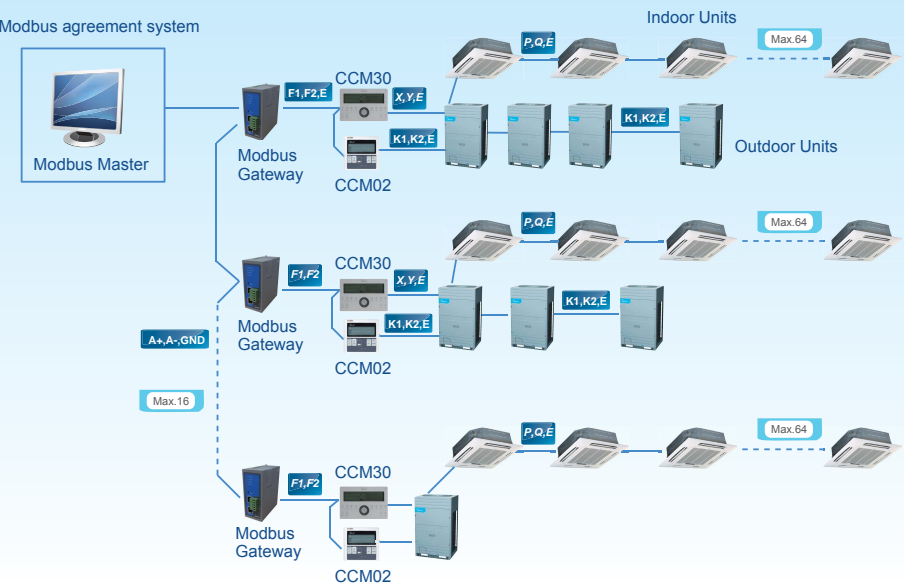


Control system

One Modbus gateway can bridge one refrigerant system with a PC or the Modbus master.


Config A/C System via Web

When the Modbus network is set, users can conveniently configure their A/C network system over the Internet using different TCP/IP browsers.

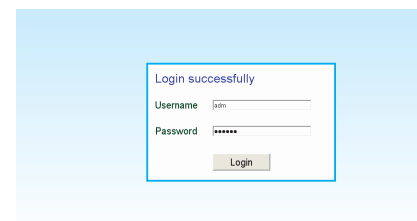

Dimensions

The Modbus Gateway is designed with a small size. It's equipped a installation track for the easy on-site installation.

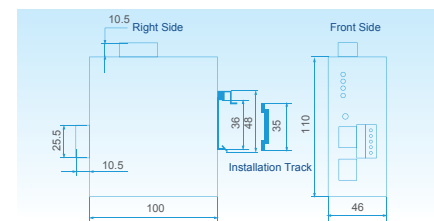

Accessories


LonWorks® BMS Gateway MD-LonGW64

Compliance with LonMark protocol, and realizes the management and control of A/C.
Can connect up to 64 indoor units to the BMS.
Realizes non-polarity communication, and also the application can be download online.




Network example

Connection method 1: Suitable for all of air conditioner systems and connect max.64 indoor units.

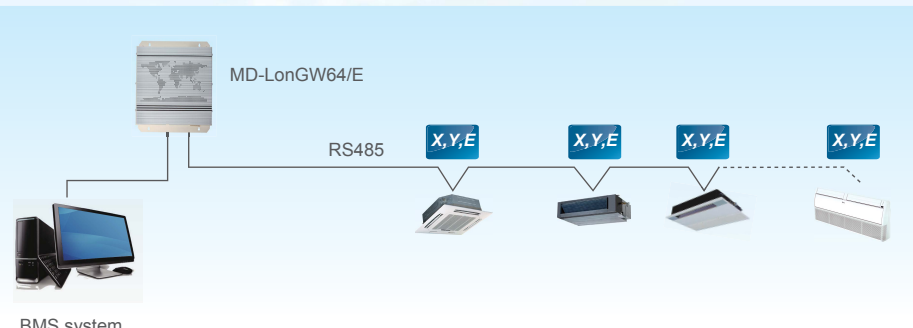

Connection method 2: Only suitable for V4 plus system and connect max.64 indoor units.

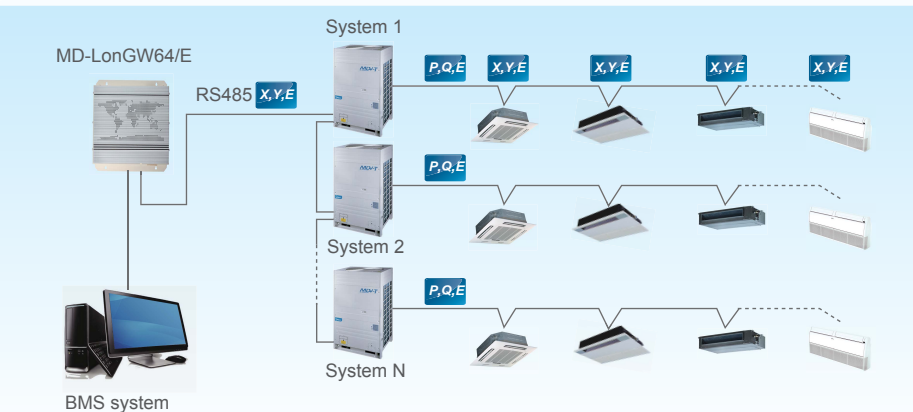

Specifications

Model	MD-LonGW64
Dimensions (H*W*D)(mm)	31.9×25.1×6.1
Power (V)	177~265V AC(50Hz/60Hz)

Accessories

3-Phase Protector HWUA/DPB71CM48

Detect the power condition and make the corresponding protecting action.
Protect the compressor from being damaged.
Automatically distinguish the abnormal power supply conditions and automatically recover.



HWUA DPB71CM48

Excellent reliability

The protector protects the entire system from power supply problems, and auto restart after recovery.

Specifications

Model	With over/under voltage function				Without over/under voltage function
	HWUA	DPA53CM23	HWUA	DPB71CM48	DPA51CM44
Power supply (V-N-Hz)	220~480V-3N 50/60Hz	208~480V-3N 50/60Hz	220~480V-3N 50/60Hz	380~480V-3N 50/60Hz	208~480V-3N 50/60Hz
Temp. range(°C)	-20°C~50°C	50Hz: -20°C~60°C 60Hz: -20°C~50°C	-20°C~50°C	-20°C~50°C	50Hz: -20°C~60°C 60Hz: -20°C~50°C
Rated operational power(VA)	2.9 VA	7 VA	2.9 VA	13 VA	13 VA
Over voltage	12%	12%	18%	18%	18%
Under voltage	-12%	-12%	-12%	-12%	/
Phase imbalance	8%	/	8%	8%	/
Dimensions(W×H×D)(mm)	90×69×35	81×67.2×17.5	90×69×35	81×67×35	81×67.2×17.5

Digital Power Ammeter

DTS634/DTS636


Calculates power consumption.
Does not need adjusting after long-term use.
Corresponds one outdoor unit to one digital power meter.



Low power consumption

The digital power meter consumes minimal energy.
Voltage circuit: less than 2W/10VA
Current circuit: less than 2.5VA

Indications and installation




The digital power meter is tested after manufacture so it can be immediately deployment and used on-site. The LED indicators and installation schematic are shown in the figure on the left.

Specifications

Model	DTS634/DTS636
Dimensions (H*W*D)(mm)	230×145×72
Power (V)	200V-500V(50/60Hz)

Remote Alarm Controller

KJR-32B



Functions

Simple design

KJR-32B is specially designed for engineering applications. It does not display the ODU's working parameters, but it can connect to the alarm device when ODU is working abnormally, the RUN light will flash.

Specifications

Model	KJR-32B
Dimensions (H*W*D)(mm)	150×85×70
Power (V)	198-242V(50/60Hz)

Indoor Unit Group Controller

KJR-150A




Functions

Simple design

KJR-150A is specially designed for V4 plus indoor units. A group controller can connect up to 16 V4 plus indoor units through X1, Y1 and E terminals, but it cannot directly connect to the central controller. If you need to use a central controller or a PC, you can connect to the XYE from an outdoor unit. A group controller can control a group of indoor units simultaneously, and query the running status of each unit in the group via the display panel.

System wiring diagram

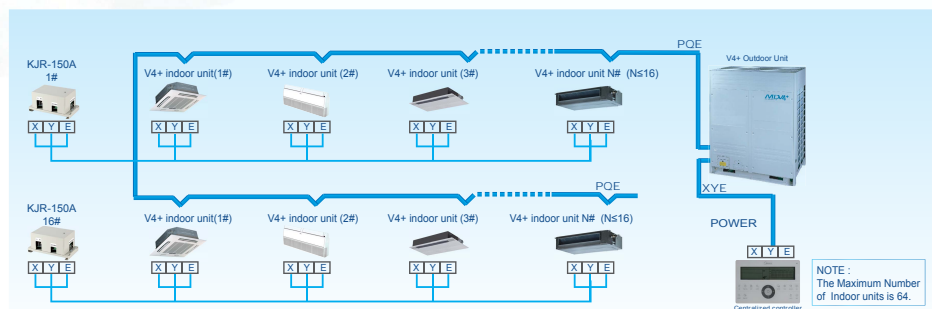

Specifications

Model	KJR-150A
Dimensions (H*W*D)(mm)	150×85×70
Power (V)	198-242V(50/60Hz)

Accessories


Infrared sensor controller

MD-NIM09


Automatically adjust the room environment.

Automatically extend the shutting down time, avoiding frequent ON/OFF.

Graceful appearance accommodates itself to different buildings.

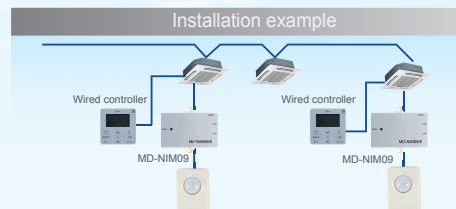

MD-NIM09 works together with the wired controller.

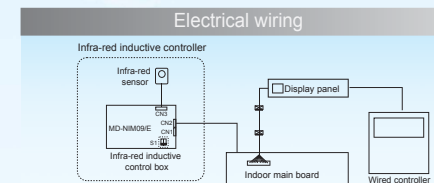

Specifications

Model	MD-NIM09
Dimensions(H*W*D)(mm)	Senor part: 46×30×25.6, Control box: 86×72.8×15.5
Power	DC 5V



Hotel Card Key Interface Module

MD-NIM05


Cooperate with the wired controller to automate control.

Eliminates the need for high voltage power, making the device safe and steady.

Includes a build-in auto-restart function.

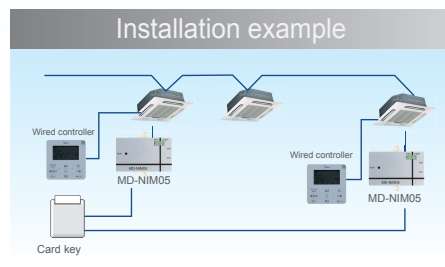

Wired controller is necessary in this card-key system.

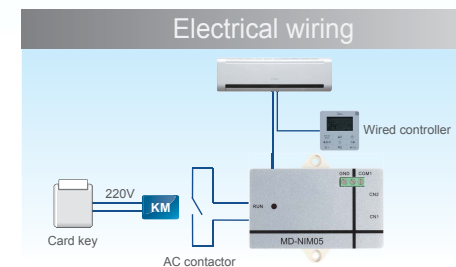

Specifications

Model	MD-NIM05
Dimensions (H*W*D)(mm)	86×72.8×15.5
Power (V)	DC 5V

Accessories

AHU Control Box

AHUKZ-01A/AHUKZ-02A/AHUKZ-03A


V4+ functions inside.

Can be used to connect VRF outdoor units with DX AHU or other brand indoor units



Introduction

AHUKZ-01A/AHUKZ-02A/AHUKZ-03A is an independent control box that can connect a AHU to V4 plus system to realize centralized control with V4 plus system. Control box wiring is as follows:

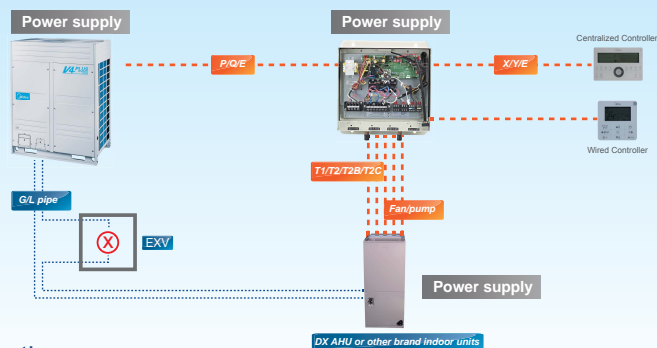


Specifications

Model	AHUKZ-01A/AHUKZ-02A/AHUKZ-03A
Dimensions(H×W×D)(mm)	335×375×150
Power (V)	220-240V~ 50Hz 208-230V~ 60Hz


Midea Outdoor Unit Diagnosis Software MCAC-DIAG/E

Display the outdoor units' real-time running conditions. Automatically outputs running status charts. Supports V3, V4, V4+, D3, D4 outdoor units.



Wiring diagram

The diagnostic software applies to K1, K2, E of the outdoor units. The corresponding wiring diagram is shown in the figure on the right.

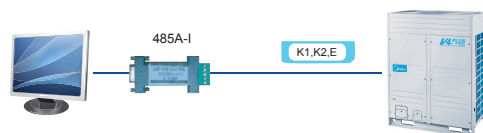

Recommended config


Operating system	WIN XP SP4/WIN 7
CPU	Pentium 4 2G or above
HDD	30G free space
Interface port	RS-232 terminal

Selection software

To meet consultants' and distributors' requirements, Midea has developed an advanced design automation tool that can be used in AutoCAD-based CAD version or Windows-based Sales version. The software provides quick and convenient selectable options for users, supports multiple languages, and greatly improves the selection process.


Windows Version

Load calculation: Provides two calculation methods (detailed room load calculation and rough load calculation).
 Indoor & outdoor units selection: There are versatile indoor units and different outdoor units for choosing.
 Piping drawing: Displays the detailed layout of an A/C system and the parameters for piping and branch distributors.
 Controller selection: Provides a selection of controllers for indoor units and outdoor units, including wireless and remote controllers for indoor units.
 Report output: Outputs a comprehensive selection report as a Word or PDF document.

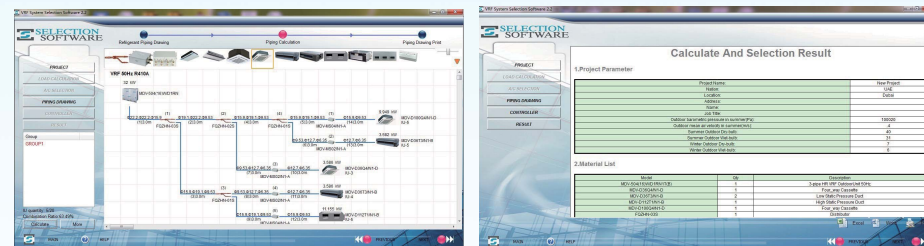

CAD Version

AutoCAD add-on software
 Automatic Calculation: Refrigerant & drain pipe size
 Automatic Selection: Distributor kit & branch joint
 System Check: Installation regulation & refrigerant addition
 Automatic Report: Piping installation diagram, equipment list & quotation

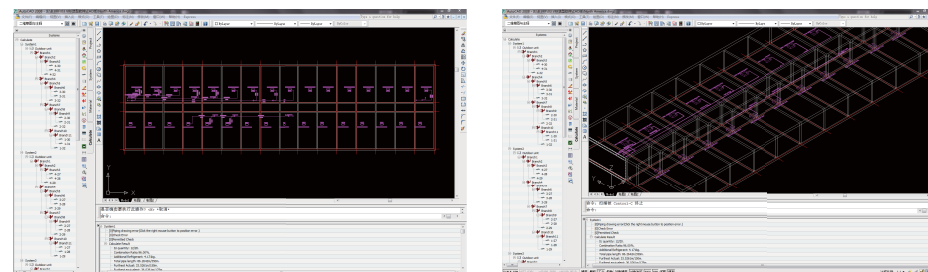

HRV


Heat recovery ventilator

Larger air supply rate
enhanced heat exchange efficiency
enhanced energy saving property

The heat recovery ventilator (HRV) can reclaim heat energy lost through ventilation and reduce the room temperature fluctuation caused by ventilation process. By utilizing the most advanced technology and technics, Midea HRV has extremely good performance. The heat exchanged core is made of special paper processed with chemical treatment, which could realize better temperature and humidity control of the room environment. Temperature exchange efficiency is above 65% and enthalpy exchange efficiency between 50-65%.

Model Names

HRV-400	HRV-800
HRV-500	HRV-1000
HRV-1500	HRV-2000

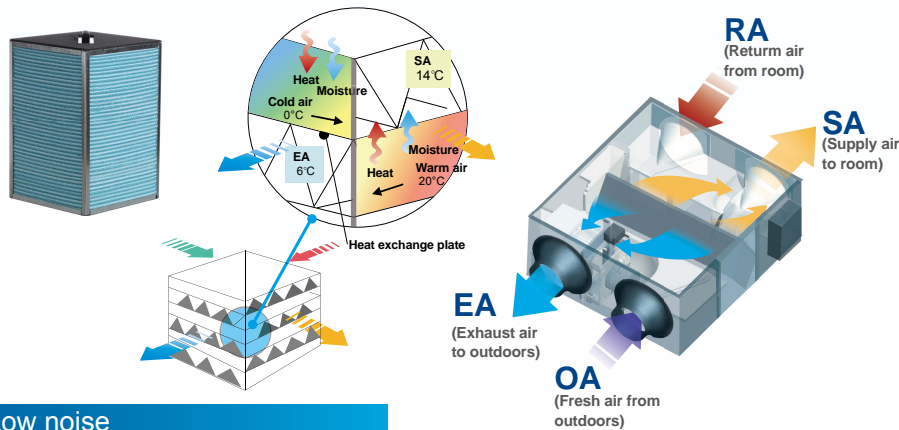


Low noise

Sound proof material is used to guarantee quiet operation.

Compact design, flexible installation and easy maintenance


With a min. height of only 10-25/64in.(264mm) and 50lbs (23kg) weight, the unit provides best convenience and possibility for installation in limited spaces.



Multi-modes for different situations

Heat exchange mode

When air flow formed by the fans goes through the heat exchanged core in cross way, due to temperature difference between two channels of the core, thermal transmission happens naturally. In summer days, high temperature outdoor air gets cooled by indoor exhaust air; in winter, low temperature outdoor air gets heated by indoor exhaust air. So the energy contained in exhaust air can be reclaimed and energy efficiency gets improved.

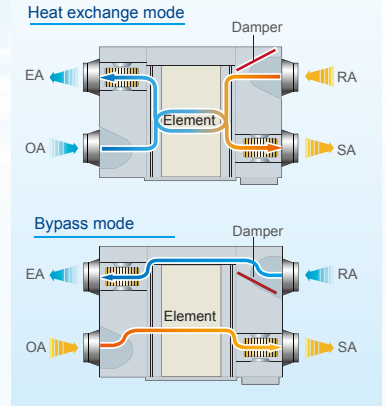

Bypass mode

In mild climate areas or seasons, when temperature and humidity level difference between indoor and outdoor is small, the unit works as conventional ventilation fan. Both supply fan and exhaust fan works at the same speed (Hi/mid/low/auto).

Air supply mode

It is one kind of bypass mode with air supply fan speed higher than exhaust fan speed. It can be used in mild climate area where large amount fresh air is needed.

Exhaust air mode


It is also one kind of bypass mode with exhaust fan speed higher than air supply fan speed. It can be used in mild climate area where large amount exhaust air needs to be expelled.

Auto mode

The controller chooses heat exchange mode or bypass mode according to the temperature difference between outdoor and indoor temperature. Both the two fans work at low speed.

Flexible control

Interlocking control with other indoor units by controller is possible.

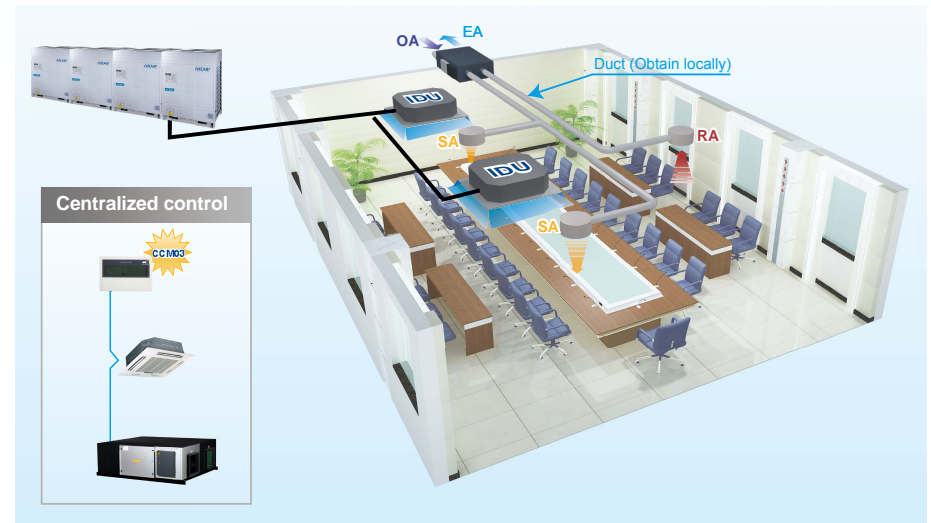

Specifications

Model			HRV-400	HRV-500	HRV-800
Power Supply			V/Ph/Hz 220V~60Hz		
Temp. Exchange Efficiency (%) [60Hz]			65	65	65
			70	70	70
Enthalpy Exchange Efficiency (%) [60Hz]	For Cooling	High	50	50	50
		Medium	50	50	50
		Low	55	55	55
	For Heating	High	60	60	60
		Medium	60	60	60
		Low	65	65	65
Sound Level	Heat Exchange Mode	High	32	35	39
		Medium	31	34	38
		Low	25	28	32
	Bypass Mode	High	33	36	40
		Medium	32	35	39
		Low	27	30	34
Dimensions(W×D×H)			mm 944×927×270	10,38×1,026×270	1,286×1,006×388
Machine Weight			kg 31	41	62
Casing			Galvanized steel plate		
Heat Exchange System			Air to air cross flow total heat (Sensible heat + latent heat) exchange		
Heat Exchange Element Material			Specially processed nonflammable paper		
			Centrifugal fan		
Fan	Airflow Rate [60Hz]	High	400	500	800
		Medium	400	500	800
		Low	300	375	600
	ESP (Pa) [60Hz]	High	80	80	100
		Medium	65	68	82
		Low	43	45	54
Motor Output			W 80	120	360
Duct diameter			Φ/mm 144	194	242
Operation ambient condition			19.4°F~109.4°F (-7°C~43°C) DB, 80%RH or Less		

Model			HRV-1000	HRV-1500	HRV-2000
Power Supply			V/Ph/Hz 220V~60Hz 220V 3N~60Hz		
Temp. Exchange Efficiency (%) [60Hz]			65	65	65
			65	/	/
			70	/	/
Enthalpy Exchange Efficiency (%) [60Hz]	For Cooling	High	50	50	50
		Medium	50	/	/
		Low	55	/	/
	For Heating	High	60	60	60
		Medium	60	/	/
		Low	65	/	/
Sound Level	Heat Exchange Mode	High	40	51	53
		Medium	39	/	/
		Low	33	/	/
	Bypass Mode	High	41	52	54
		Medium	40	/	/
		Low	35	/	/
Dimensions(W×D×H)			mm 1,286×1,256×388	1,600×1,270×540	1,650×1,470×540
Machine Weight			kg 79	163	182
Casing			Galvanized steel plate		
Heat Exchange System			Air to air cross flow total heat (Sensible heat + latent heat) exchange		
Heat Exchange Element Material			Specially processed nonflammable paper		
			Centrifugal fan		
Fan	Airflow Rate [60Hz]	High	1,000	1,500	2,000
		Medium	1,000	/	/
		Low	750	/	/
	ESP (Pa) [60Hz]	High	100	160	170
		Medium	85	/	/
		Low	58	/	/
Motor Output			W 360	450	450
Duct diameter			Φ/mm 242	346×326	346×326
Operation ambient condition			19.4°F~109.4°F (-7°C~43°C) DB, 80%RH or Less		

Note:

- For the units model of HRV (400-1000), there are 3-speed adjustable air volume (Hi, Med, Low), but for the units model of HRV (1500-2000), there are only 1-speed which cannot be adjusted.
- Sound level is measured at 1.4m below the center of the body in an anechoic chamber..
- Airflow rate can transit between low mode and high mode
- Temperature Exchange Efficiency is the mean value between cooling and heating
- Efficiency is measured under the following conditions:
 - * Cooling Condition: Air Exhaust Temp. 27°C DB, 19.5°C WB., Fresh Air Temp. 35°C DB, 28°C WB
 - * Heating Condition: Air Exhaust Temp. 21°C DB, 13°C WB., Fresh Air Temp. 5°C DB, 2°C WB



Branch Pipe →

Branch Pipe

Branch joints				
Model	Appearance	Model name	Packing Size (mm) Gross Weight (kg)	Description
Branch joint for 410A outdoor unit		FQZHW-02N1D	255×150×185/1.5	For two outdoor units connection
		FQZHW-03N1D	345×160×285/3.4	For three outdoor units connection
		FQZHW-04N1D	475×165×300/4.8	For four outdoor units connection
Branch joint for R410A indoor unit		FQZHN-01D	290×105×100/0.4	$A^* < 16.6\text{kW}$
		FQZHN-02D	290×105×100/0.6	$16.6\text{kW} \leq A^* < 33\text{kW}$
		FQZHN-03D	310×130×125/0.9	$33\text{kW} \leq A^* < 66\text{kW}$
		FQZHN-04D	350×180×170/1.5	$66\text{kW} \leq A^* < 92\text{kW}$
		FQZHN-05D	365×195×215/1.9	$92\text{kW} \leq A^*$

A*:The total capacity of indoor units following this branch joint

Dimensions

Outdoor branch joints		
Branch model	Gas side joints	Liquid side joints
FQZHW-02N1D		
FQZHW-03N1D		
FQZHW-04N1D		

