Daikin Altherma low temperature split Technical Data EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W



EEDEN25A

TABLE OF CONTENTS
EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

1	Features	4
	EHBH-E6V, EHBH-E9W, EHBX-E6V, EHBX-E9W	4
2	Specifications	5
3	Electrical data	13
4	Combination table	15
5	Dimensional drawings	16
6	Centre of gravity	17
7	Piping diagrams	18
8	Wiring diagrams	19
	Notes & Legend	19
	Control Circuit	20
	Power Supply, Back-up Heater	23
9	External connection diagrams	24
10	Installation	25
	Installation Method	25
11	Operation range	26
12	Hydraulic performance	27
	Static Pressure Drop Unit	27

1 Features

1 - 1 EHBH-E6V, EHBH-E9W, EHBX-E6V, EHBX-E9W

Wall mounted heating only air to water heat pump ideal for low energy houses

- W-LAN Adapter connection
- PCB board and hydraulic components are located in the front for easy access
- Compact dimensions allows for small installation space, as almost no side clearances are required.
- The unit's sleek design blends in with other household appliances.
- Combine with a stainless steel tank or ECH2O thermal store.



Onecta app (optional)

Online controller

2 Specifications

2 - 1 Specifications

Technical specifications					EHBH04E6V	EHBH08E6V
Heater capacity	Step 1			kW	2	
	Step 2			kW	2 or 4	
Power input	Nom.			kW	0.09	
Casing	Colour				White + Black	
	Material				Resin, sheet metal	
Dimensions	Unit	Height		mm	840	
		Width		mm	440	
		Depth		mm	390	
	Packed unit	Height		mm	450	
		Width		mm	650	
		Depth		mm	1,016	
Weight	Unit			kg	42.0	
	Packed unit			kg	49	
Packing	Material				Carton / PP (Straps) / EPS	
	Weight			kg	4	
PED	Category				Art4.3 / See note 8	
	Most critical part	Name			Plate heat exchanger	
		Ps*V		Bar*l	38	
Refrigerant side heat exchanger	Type				Plate heat exchanger	
	Quantity				1	
	Plates	Quantity			42	
Pump	Type				DC Motor	
	Nr of speeds				PWM	
	Power input			W	52	
Water side Heat exchanger	Type				Plate heat exchanger	
	Quantity				1	
	Plates	Quantity			42	
	Water volume			l	0.95	
	Water flow rate	Min.		l/min	12.0 (1)	
Expansion vessel	Volume			l	10	
	Max. water pressure			bar	3	
	Pre pressure			bar	1	
Water filter	Diameter perforations			mm	0.8	
	Material				Stainless steel / Plastic	
General	Supplier/ Manufacturer details	Name or trademark			Daikin Europe N.V.	
		Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium	
Water circuit	inch			in	G 1" (female)	
	Piping material				Cu	
	inch			in	1"	
	inch			in	1"	
	Safety valve			bar	3	
	Manometer				Digital	
	Drain valve / fill valve				Yes	
	Shut off valve				Yes	
	Air purge valve				Yes	
	Total water volume			l	3.2	
	Minimum water volume in the system for heating			l	10 (2)	
Refrigerant circuit	Gas side diameter			mm	15.9	
	Liquid side diameter			mm	6.35	
Sound power level	Nom.			dBA	42 (3)	
Sound pressure level	Nom.			dBA	28 (4)	
Operation range	Heating	Ambient	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
		Water side	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
	Indoor installation	Ambient	Min.	°CDB	5	
			Max.	°CDB	35	
	Domestic hot water	Ambient	Min.	°CDB	0 (5)	
			Max.	°CDB	0 (5)	
		Water side	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
Safety devices	Item	01			Thermal cut out	

Electrical specifications				EHBH04E6V	EHBH08E6V
Power supply	Name			See note 7	
	Voltage range	Min.	%	-10	
		Max.	%	10	
IP class	IP			IP X0B	

2 Specifications

2 - 1 Specifications

Electrical specifications				EHBH04E6V	EHBH08E6V
Electric heater	Power supply	Name		6V3	
		Phase		1~ / 3~	
		Frequency	Hz	50	
		Voltage	V	230	
	Current	Maximum running current	A	26.0	
		Zmax Ω		0.22	
		Minimum Ssc value		Equipment complying with EN/IEC 61000-3-12	
	Recommended fuses		A	20.000 (6)	
Wiring connections	Communication cable	Quantity		3	
		Remark		1.5 mm²	
	Electric meter	Quantity		2	
		Remark		Minimum 0.75 mm² (5VDC pulse detection)	
	Preferential kWh rate power supply	Quantity		Power: 2	
		Remark		Power 6.3A (Select diameter and type according to national and local regulations)	
	Domestic hot water pump	Quantity		2	
		Remark		Minimum 0.75 mm² (2A inrush, 1A continuous)	
	For power supply back-up heater	Quantity		Prewired	
		Remark		Select diameter & type according to national & local regulations	
	For connection with R6T	Quantity		2	
		Remark		Minimum 0.75 mm²	
	For connection with A3P	Quantity		Depends on thermostat type, cf. installation manual	
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9	
	For connection with M2S	Quantity		2	
		Remark		Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9	
	For connection with optional FWXV* (demand input and output)	Quantity		4	
		Remark		100 mA, minimum 0.75 mm²	

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |
(2)Excluding the water in the unit. This minimum water volume is sufficient for most applications. During critical processes extra water may be required. |
(3)DB/WB 7°C/6°C - LWC 35°C (DT=5°C) |
(4)Sound values are measured in a semi-anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. Sound power level is an absolute value that a so |
(5)For more details, see operation range drawing |
(6)4 pole 20 A curve 400V tripping class C (refer to wiring diagram) |
(7)Above mentioned power supply for control box is for booster heater only. The switchbox of the controller box is supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |
(8)PED unit category: Art3§3: excluded from scope of PED due to article 1, item 3.6 of 97/23/EC |
(9)Select diameter and type according to national and local regulations

Technical specifications				EHBH08E9W
Heater capacity	Step 1		kW	3
	Step 2		kW	max. 6
Power input	Nom.		kW	0.09
Casing	Colour			White + Black
	Material			Resin, sheet metal
Dimensions	Unit	Height	mm	840
		Width	mm	440
		Depth	mm	390
	Packed unit	Height	mm	450
		Width	mm	650
		Depth	mm	1,016
Weight	Unit		kg	42.4
	Packed unit		kg	49
Packing	Material			Carton / PP (Straps) / EPS
	Weight		kg	4
PED	Category			Art4.3 / See note 8
	Most critical part	Name		Plate heat exchanger
		Ps*V	Bar*l	38
Refrigerant side heat exchanger	Type			Plate heat exchanger
	Quantity			1
	Plates	Quantity		42
Pump	Type			DC Motor
	Nr of speeds			PWM
	Power input		W	52

2 Specifications

2 - 1 Specifications

Technical specifications					EHBH08E9W
Water side Heat exchanger	Type				Plate heat exchanger
	Quantity				1
	Plates	Quantity			42
	Water volume			l	0.95
	Water flow rate	Min.		l/min	12.0 (1)
Expansion vessel	Volume			l	10
	Max. water pressure			bar	3
	Pre pressure			bar	1
Water filter	Diameter perforations			mm	0.8
	Material				Stainless steel / Plastic
General	Supplier/	Name or trademark			Daikin Europe N.V.
	Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium
Water circuit	inch			in	G 1" (female)
	Piping material				Cu
	inch			in	1"
	inch			in	1"
	Safety valve			bar	3
	Manometer				Digital
	Drain valve / fill valve				Yes
	Shut off valve				Yes
	Air purge valve				Yes
	Total water volume			l	3.2
	Minimum water volume in the system for heating			l	10 (2)
Refrigerant circuit	Gas side diameter			mm	15.9
	Liquid side diameter			mm	6.35
Sound power level	Nom.			dBA	42 (3)
Sound pressure level	Nom.			dBA	28 (4)
Operation range	Heating	Ambient	Min.	°C	0 (5)
			Max.	°C	0 (5)
		Water side	Min.	°C	0 (5)
			Max.	°C	0 (5)
	Indoor installation	Ambient	Min.	°CDB	5
			Max.	°CDB	35
	Domestic hot water	Ambient	Min.	°CDB	0 (5)
			Max.	°CDB	0 (5)
		Water side	Min.	°C	0 (5)
			Max.	°C	0 (5)
Safety devices	Item	01			Thermal cut out

Electrical specifications				EHBH08E9W
Power supply	Name			See note 7
	Voltage range	Min.	%	-10
		Max.	%	10
IP class	IP			IP X0B
Electric heater	Power supply	Name		9W
		Phase		3~
		Frequency	Hz	50
		Voltage	V	400
	Current	Maximum running current	A	13.0
	Recommended fuses		A	20.000 (6)

2 Specifications

2 - 1 Specifications

Electrical specifications			EHBH08E9W
Wiring connections	Communication cable	Quantity	3
		Remark	1.5 mm²
	Electric meter	Quantity	2
		Remark	Minimum 0.75 mm² (5VDC pulse detection)
	Preferential kWh rate power supply	Quantity	Power: 2
		Remark	Power 6.3A (Select diameter and type according to national and local regulations)
	Domestic hot water pump	Quantity	2
		Remark	Minimum 0.75 mm² (2A inrush, 1A continuous)
	For power supply back-up heater	Quantity	Prewired
		Remark	Select diameter & type according to national & local regulations
	For connection with R6T	Quantity	2
		Remark	Minimum 0.75 mm²
	For connection with A3P	Quantity	Depends on thermostat type, cf. installation manual
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9
	For connection with M2S	Quantity	2
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9
	For connection with optional FWXV* (demand input and output)	Quantity	4
		Remark	100 mA, minimum 0.75 mm²

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |
(2)Excluding the water in the unit. This minimum water volume is sufficient for most applications. During critical processes extra water may be required. |
(3)DB/WB 7°C/6°C - LWC 35°C (DT=5°C) |
(4)Sound values are measured in a semi-anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. Sound power level is an absolute value that a so |
(5)For more details, see operation range drawing |
(6)4 pole 20 A curve 400V tripping class C (refer to wiring diagram) |
(7)Above mentioned power supply for control box is for booster heater only. The switchbox of the controller box is supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |
(8)PED unit category: Art3§3: excluded from scope of PED due to article 1, item 3.6 of 97/23/EC |
(9)Select diameter and type according to national and local regulations

Technical specifications				EHBX04E6V	EHBX08E6V
Heater capacity	Step 1		kW	2	
	Step 2		kW	2 or 4	
Power input	Nom.		kW	0.09	
Casing	Colour			White + Black	
	Material			Resin, sheet metal	
Dimensions	Unit	Height	mm	840	
		Width	mm	440	
		Depth	mm	390	
	Packed unit	Height	mm	450	
		Width	mm	650	
		Depth	mm	1,016	
Weight	Unit		kg	42.0	
	Packed unit		kg	49	
Packing	Material			Carton / PP (Straps) / EPS	
	Weight		kg	4	
PED	Category			Art4.3 / See note 8	
	Most critical part	Name		Plate heat exchanger	
		Ps*V	Bar*l	38	
Refrigerant side heat exchanger	Type			Plate heat exchanger	
	Quantity			1	
	Plates	Quantity		42	
Pump	Type			DC Motor	
	Nr of speeds			PWM	
	Power input		W	52	
Water side Heat exchanger	Type			Plate heat exchanger	
	Quantity			1	
	Plates	Quantity		42	
	Water volume		l	0.95	
	Water flow rate	Min.	l/min	12.0 (1)	

2 Specifications

2 - 1 Specifications

Technical specifications					EHBX04E6V	EHBX08E6V
Expansion vessel	Volume			l	10	
	Max. water pressure			bar	3	
	Pre pressure			bar	1	
Water filter	Diameter perforations			mm	0.8	
	Material				Stainless steel / Plastic	
General	Supplier/	Name or trademark			Daikin Europe N.V.	
	Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium	
Water circuit	inch			in	G 1" (female)	
	Piping material				Cu	
	inch			in	1"	
	inch			in	1"	
	Safety valve			bar	3	
	Manometer				Digital	
	Drain valve / fill valve				Yes	
	Shut off valve				Yes	
	Air purge valve				Yes	
	Total water volume			l	3.2	
	Minimum water volume in the system for cooling			l	10 (2)	
	Minimum water volume in the system for heating			l	10 (2)	
Refrigerant circuit	Gas side diameter			mm	15.9	
	Liquid side diameter			mm	6.35	
Sound power level	Nom.			dBA	42 (3)	
Sound pressure level	Nom.			dBA	28 (4)	
Operation range	Heating	Ambient	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
		Water side	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
	Indoor installation	Ambient	Min.	°CDB	5	
			Max.	°CDB	35	
	Cooling	Ambient	Min.	°CDB	0 (5)	
			Max.	°CDB	0 (5)	
		Water side	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
	Domestic hot water	Ambient	Min.	°CDB	0 (5)	
			Max.	°CDB	0 (5)	
		Water side	Min.	°C	0 (5)	
			Max.	°C	0 (5)	
Safety devices	Item	01			Thermal cut out	

Electrical specifications					EHBX04E6V	EHBX08E6V
Power supply	Name				See note 7	
	Voltage range	Min.		%	-10	
		Max.		%	10	
IP class	IP				IP X0B	
Electric heater	Power supply	Name			6V3	
		Phase			1~ / 3~	
		Frequency		Hz	50	
		Voltage		V	230	
	Current	Maximum running current		A	26.0	
		Zmax	Ω		0.22	
		Minimum Ssc value			Equipment complying with EN/IEC 61000-3-12	
	Recommended fuses			A	20.000 (6)	

2 Specifications

2 - 1 Specifications

Electrical specifications			EHBX04E6V	EHBX08E6V
Wiring connections	Communication cable	Quantity	3	
		Remark	1.5 mm²	
	Electric meter	Quantity	2	
		Remark	Minimum 0.75 mm² (5VDC pulse detection)	
	Preferential kWh rate power supply	Quantity	Power: 2	
		Remark	Power 6.3A (Select diameter and type according to national and local regulations)	
	Domestic hot water pump	Quantity	2	
		Remark	Minimum 0.75 mm² (2A inrush, 1A continuous)	
	For power supply back-up heater	Quantity	Prewired	
		Remark	Select diameter & type according to national & local regulations	
	For connection with R6T	Quantity	2	
		Remark	Minimum 0.75 mm²	
	For connection with A3P	Quantity	Depends on thermostat type, cf. installation manual	
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9	
	For connection with M2S	Quantity	2	
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9	
	For connection with optional FWXV* (demand input and output)	Quantity	4	
		Remark	100 mA, minimum 0.75 mm²	

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |
(2)Excluding the water in the unit. This minimum water volume is sufficient for most applications. During critical processes extra water may be required. |
(3)DB/WB 7°C/6°C - LWC 35°C (DT=5°C) |
(4)Sound values are measured in a semi-anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. Sound power level is an absolute value that a so |
(5)For more details, see operation range drawing |
(6)4 pole 20 A curve 400V tripping class C (refer to wiring diagram) |
(7)Above mentioned power supply for control box is for booster heater only. The switchbox of the controller box is supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |
(8)PED unit category: Art3§3: excluded from scope of PED due to article 1, item 3.6 of 97/23/EC |
(9)Select diameter and type according to national and local regulations

Technical specifications				EHBX08E9W
Heater capacity	Step 1		kW	3
	Step 2		kW	max. 6
Power input	Nom.		kW	0.09
Casing	Colour			White + Black
	Material			Resin, sheet metal
Dimensions	Unit	Height	mm	840
		Width	mm	440
		Depth	mm	390
	Packed unit	Height	mm	450
		Width	mm	650
		Depth	mm	1,016
Weight	Unit		kg	42.4
	Packed unit		kg	49
Packing	Material			Carton / PP (Straps) / EPS
	Weight		kg	4
PED	Category			Art4.3 / See note 8
	Most critical part	Name		Plate heat exchanger
		Ps*V	Bar*l	38
Refrigerant side heat exchanger	Type			Plate heat exchanger
	Quantity			1
	Plates	Quantity		42
Pump	Type			DC Motor
	Nr of speeds			PWM
	Power input		W	52
Water side Heat exchanger	Type			Plate heat exchanger
	Quantity			1
	Plates	Quantity		42
	Water volume		l	0.95
	Water flow rate	Min.	l/min	12.0 (1)

2 Specifications

2 - 1 Specifications

Technical specifications					EHBX08E9W
Expansion vessel	Volume			l	10
	Max. water pressure			bar	3
	Pre pressure			bar	1
Water filter	Diameter perforations			mm	0.8
	Material				Stainless steel / Plastic
General	Supplier/	Name or trademark			Daikin Europe N.V.
	Manufacturer details	Name and address			Daikin Europe N.V. - Zandvoordestraat 300, 8400 Oostende, Belgium
Water circuit	inch			in	G 1" (female)
	Piping material				Cu
	inch			in	1"
	inch			in	1"
	Safety valve			bar	3
	Manometer				Digital
	Drain valve / fill valve				Yes
	Shut off valve				Yes
	Air purge valve				Yes
	Total water volume			l	3.2
	Minimum water volume in the system for cooling			l	10 (2)
	Minimum water volume in the system for heating			l	10 (2)
Refrigerant circuit	Gas side diameter			mm	15.9
	Liquid side diameter			mm	6.35
Sound power level	Nom.			dBA	42 (3)
Sound pressure level	Nom.			dBA	28 (4)
Operation range	Heating	Ambient	Min.	°C	0 (5)
			Max.	°C	0 (5)
		Water side	Min.	°C	0 (5)
			Max.	°C	0 (5)
	Indoor installation	Ambient	Min.	°CDB	5
			Max.	°CDB	35
	Cooling	Ambient	Min.	°CDB	0 (5)
			Max.	°CDB	0 (5)
		Water side	Min.	°C	0 (5)
			Max.	°C	0 (5)
	Domestic hot water	Ambient	Min.	°CDB	0 (5)
			Max.	°CDB	0 (5)
		Water side	Min.	°C	0 (5)
			Max.	°C	0 (5)
Safety devices	Item	01			Thermal cut out

Electrical specifications				EHBX08E9W
Power supply	Name			See note 7
	Voltage range	Min.	%	-10
		Max.	%	10
IP class	IP			IP X0B
Electric heater	Power supply	Name		9W
		Phase		3~
		Frequency	Hz	50
		Voltage	V	400
	Current	Maximum running current	A	13.0
	Recommended fuses		A	20.000 (6)

2 Specifications

2 - 1 Specifications

Electrical specifications			EHBX08E9W
Wiring connections	Communication cable	Quantity	3
		Remark	1.5 mm²
	Electric meter	Quantity	2
		Remark	Minimum 0.75 mm² (5VDC pulse detection)
	Preferential kWh rate power supply	Quantity	Power: 2
		Remark	Power 6.3A (Select diameter and type according to national and local regulations)
	Domestic hot water pump	Quantity	2
		Remark	Minimum 0.75 mm² (2A inrush, 1A continuous)
	For power supply back-up heater	Quantity	Prewired
		Remark	Select diameter & type according to national & local regulations
	For connection with R6T	Quantity	2
		Remark	Minimum 0.75 mm²
	For connection with A3P	Quantity	Depends on thermostat type, cf. installation manual
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9
	For connection with M2S	Quantity	2
		Remark	Voltage: 230V / Max. current: 100mA / Min. 0.75mm²/ See note 9
	For connection with optional FWXV* (demand input and output)	Quantity	4
		Remark	100 mA, minimum 0.75 mm²

(1)Operation area is extended to lower flow rates only in case the unit operates with heat pump only. (Not in startup, no BUH operation, no defrost operation). |
(2)Excluding the water in the unit. This minimum water volume is sufficient for most applications. During critical processes extra water may be required. |
(3)DB/WB 7°C/6°C - LWC 35°C (DT=5°C) |
(4)Sound values are measured in a semi-anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings. Sound power level is an absolute value that a so |
(5)For more details, see operation range drawing |
(6)4 pole 20 A curve 400V tripping class C (refer to wiring diagram) |
(7)Above mentioned power supply for control box is for booster heater only. The switchbox of the controller box is supplied via the outdoor unit. The optional domestic hot water tank has a separate power supply. |
(8)PED unit category: Art3§3: excluded from scope of PED due to article 1, item 3.6 of 97/23/EC |
(9)Select diameter and type according to national and local regulations

3 Electrical data


3 - 1 Electrical Data


EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

Electrical specifications of the backup heaters and booster heaters

Backup heater	Type				6V					9W				
	Capacity setting			[kW]	2 - 4	2 - 6	·2-4· (in case of emergency: ·2-6·)		6	3 - 6	3 - 9	·3 - 6· (in case of emergency: ·3 - 9·)		
	Capacity stage · ·				2	2	2	2	1	2	2	2	2	
	Capacity stage ·1·			kW	2	2	2	2	6	3	3	3	3	
	Capacity stage ·2·			kW	4	6	4	6	-	6	9	6	9	
	Minimum time delay between stages				Note ·4·					Note ·4·				
	Power supply (1)	Phase			1~				3~	3~				
		Frequency		Hz	50									
		Voltage		V	230 +-10%					400 +-10%				
	Current	Nominal running current		A	17,4	26,1	17,4	26,1	15	8,7	13	8,7	13	
		Zmax (backup (2)		Ω						-				
				Complex	0,22				-	-				
		Minimum Ssc value		kVA	(3)					-				
Booster heater (optional) (·KHW*· models)	Capacity setting			kW	3									
	Capacity stage · ·				1									
	Minimum time delay between stages				Note ·5·									
	Nominal running current		+EK*V3	A	13									
	Booster heater		+EK*Z2		-				75					
	Zmax	Booster heater (2)		Ω	-									
				Complex	-									
	Nominal running current	Backup heater ·+·	Booster heater · Backup heater ·+ EK*V3·	A	30,4 (17,4+13)	39,1 (26,1+13)	30,4 (17,4+13)	39,1 (26,1+13)	28 (15 + 13)	21,7 (8,7+13)	26 (13+13)	21,7 (8,7+13)	26 (13+13	
			Backup heater ·+ EK*Z2·	A					22,5 (15 + 7,5)	16,2 (8,7+7,5)	20,5 (13+7,5)	16,2 (8,7+7,5)	20,5 (13+7,5)	
	Minimum Ssc value	Backup heater ·+·	Booster heater ·+ EK*V3·	kVA	(3)									
			Booster heater ·+ EK*Z2·	kVA	-				(3)	-	(3)	-	(3)	

Notes		
	(1)	The above-mentioned power supply of the hydrobox is for the backup heater only. The optional domestic hot water tank has a separate power supply.
	(2)	In accordance with EN/IEC 61000-3-11, it may be necessary to consult the distribution network operator to ensure that the equipment is connected only to a supply with Zsys ≤ Zmax.
	(3)	The equipment complies with EN/IEC 61000-3-12.
	EN/IEC 61000-3-11	European/International Technical Standard setting the limits for voltage changes, voltage fluctuations and flicker in public low-voltage supply systems for equipment with rated current ≤ 75 A.
	EN/IEC 61000-3-12	European/International Technical Standard setting the limits for harmonic currents produced by equipment connected to public low-voltage systems with input current > 16 A and ≤ 75 A per phase.
	Zsys	System impedance

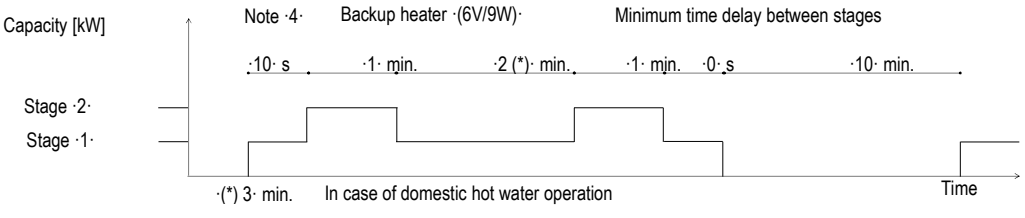

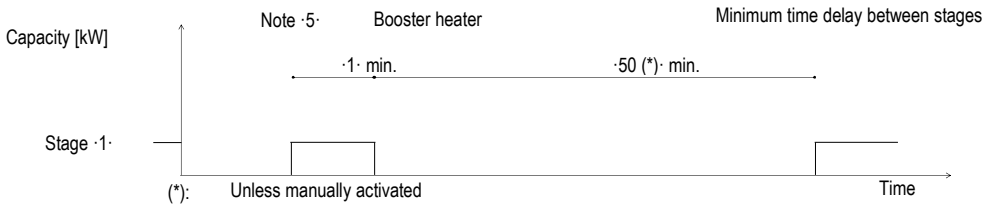

4D112011A

3 Electrical data

3 - 1 Electrical Data

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W / EHVH-E6V / EHVH-E9W / EHVX-E3V / EHVX-E6V / EHVX-E6VG / EHVX-E9W / EHVZ-E6V / EHVZ-E9W

* Electrical meter specification

- Pulse meter type/voltage-free contact for 5 V DC detection by PCB.
- Possible number of pulses
  - ·0.1· pulse/kWh
  - ·1· pulse/kWh
  - ·10· pulse/kWh
  - ·100· pulse/kWh
  - ·1000· pulse/kWh
- Pulse duration
  - minimum On time: ·40ms·
  - Minimum OFF time: ·100ms·
- Measurement type (depending on installation)
  - Single-phase AC meter
  - Three-phase AC meter
    - Balanced loads
  - Three-phase AC meter
    - Unbalanced loads

* Electrical meter installation guideline

- It is the responsibility of the installer to cover the complete power consumption with electrical meters (combination of estimation metering is not allowed).
- Required number of electrical meters

Outdoor unit type		ERGA(04/06/08)(D/E)AV3(H)(7)							ERLA03DAV3
Indoor unit type		*HB(H/X)(04/08)(D/E)A*			*HV(H/X)(04/08)(D/E)(A/J)*				EHF*03S18DJ3V
	Backup heater type	6V		9W	3V	6V		9W	3V
	Backup heater power supply	1~230V	3~230V	3~400V	1~230V	1~230V	3~230V	3~400V	1~230V
	Backup heater configuration	2/4/6kW	6kW	3/6/9kW	3kW	2/4/6kW	6kW	3/6/9kW	3kW
		Normal kWh rate power supply							
Electrical meter type	1~	1	-	-	1	1	-	-	1
	3~ balanced	-	-	-	-	-	-	-	-
	3~ unbalanced	-	1	1	-	-	1	1	-
		Preferential kWh rate power supply							
Electrical meter type	1~	2	1	1	2	2	1	1	2
	3~ balanced	-	-	-	-	-	-	-	-
	3~ unbalanced	-	1	1	-	-	1	1	-

Immersion heater (no backup heater)

Outdoor unit type		ERGA(04/06/08)(D/E)AV3(H)(7)
Indoor unit type		*HV(H/X)(04/08)D(A/J)V
	Backup heater type	Booster heater (·2.4· kW)
	Immersion heater power supply	1~
		230V
		Normal kWh rate power supply
Electrical meter type	1~	1
	3~ balanced	-
	3~ unbalanced	-
		Unit preferential kWh rate power supply
Electrical meter type	1~	2
	3~ balanced	-
	3~ unbalanced	-

4D113240D

4 Combination table

4 - 1 Combination Table

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

Factory-mounted equipment for ·EHB(H/X)*E(A/F)*·

Description	EHB(H/X)04E(A/F)6V	EHB(H/X)08E(A/F)*	
Heating only model ·EHBH*·	6V (9)	6V (9)	9W (9)
Reversible model ·*HBX*·	6V (9)	6V (9)	9W (9)
Backup heater ·2-4-6kW 1N~230 V·	o	o	-
Backup heater ·2-4-6kW 3~230 V·	o	o	-
Backup heater ·3-6-9kW 3N~400 V·	-	-	o

Outdoor combination table for ·EHB(H/X)(04/08)E(A/F)*·

	Description	ERGA04EAV3	ERGA06EAV3	ERGA08EAV3	ERGA04EAV3A	ERGA06EAV3A	ERGA08EAV3A
EHBH04E(A/F)*	Heating only indoor unit	o	---	---	o	---	---
EHBX04E(A/F)*	Reversible indoor unit	o	---	---	o	---	---
EHBH08E(A/F)*	Heating only indoor unit	---	o	o	---	o	o
EHBX08E(A/F)*	Reversible indoor unit	---	o	o	---	o	o

	Description	ERGA04EAV37	ERGA04EAV3H	ERGA06EAV3H	ERGA08EAV3H	ERGA08EAV3H7
EHBH04E(A/F)*	Heating only indoor unit	o	o	---	---	---
EHBX04E(A/F)*	Reversible indoor unit	o	o	---	---	---
EHBH08E(A/F)*	Heating only indoor unit	---	---	o	o	o
EHBX08E(A/F)*	Reversible indoor unit	---	---	o	o	o

Kit availability

Reference	Description		EHB*(04/08)E(AF)*		
EHBH*	Heating only indoor unit		04 - 6V	08 - 6V	08 - 9W
EHBX*	Reversible indoor unit		04 - 6V	08 - 6V	08 - 9W
EKRP1HBAA	Digital I/O PCB	*(1) (2)	o	o	o
EKRP1AHTA	Demand PCB	*(3)	o	o	o
EKPCCAB4	PC cable	*(4)	o	o	o
EKHWS(P)150D3V3	Domestic hot water tank ·150 l 1~230 V·		o	o	o
EKHWS(P)180D3V3	Domestic hot water tank ·180 l 1~230 V·		o	o	o
EKHWS(P)200D3V3	Domestic hot water tank ·200 l 1~230 V·		o	o	o
EKHWS(P)250D3V3	Domestic hot water tank ·250 l 1~230 V·		o	o	o
EKHWS(P)300D3V3	Domestic hot water tank ·300 l 1~230 V·		o	o	o
EKHWSU150D3V3	Domestic hot water tank ·150 l 1~230 V·		o	o	o
EKHWSU180D3V3	Domestic hot water tank ·180 l 1~230 V·		o	o	o
EKHWSU200D3V3	Domestic hot water tank ·200 l 1~230 V·		o	o	o
EKHWSU250D3V3	Domestic hot water tank ·250 l 1~230 V·		o	o	o
EKHWSU300D3V3	Domestic hot water tank ·300 l 1~230 V·		o	o	o
EKHWP300BA	Domestic hot water tank with solar connection	*(5)	o	o	o
EKHWP500BA	Domestic hot water tank with solar connection	*(5)	o	o	o
EKHWP300PBA	Domestic hot water tank with solar connection	*(5)	o	o	o
EKHWP500PBA	Domestic hot water tank with solar connection	*(5)	o	o	o
EKHY3PART	Third-party tank connection kit for thermistor pocket		o	o	o
EKHY3PART2	Third-party tank connection kit for thermostat contact		o	o	o
BZKA7V3	Bizone kit		o	o	o
KRCS01-1	Remote indoor sensor	*(6)	o	o	o
EKRSCA1	Remote sensor for outdoor	*(6)	o	o	o
BRP069A71	WLAN module	*(7)	o	o	o
BRC1HH*	HCI (Human Comfort Interface)		o	o	o
EKRELSG	Relay for Smart Grid		o	o	o
EKHBCONV	Conversion kit: heating only to reversible.		o	o	o
FWXT10ATV3	Heat pump convector		o	o	o
FWXT15ATV3	Heat pump convector		o	o	o
FWXT20ATV3	Heat pump convector		o	o	o
EKRTWA	Wired room thermostat		o	o	o
EKRTR1	Wireless room thermostat		o	o	o
EKRTETS	External sensor room thermostat	*(8)	o	o	o

Notes

(1) PCB that provides additional output connections: · ·
- (a) Control external heat source (bivalent operation).
- (b) Output remote ON/OFF signal space heating/cooling OR bottom plate heater ·*KBPHTH16* · control.
- (c) Remote alarm output

(2) Additional relays to allow bivalent control in combination with an external room thermostat are field-supplied.

(3) PCB to receive up to 4 digital inputs for power limitation, only for ·EHB(H/X)(04/08)E(A/F)*·.

(4) Data cable for connection with PC.

(5) Dedicated connection kit available: ·*KSRPS4A·.

(6) Only 1 remote sensor can be connected: indoor OR outdoor sensor.

(7) The WLAN cartridge is supplied in the accessory bag of the unit and is meant to be plugged into the SD card slot on the MMI-2. In case of bad signal reception, the WLAN cartridge can be removed and replaced by the WLAN module.

(8) Can only be used in combination with wireless room thermostat ·EKRTR1·.

(9) The backup heater capacity depends on a user interface setting.

Remark

Other combinations than mentioned in this combination table are prohibited.


3D130018D

5 Dimensional drawings

5 - 1 Dimensional Drawings

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

1. Holes ·(Ø8.5)· for wall fixation
2. Water out connection ·(1" F BSP)·
3. Water in connection ·(1" F BSP)·
4. Refrigerant liquid connection ·Ø6.35· Flare connection
5. Refrigerant gas connection ·Ø15.9· Flare connection
6. Pump
7. User interface
8. Safety valve Pressure
9. Air purge
10. Expansion vessel
11. Magnetic filter / dirt separator
12. Heat exchanger (refrigerant / water)
13. Shut-off valves
14. Wire entrance of the power supply / communication wire
15. Service door
16. Switch box terminals
17. Switch box terminals for the domestic hot water tank (option)
18. Backup heater
19. Refrigerant pressure sensor
20. Space heating water pressure sensor
21. Options

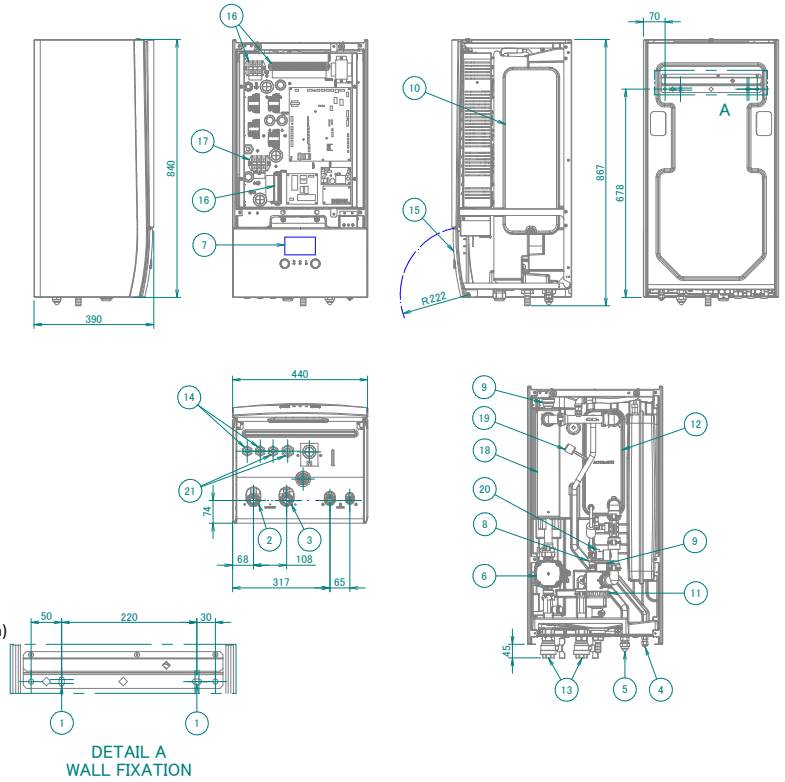


3D111842A

6 Centre of gravity

6 - 1 Centre of Gravity


EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

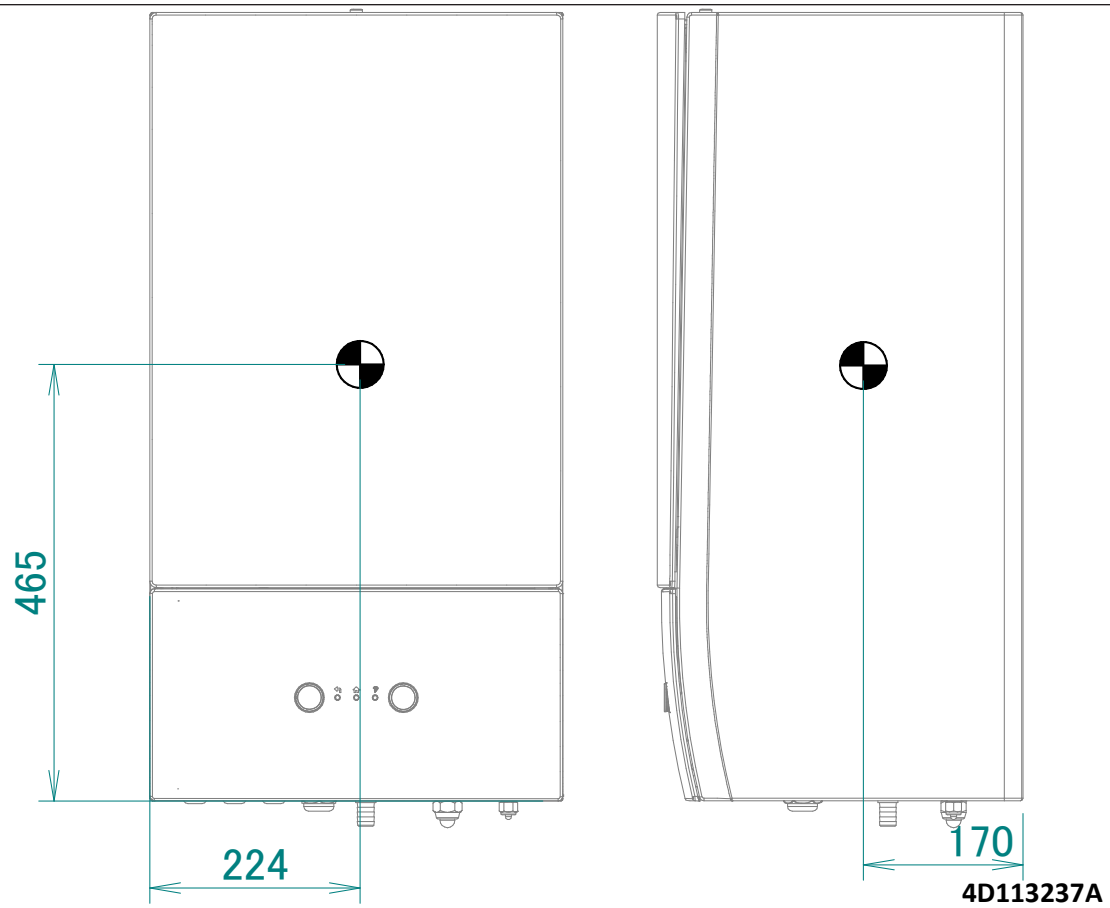

7 Piping diagrams

7 - 1 Piping Diagrams

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

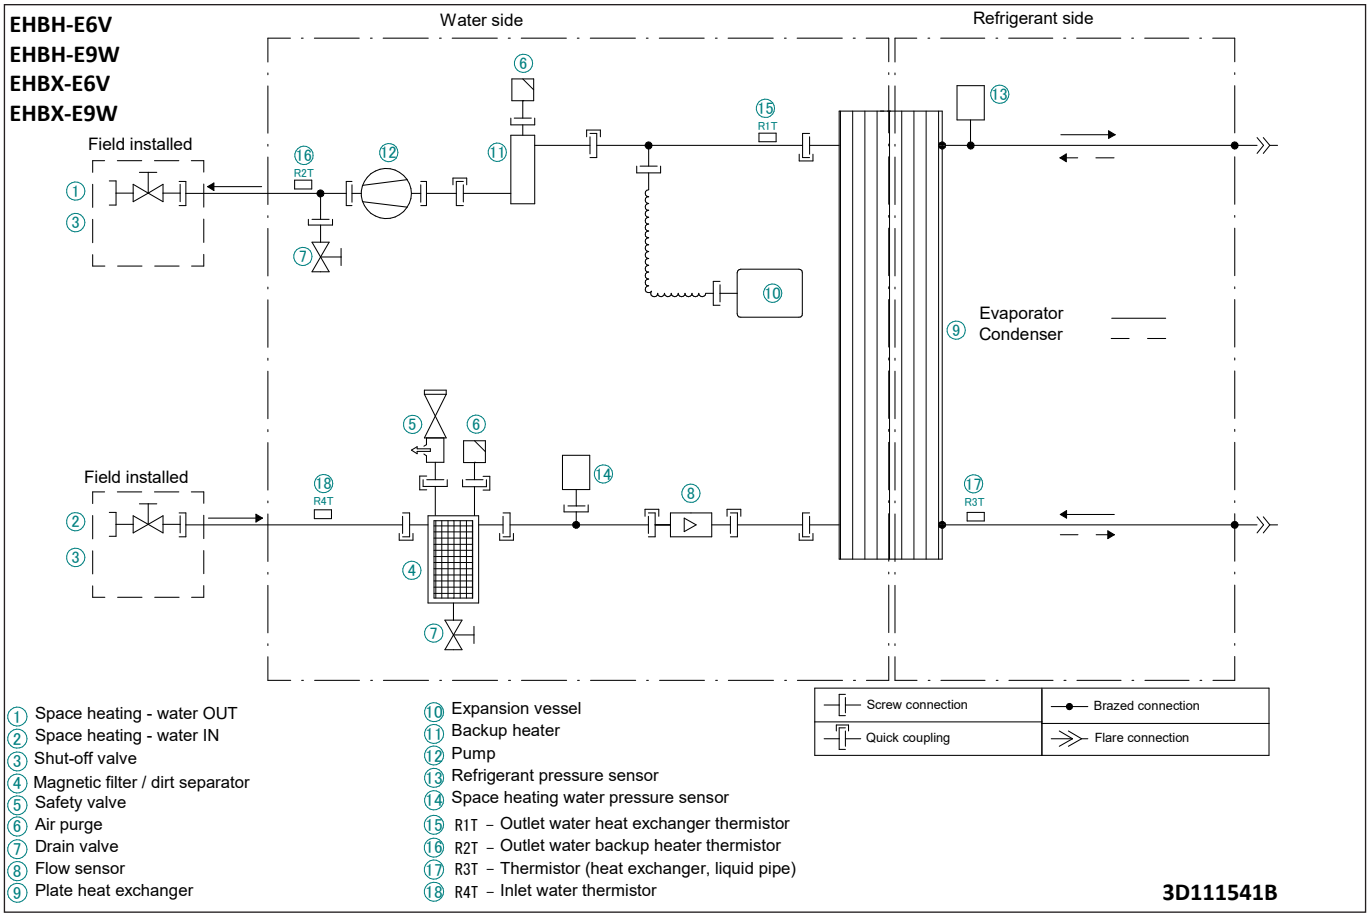

① Space heating - water OUT
② Space heating - water IN
③ Shut-off valve
④ Magnetic filter / dirt separator
⑤ Safety valve
⑥ Air purge
⑦ Drain valve
⑧ Flow sensor
⑨ Plate heat exchanger
⑩ Expansion vessel
⑪ Backup heater
⑫ Pump
⑬ Refrigerant pressure sensor
⑭ Space heating water pressure sensor
⑮ R1T – Outlet water heat exchanger thermistor
⑯ R2T – Outlet water backup heater thermistor
⑰ R3T – Thermistor (heat exchanger, liquid pipe)
⑱ R4T – Inlet water thermistor

3D111541B

8 Wiring diagrams

8 - 1 Notes & Legend

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

NOTES to go through before starting the unit

X1M	: Main terminal
X2M	: Field wiring terminal for AC
X5M	: Field wiring terminal for DC
X6M	: BUH Power supply terminal
X7M, X8M	: BSH Power supply terminal
X10M	: Smartgrid terminal
—·—·—·—	: Earth wiring
– – – – – –	: Field supply
(1)	: Several wiring possibilities

: Option

: Wiring depending on model

: Not mounted in switch box

: PCB

NOTES

1. Connection point of the power supply for the BUH/BSH should be foreseen outside the unit.


Backup heater power supply
- ☐ 6T1 (3~, 230V, 6kW)
- ☐ 6V3 (1N~, 230V, 6kW)
- ☐ 6WN/9WN (3N~, 400V, 6/9kW)

User installed options:
- ☐ LAN adapter
- ☐ Domestic hot water tank
- ☐ Remote user interface
- ☐ Ext. indoor thermistor
- ☐ Ext. outdoor thermistor
- ☐ Digital I/O PCB
- ☐ Demand PCB
- ☐ Safety thermostat
- ☐ Smartgrid kit
- ☐ WLAN adapter module
- ☐ WLAN cartridge

Main LWT:
- ☐ ON/OFF thermostat (wired)
- ☐ ON/OFF thermostat (wireless)
  - ☐ Ext. thermistor
- ☐ Heat pump convector

Add LWT:
- ☐ ON/OFF thermostat (wired)
- ☐ ON/OFF thermostat (wireless)
  - ☐ Ext. thermistor
- ☐ Heat pump convector

POSITION IN SWITCH BOX

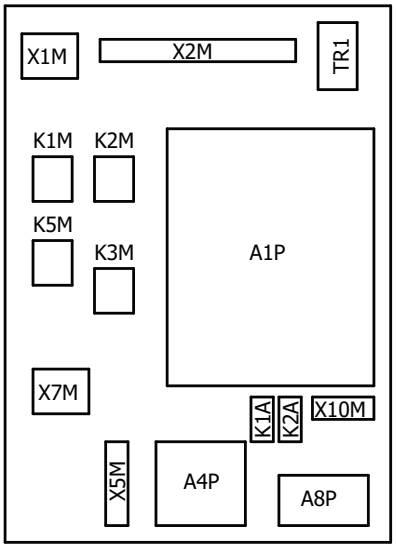

LEGEND

Part n°		Description
A1P		main PCB
A2P	*	ON/OFF thermostat (PC=power circuit)
A3P	*	heat pump convector
A4P	*	digital I/O PCB
A8P	*	demand PCB
A9P		status indicator
A11P		MMI main PCB
A13P	*	LAN adapter
A14P	*	user interface PCB
A15P	*	receiver PCB (wireless ON/OFF thermostat)
A20P	*	WLAN module
B2L		flow sensor
B1PR		refrigerant pressure sensor
B1PW		water pressure sensor
BSK (A3P)		solar pump station relay
CN* (A4P)	*	connector
DS1 (A8P)	*	dipswitch
E1H		backup heater element (1 kW)
E2H		backup heater element (2 kW)
E4H	*	booster heater (3kW)
E*P (A9P)		indication LED
F1B	#	overcurrent fuse backup heater
F2B	#	overcurrent fuse booster heater
F1T		thermal fuse backup heater
F1U, F2U (A4P)	*	fuse 5 A 250 V for digital I/O PCB
FU1 (A1P)		fuse T 6.3 A 250 V for PCB
K1A, K2A	*	high voltage smartgrid relay
K1M, K2M		contactor backup heater
K3M	*	contactor booster heater
K5M		safety contactor BUH
K*R (A1P-A4P)		relay on PCB
M1P		main supply pump
M2P	#	domestic hot water pump
M2S	#	2 way valve for cooling mode
M3S	*	3 way valve for spaceheating/domestic hot water

Part n°		Description
P1M		MMI display
PC (A15P)	*	power circuit
PHC1 (A4P)	*	optocoupler input circuit
Q1L		thermal protector backup heater
Q2L	*	thermal protector booster heater
Q4L	#	safety thermostat
Q*DI	#	earth leakage circuit breaker
R1H (A2P)	*	humidity sensor
R1T (A1P)		outlet water heat exchanger thermistor
R1T (A2P)	*	ambient sensor ON/OFF thermostat
R1T (A14P)	*	ambient sensor user interface
R2T (A1P)		outlet backup heater thermistor
R2T (A2P)	*	external sensor (floor or ambient)
R3T		refrigerant liquid side thermistor
R4T		inlet water thermistor
R5T	*	domestic hot water thermistor
R6T	*	external indoor or outdoor ambient thermistor
S1S	#	preferential kWh rate PS contact
S2S	#	electrical meter pulse input 1
S3S	#	electrical meter pulse input 2
S4S	#	smart grid feed-in
S6S-S9S	*	digital power limitation inputs
S10S-S11S	#	low voltage smartgrid contact
SS1 (A4P)	*	selector switch
SW1~2 (A12P)		turn buttons
SW3~5 (A12P)		push button
TR1		power supply transformer
X6M	#	BUH power supply terminal strip
X6M	*	BSH power supply connector
X7M, X8M	*	BSH power supply terminal strip
X10M	*	smartgrid power supply terminal strip
X*, X*A, X*H*, X*Y		connector
X*M		terminal strip


* : optional #: field supply

4D130332D

8 Wiring diagrams

8 - 2 Control Circuit

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

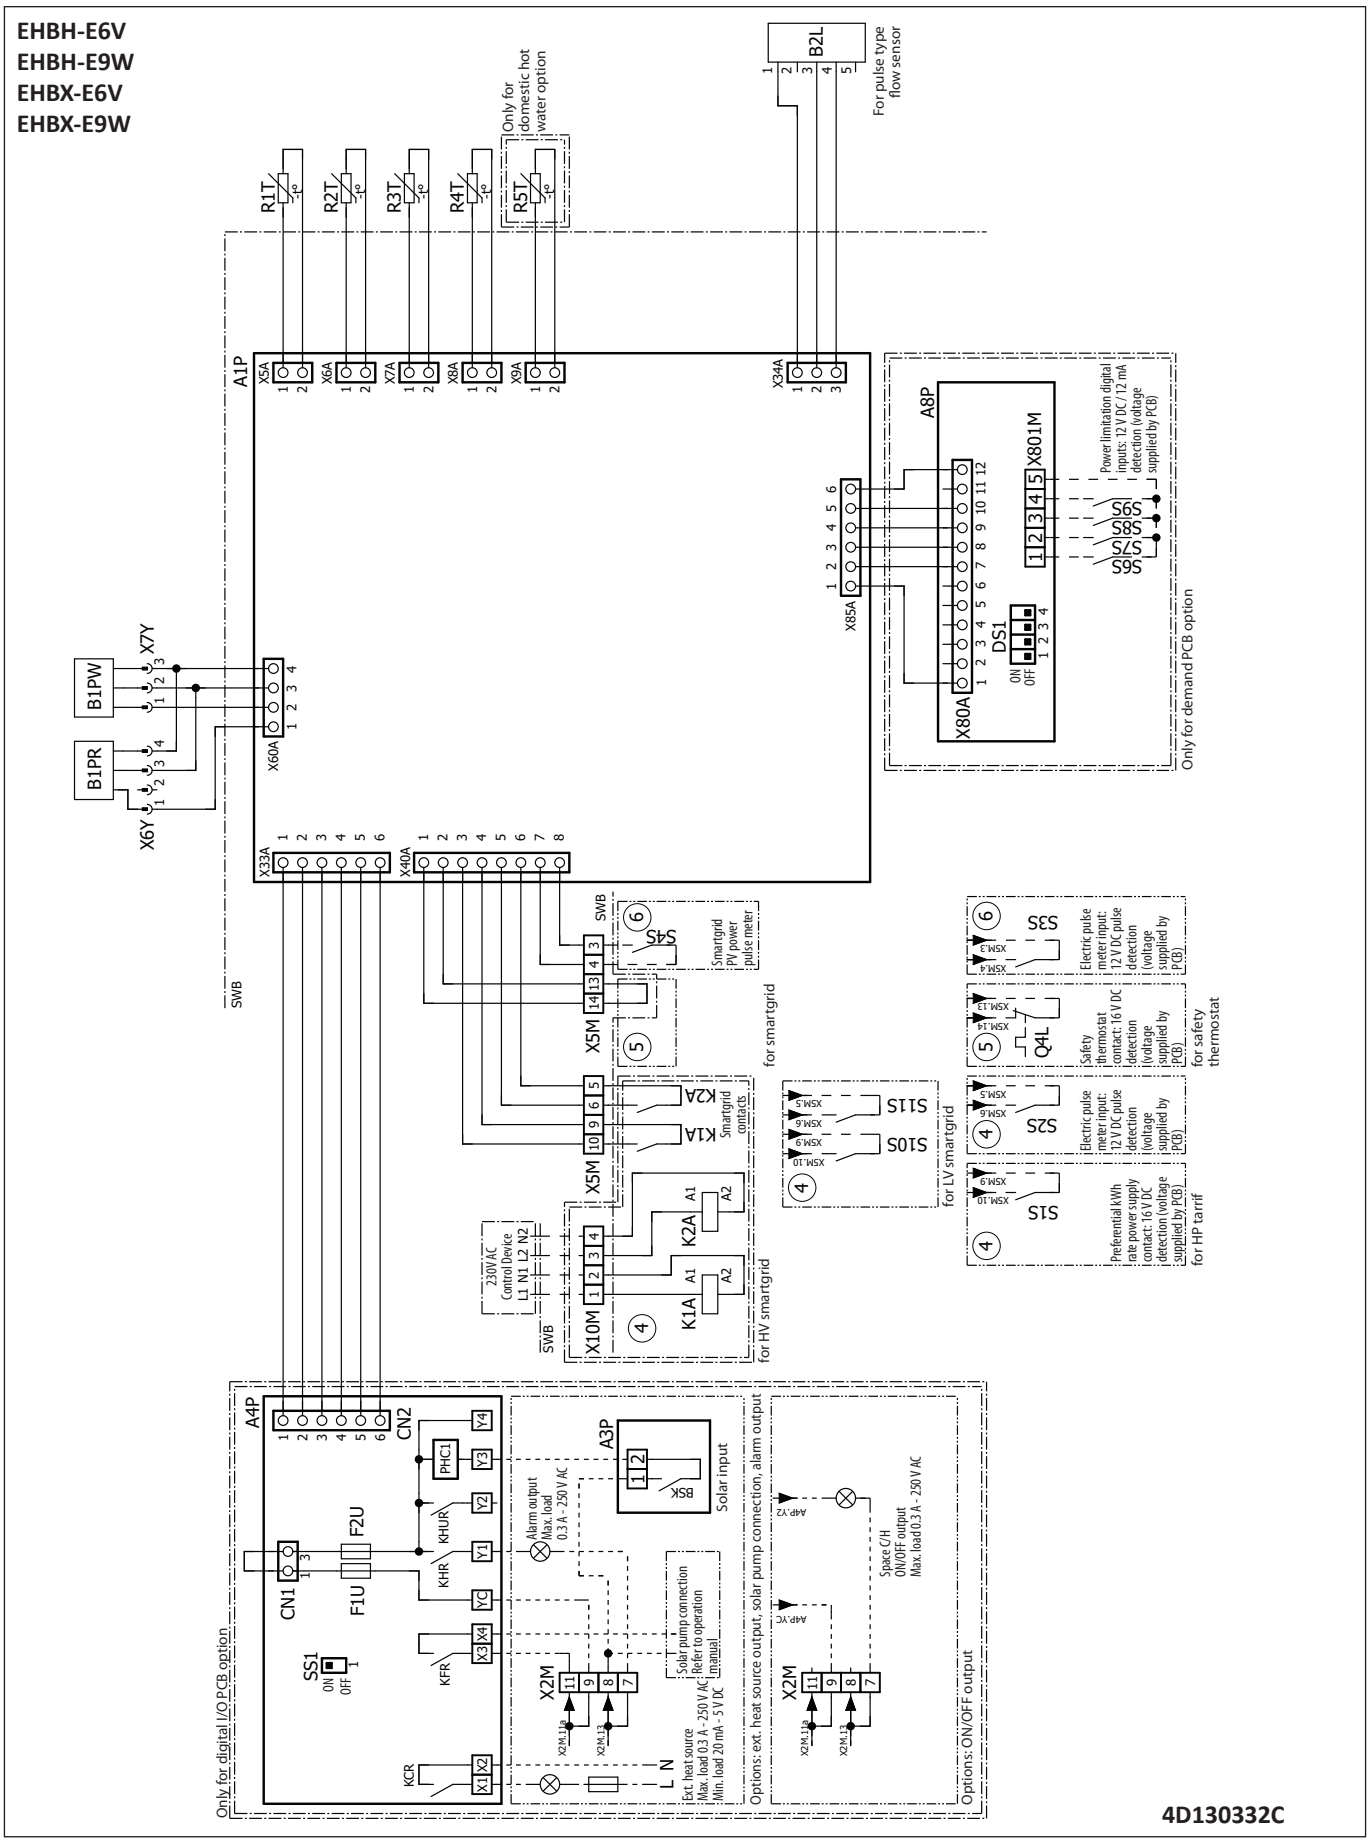


4D130332C

8 Wiring diagrams

8 - 2 Control Circuit

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

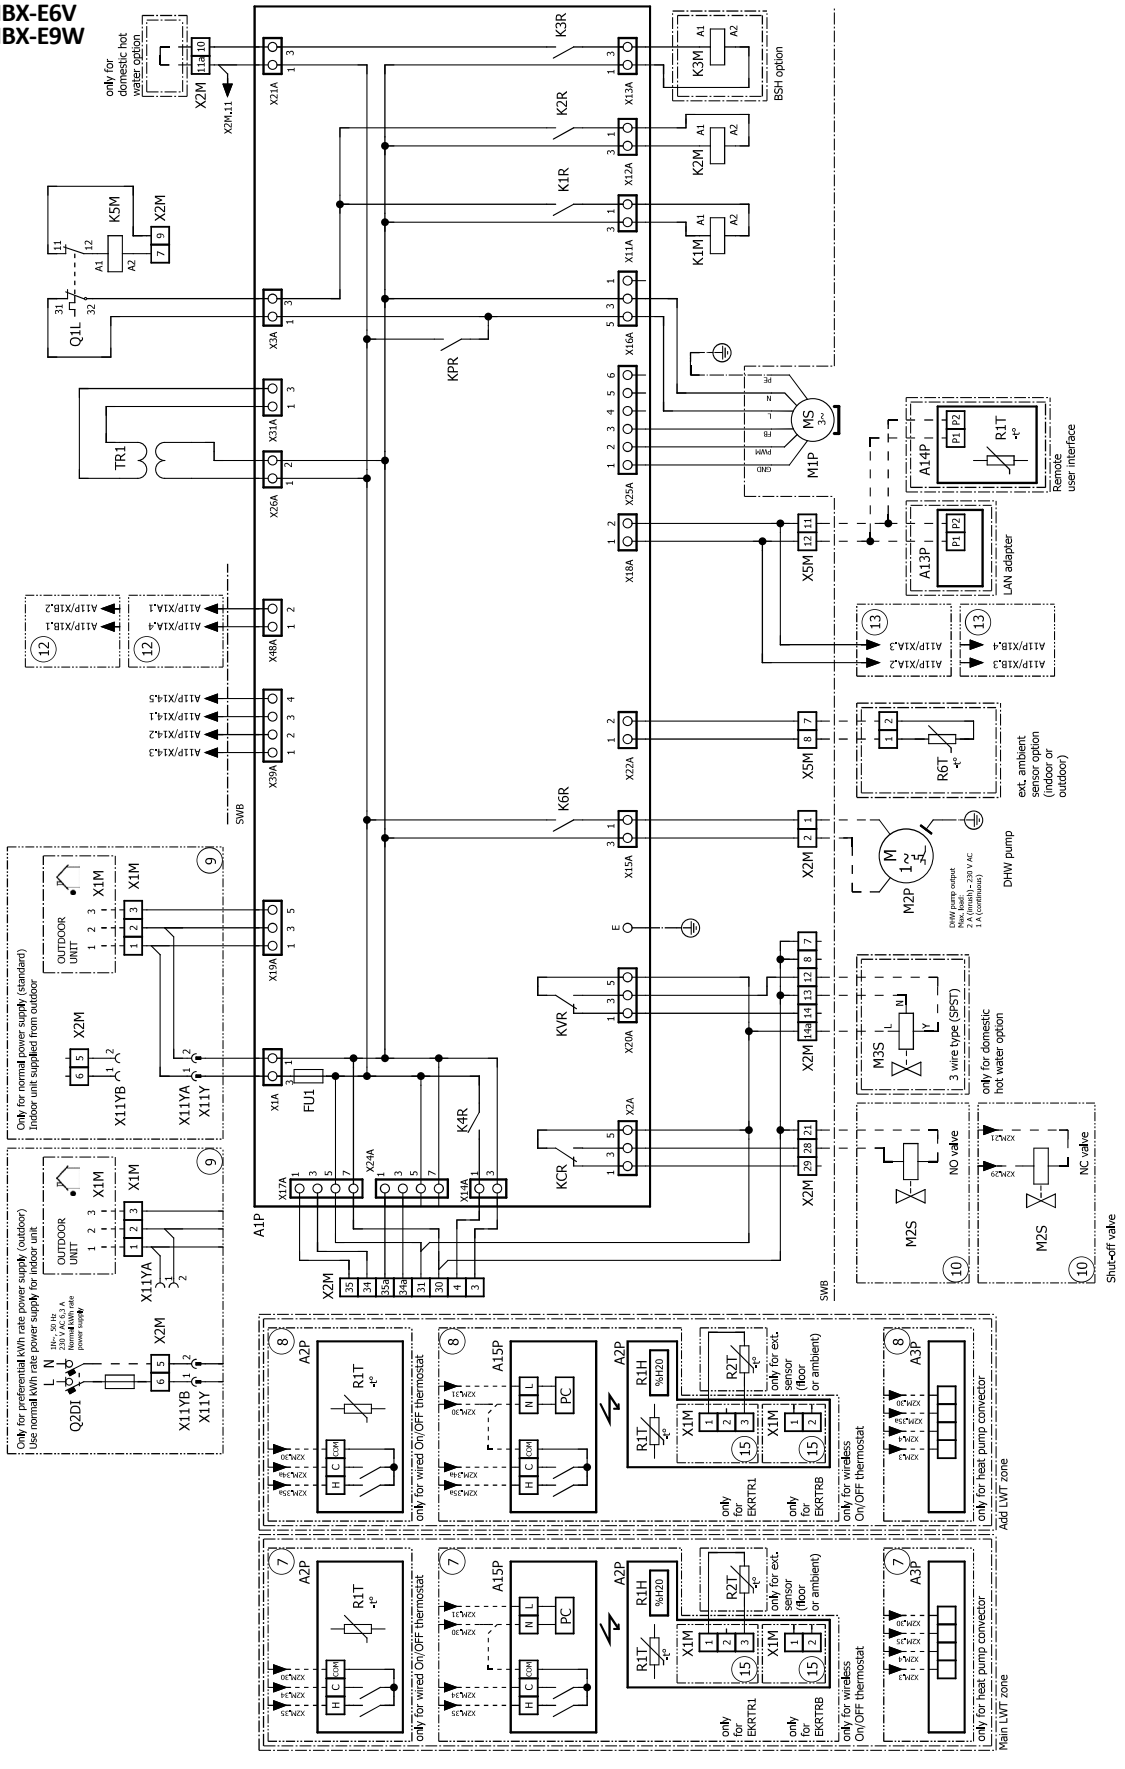


4D130332F

8 Wiring diagrams

8 - 2 Control Circuit

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

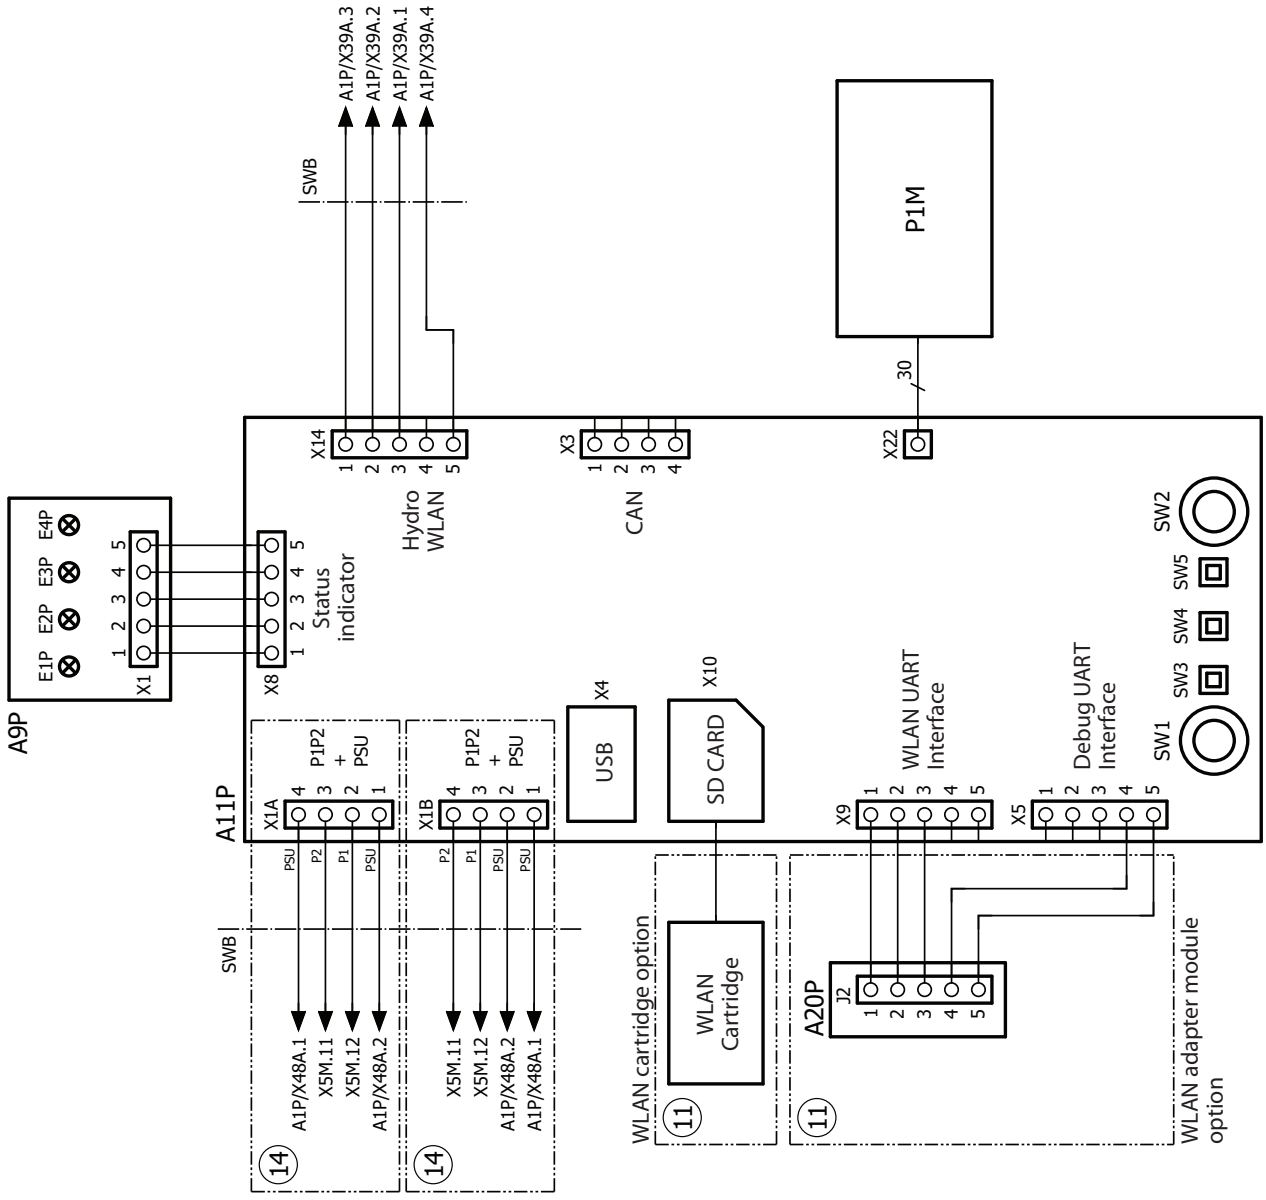


4D130332B

8 Wiring diagrams

8 - 3 Power Supply, Back-up Heater


EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

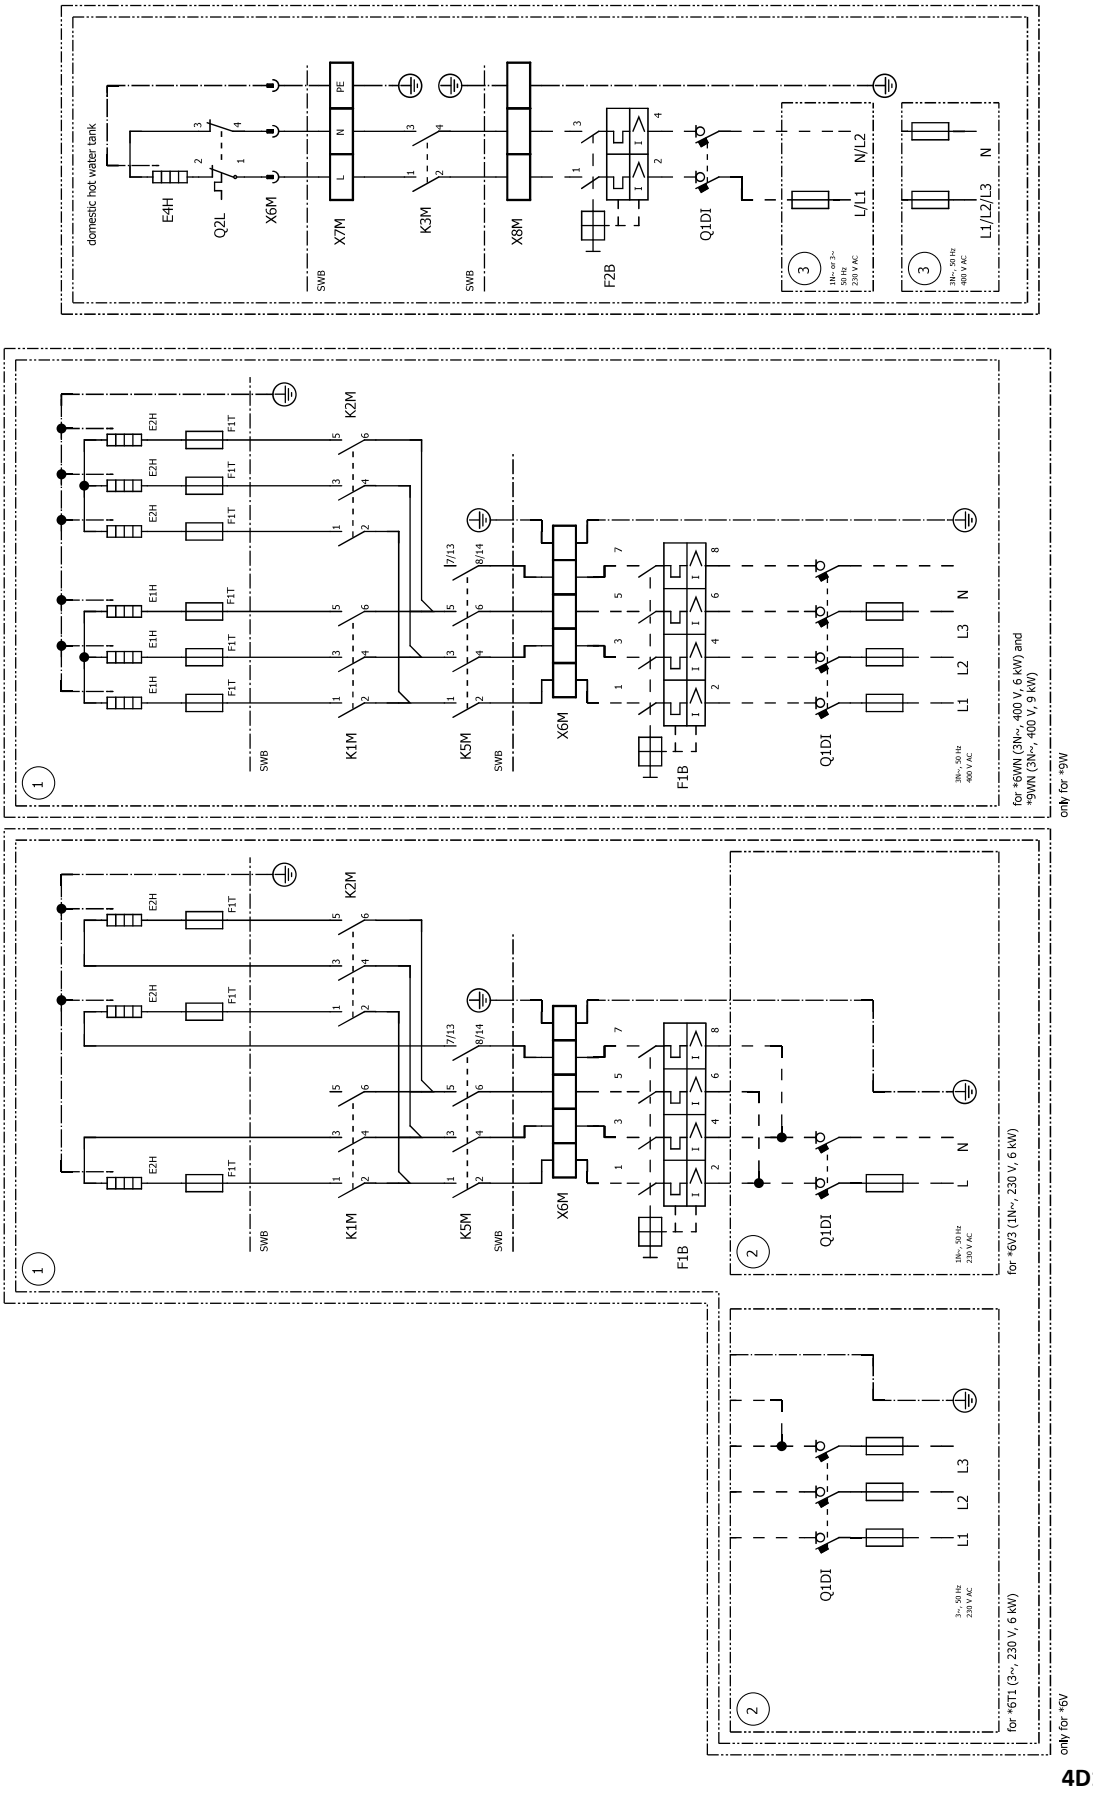

9 External connection diagrams

9 - 1 External Connection Diagrams

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

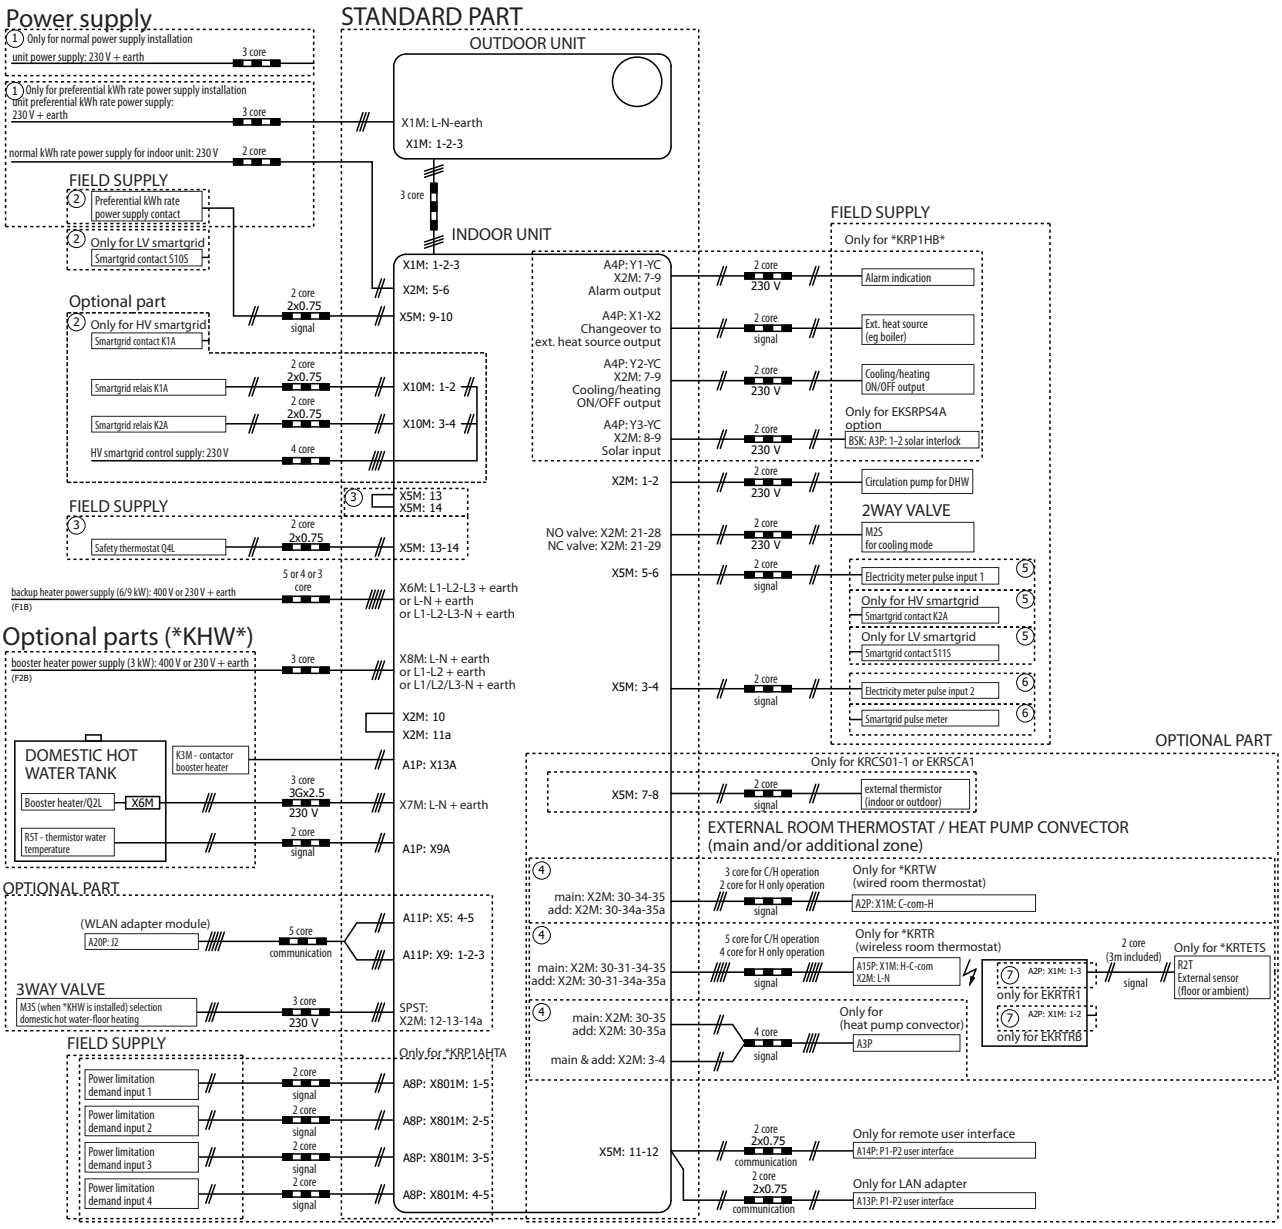

NOTE


- In case of signal cable: keep minimum distance to power cables > 5 cm
- Available heaters depending on model: see combination table

4D130334D

10 Installation

10 - 1 Installation Method

EHBH-E6V
EHBH-E9W
EHBX-E6V
EHBX-E9W

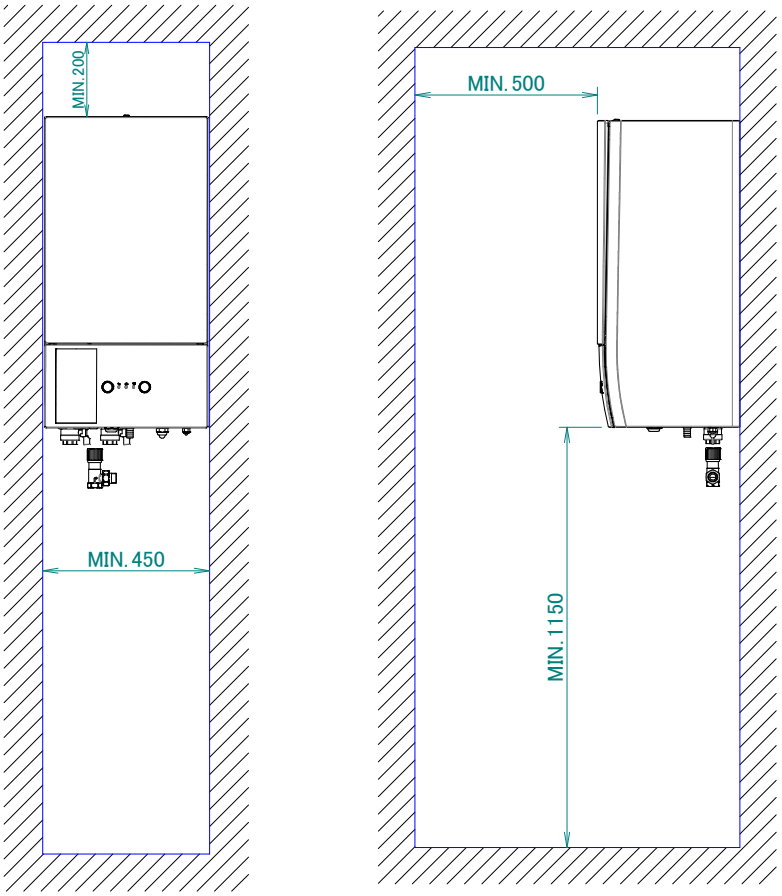



3D112533A

11 Operation range

11 - 1 Operation Range

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W
EHSH-E / EHSHB-E / EHSX-E / EHSXB-E
EHVH-E6V / EHVH-E9W / EHVX-E3V
EHVX-E6V / EHVX-E6VG / EHVX-E9W / EHVZ-E6V / EHVZ-E9W

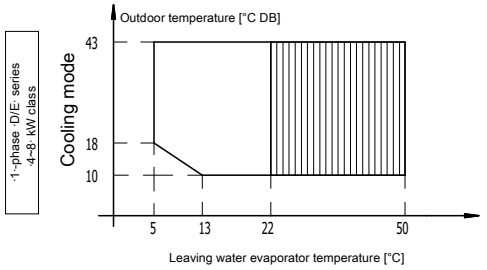

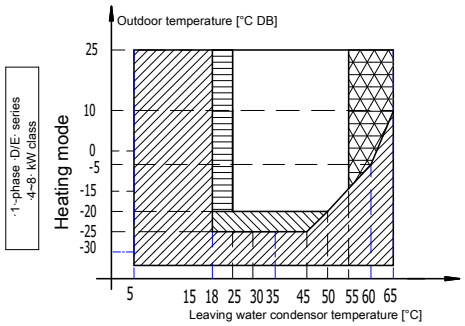

Indoor
·D/E(A/F/G/J)· series Standard

Legend

Backup heater only operation
No outdoor unit operation

Outdoor unit operation if setpoint ≥ ·25°C·

Operation of outdoor unit possible, but with possible capacity reduction.
If the outdoor temperature < –25°C, the outdoor unit will stop.
Indoor unit and backup heater operation will continue.

Pull-down area

Outdoor unit operation if setpoint >·55·°C and ΔT = ·10·°C (ΔT = outlet temperature – inlet temperature)

Remark

In restricted power supply mode, the outdoor unit, booster heater and backup heater can only operate separately.


Warning

In areas with low ambient temperatures and high humidity, or in areas with heavy snowfall, remove the suction grille to ensure proper operation.

Non-exhaustive list of areas: Austria, Czech Republic, Denmark, Estonia, Finland, Germany, Hungary, Latvia, Lithuania, Norway, Poland, Romania, Serbia, Slovakia, Sweden, …

3D111563E

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W
EHSH-E / EHSHB-E / EHSX-E / EHSXB-E
EHVH-E6V / EHVH-E6VG / EHVH-E9W / EHVX-E3V / EHVX-E6V / EHVX-E9W / EHVZ-E6V / EHVZ-E9W

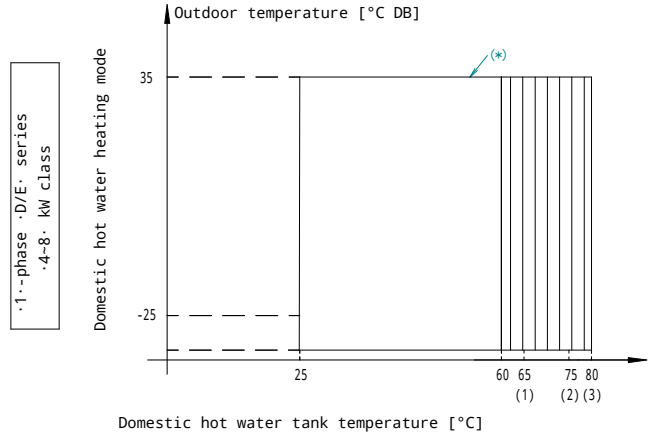

Legend

Booster heater only operation (if a booster heater is part of the system)

(1) ·EHVH*S*CBV· indoor units only
(2) Combination of ·EKHWS(P)1*DA*· and ·EHB*D/E(A/F)V*· indoor units
(3) Combination of ·EKHWS(P)(2/3)*DA*· and ·EHB*D/E(A/F)V*· indoor units

(*)
System operation: the system consists of an outdoor unit and indoor unit, and depending on the system, a booster heater and/or a backup heater.

Remark

In restricted power supply mode (·EKHW*· only), the outdoor unit, booster heater and backup heater can only operate separately.

If the outdoor temperature ·<-20·°C, then outdoor unit operation is possible, but with a possible capacity reduction.

If the outdoor temperature < –25°C, the outdoor unit will stop.


Indoor unit and backup heater operation will continue.

3D111564K

12 Hydraulic performance

12 - 1 Static Pressure Drop Unit

EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

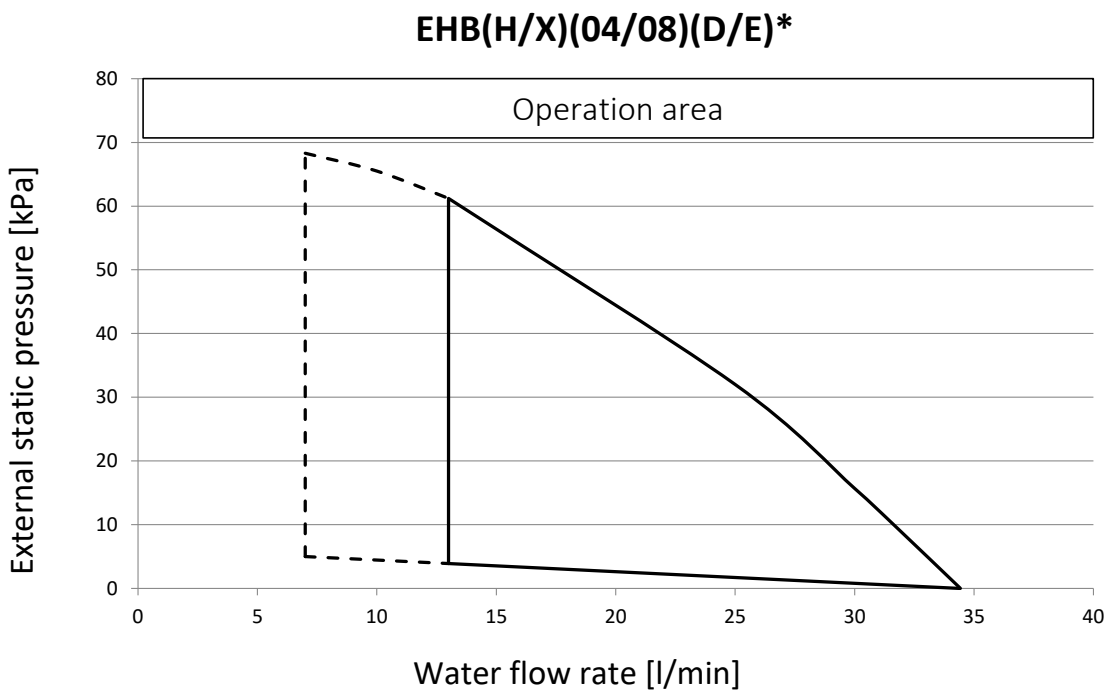

Operation area is extended to lower flow rates only in case the unit operates with heat pump only.

See dashed lines

Notes

1 Selecting a flow outside the operating area can damage the unit or cause the unit to malfunction.
See also the minimum and maximum allowed water flow range in the technical specifications.

2 Water quality must be according to EU directive 98/83 EC.

4D112014B

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)

EEDEN25A 06/2025

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.